

Sears

...WHERE AMERICA SHOPS

CRAFTSMAN® 1977-78 POWER AND HAND TOOL CATALOG

AN OUTSTANDING VALUE for this complete 9-inch Table Saw Outfit

Includes motorized saw,
2 extensions
and steel legs

\$159⁹⁵

CUTTING BLADE, CAPACITIES: 9-inch combination blade cuts wood up to 2 inches thick at 90°, 1 7/8 inches thick when tilted to 45°. Blade and motor tilt for bevel cuts. Bevel scale shows degree of blade tilt, has positive stops at 90° and 45°. Aluminum miter gauge slides in grooves on either side of blade. Table surface in front of blade at 1-inch cutting depth is 11 1/2 inches. Easy-to-align, lift-off rip fence locks front and rear with one knob . . . can be conveniently lifted off and replaced at any point. Rip fence positions on either side of blade for rips up to 14 1/2 inches wide on left side, up to 13 1/2 inches wide on right side. See-thru blade guard stays in raised position for ease of blade changing. Spreader helps minimize blade binding. Anti-kickback pawls help reduce chance of wood kicking back.

TABLE: Solid cast-aluminum table for accurate cutting results. Measures 17x20 inches overall.

EXTENSIONS: Two 10x20-inch formed steel extensions provide additional work surface . . . give you a total work area of 37x20 in. Attach to sides of saw, hardware included.

LEGS: Steel legs provide sturdy support. Rubber-padded leveling feet adjust to uneven or sloping floors and resist creeping. Attach to saw base with hardware included.

MOTOR: Built-in 3/4-HP motor develops 1.6 HP. Blade mounts to motor shaft so there is no power loss by transmission. Capacitor-start, induction-run, no motor brushes to repair or replace . . . causes no television interference like saws with universal motors. Requires little maintenance. Permanently lubricated ball bearings. 3450 rpm.

ELECTRICAL INFORMATION: Pull-on/push-off power switch with removable locking key. Runs on 120-volt, 60-Hertz AC. 1050 full-load input watts. With 6-foot, 3-wire cord. UL listed.

ORDERING INFORMATION: See Warranty on pg. 5. Order safety goggles on pg. 75, caster set on pg. 22.

9 HT 24 192N—Shipping weight 92 lbs. . . \$159.95



INDEX ON PAGE 83

Last date to order from this catalog is July 25, 1978

SEARS, ROEBUCK AND CO.

Satisfaction Guaranteed or Your Money Back



Please mention the key-letter at left when ordering by phone from this catalog



TO ORDER CALL SEARS

CUPERTINO, CA

996-1600

TO CHECK ON ORDER CALL
255-0222

Sears CREDIT CARD
SEARS, ROEBUCK AND CO.

WRITE YOUR ACCOUNT NUMBER ABOVE

YOU CAN DO MORE...

Look for this emblem throughout this catalog to help you match your power tools with the proper accessories...

For over 50 years our CRAFTSMAN® Power Tools have DONE THE BASIC JOB, and have done it well... add the right accessories and YOU CAN DO EVEN MORE

DO MORE with your RADIAL SAW



Dado, plough, lap joint, groove, and rabbet with Dados (1) thru (5) on page 23



Make beautiful picture frames with Molding Head and Cutter Bit Sets on page 23



Sand curved and irregular shaped objects with Sanding Drum (13) on page 20

DO MORE with your ROUTER



Turn your Router into a Wood Lathe with our exclusive Router Crafter on page 134



Make edge grooves on decorative plaques and trays, using our Edge Guide with Contour Finger (3) on page 132



Copy letters and drawings with Rout-A-Form on page 131


Whatever the job... your CRAFTSMAN® Power Tools can do more with the proper Accessories

CRAFTSMAN® Table saws

Capacitor-start, induction-run
motors run quietly with no noisy
gears or brushes to repair or replace

Whatever the job... your
CRAFTSMAN Table Saw can
do more with Accessories
on pages 20 thru 25

YOU CAN DO MORE...

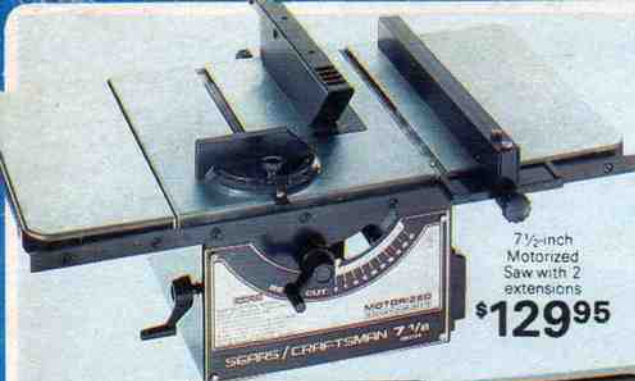

7 1/2-inch
Motorized
Saw with 2
extensions
\$129.95



7 1/2-inch Motorized Saw with
2 extensions and leg set
\$154.95
outfit

7 1/2-inch Motorized Table Saw Outfit. 1/2-HP motor develops 1 HP...

Cuts thru 2x4's at 90° and at 45°

An ideal motorized table saw for on-the-job trimwork, home shop work, and for hobby-type projects.

CUTTING BLADE, CAPACITIES: 7 1/2-inch combination blade cuts wood up to 1 3/4 in. thick at 90° and 45°. Blade and motor tilt for bevel cuts. Bevel scale shows degree of blade tilt. Aluminum miter gauge slides in grooves on either side of blade. Table surface in front of blade at 1-in. cutting depth is 6 1/4 in. Adjustable rip fence positions to right of blade for rips up to 9 1/2 in. wide. Aluminum blade guard. Spreader minimizes blade binding. Anti-kickback pawls.

TABLE: Aluminum. 14x14 inches wide. **EXTENSIONS:** 2 included. Formed aluminum... 6x14 in. each. Attach to sides of saw table for a total surface measuring 14x26 inches. Attaching hardware included.

LEGS: Sturdy steel. Provide approximately 37-in. table height. Rubber padded leveling feet resist creeping, adjust to uneven floors. Sent unassembled.

MOTOR: Capacitor-start, induction-run, 3450-rpm direct-drive 1/2-HP motor develops 1-HP. Perm. lubricated ball bearings.

ELECTRICAL INFO: Pull-on/push-off lockable switch. 120-v., 60-Hz. AC. 880 full-load input watts. 6-ft., 3-wire cord. UL listed.

ORDER INFO: See Warranty page 5. Order caster set (11) on p. 22, goggles on p. 75. 9 HT 24151—Shpg. wt. 54 lbs. \$154.95

Saw above, but without leg set.
9 HT 2415C—Shpg. wt. 32 lbs. \$129.95

**Sears Has a Credit Plan
to Suit Most Every Need**

See Big Book or ask for details

For more information
on CRAFTSMAN®
Stationary Power Tools
and Accessories,
send for
FREE BOOKLET
39 HT 7499



Caster Set for stand
sold below, right

(1 thru 3) 10-inch Motorized Table Saw Outfit

CUTTING BLADE, CAPACITIES: 10-in. combination blade cuts wood up to 2 1/2 in. thick at 90°, 2 5/16 in. thick when tilted to 45°. Blade and motor tilt for bevel cuts. Bevel scale shows degree of blade tilt, has positive stops at 90°, 45°. Aluminum miter gauge slides in grooves on either side of blade. Table surface in front of blade at 1-in. cutting depth is 10 in. Self-aligning rip fence positions to right of blade for rips up to 24 in. wide. Rip scale graduated in 1/16-in. increments. See-thru blade guard. Spreader minimizes blade binding. Anti-kickback pawls reduce kickbacks.

TABLE: Solid cast-aluminum. Measures 17x20 in. **EXTENSIONS:** 2 solid formed steel extensions. 10x20 in. each. Attach to sides of table with hardware incl.

STAND: Stamped steel with rubber-padded leveling feet. Adjusts to uneven floors. Sent unassembled.

MOTOR: Capacitor-start, induction-run, 3450-rpm direct-drive 1-HP motor develops 2-HP. Perm. lubricated

ball bearings. Manual reset overload protector. **ELECTRICAL INFO:** Pull-on/push-off switch with removable locking key. 120-volt, 60-Hertz AC. 1200 full-load input watts. 6-foot, 3-wire cord. UL listed.

ORDER INFO: See Warranty page 5; "N" suffix, p. 82. Order caster set (4) below; goggles on p. 75.

9HT29584N4-(1 thru 3) Outfit. Wt. 110 lbs. \$259.95

9HT2958N-(1) Motorized Saw alone. Wt. 57 lbs. \$199.95

9HT29954-(2) Extension. Wt. 10 lbs. 8 oz. Each \$19.99

9HT22214C-(3) Stand alone. Shpg. wt. 32 lbs. \$39.99

(4) Caster Set. Phenolic plastic wheels in steel frames. 2 1/2-in. swivel front casters, T-handle for height adjustment. 3-in. non-swivel rear casters.

ORDERING INFORMATION:
9 HT 22201—Shipping wt. 6 lbs. 8 oz. Set \$19.99

Combination Dado/Molding Head Insert (not shown). For (1). Use with 7-in. dado; molding head.

ORDERING INFORMATION:
9 HT 29933—Shipping wt. 2 lbs. 2 oz. \$7.49

New at Sears... CRAFTSMAN® Extension Table for table saws and radial saws

Gives you 445.5 square inches of extra work space and provides support for long stock or paneling... legs adjust individually to uneven floors

\$29.99

CONSTRUCTION: Aluminum top resists rust and corrosion. Telescoping, double-channel legs adjust individually to uneven or sloping floors... tighten with wing nuts. Top and legs are angle-braced for additional strength and support. Extension table folds down or you can pull out pin-retainer to remove for storage. Mounts on left or right side of all Craftsman table saws and radial saws... fits most other saws. Attaching

hardware included.
SIZE: Top measures 33x13 1/2 x 1 1/2 inches. Gives you 445.5 square inches of extra work space... provides additional support for cutting and ripping large sheets of paneling and long stock.

ORDERING INFORMATION:
Shipping weight 7 pounds.
9 HT 3279C \$29.99



Extension folds down or can be removed completely when not needed

COMPK SLAEGD **Sears** 3

CRAFTSMAN® Table Saws give you built-in accuracy for miters, bevels, crosscuts, rips . . .

Shop and Compare! These two CRAFTSMAN® Table Saw Outfits give you these 6 features:

- (A) Capacitor-start, induction-run motors are about 20 decibels quieter than universal motors. Plus our motors require no brush or commutator maintenance
- (B) Exclusive Exact-I-Cut indicator shows you where the wood will meet the blade . . . means no trial and error cutting and reduced waste
- (C) Miter gauge is made of cast-aluminum rather than plastic
- (D) Self-aligning, lift-off rip fence locks front and rear with one knob . . . can be conveniently lifted off and replaced at any point
- (E) See-thru blade guard mounts on spreader and stays in raised position for easy blade changing
- (F) Pull-on/push-off switch can be turned off quickly and easily and has built-in, lock-out key to help prevent unauthorized use

*Sears * Best*



For more information on CRAFTSMAN Stationary Power Tools and Accessories, send for FREE BOOKLET 39 HT 7499

Our Best 10-inch Table Saw

Cuts thru wood up to 3 3/4 inches thick

Saw alone **\$269⁹⁵**

Saw with 1-HP motor that develops 2 HP, two extensions and steel stand

Save **\$50.96**

Separate prices total **\$364⁹⁵**

(1 thru 3) Our best 10-inch Table Saw Outfit plus motor.

CUTTING BLADE, CAPACITIES: 10-in. combination blade cuts wood up to 3 3/4 in. thick at 90°, 2 1/4 in. thick at 45°. Blade, motor mount tilt for bevel cuts. Bevel scale shows degree of blade tilt, positive stops at 90°, 45°. Aluminum miter gauge slides in grooves on either side of blade. Table surface in front of blade at 1-in. cutting depth is 15 1/4 in. Self-aligning rip fence positions to right of blade for rips up to 24 in. wide. Rip scale graduated in 1/16-in. increments. See-thru blade guard. Spreader minimizes blade binding. Anti-kickback pawls help reduce kickback. Pull-on/push-off switch with removable locking key, 6-ft., 3-wire cord. Switch has 115-volt receptacle for connecting motor. UL listed.

TABLE: Machine-ground, cast-iron work table. Measures 20x27 inches. Exclusive Exact-I-Cut. EXTENSIONS: Two extensions of heavy 16-gauge formed steel. 10x27 inches each. Attach to either side of table. Attaching hardware included.

STAND: Stamped steel with rubber-padded leveling feet . . . adjust to uneven or sloping floors, resists creeping and marring of floors.

MOTOR: (9 HT 1217C). Capacitor-start, 3450-rpm 1-HP motor with pre-lubricated sleeve bearings develops 2-HP. 4-foot, 3-wire cord.

ELECTRICAL INFORMATION: Runs on 115-volt, 60-Hertz AC. 1250 full load input watts.

ORDER INFO: See Tool Warranty p. 5; Motor Warranty p. 26. Order goggles on p. 75.

9 HT 29916N5—Complete Outfit (1 thru 3) plus Motor. Wt. 229 lbs. **\$364.95**

9 HT 29914N—(1) Saw alone. Shipping weight 146 pounds **269.95**

9 HT 29957C—(2) Extension alone. Shipping weight 15 pounds **19.99**

9 HT 22214C—(3) Stand alone. Shipping weight 32 pounds **39.99**

Combination Dado/Molding Head Insert (not shown). For saw (1) above. For use with 7-inch diameter dado or molding head.

ORDERING INFORMATION:

9 HT 29994—Shipping weight 1 pound 15 ounces **\$7.49**



Power Tool Know How Handbook **\$5⁹⁹**

CRAFTSMAN 3-piece Kromedge® Blade Pack

Save **15%** over regular each price

Sep. prices total **\$16.97 \$14⁴²**



CRAFTSMAN Multi-purpose Jig **\$6⁹⁹**

(4) **Power Tool Know How Handbook.** Contains instructions for over 600 woodworking operations, including those at top of facing page. Features section on the operation of table saws. Also sections on band saws, drill presses, wood lathes, shapers, stationary sanders and planers, motorized miter boxes and tool sharpening. Black and white illustrations. 207 pages.

ORDER INFO: Wt. 14 oz. 9 HT 2918 **\$5.99**

(5) **CRAFTSMAN® 3-piece Kromedge® Blade Pack**

CONSTR.: Made of chrome-nickel-molybdenum steel . . . fortified with chromium.

BLADES: 10-in. Master Combination Blade (9 HT 32498) for miters, crosscuts in hard or soft woods and rips in all dry wood, furniture stock; 10-in. Chisel-tooth Combination Blade (9 HT 32668) for all-purpose crosscutting in Celotex® fiberboard, woods or veneers.

ORDER INFO: See complete description of blades and other 3-piece Blade Packs at 15% savings on page 24.

Shpg. wt. 5 lbs. 5 oz. 9 HT 32352 **\$14.42**

(6) **CRAFTSMAN® Multi-purpose Jig**

CONSTRUCTION: High-impact plastic. Fits over fence of all table saws.

USES: For tenon joints and regular cuts . . . can be used with materials almost as thick as rip capacity. Measures height of wood or blade in 1/4-inch increments. Has 45° slot for checking blade tilt at that angle. Attach wood (not included) on side for mortises and tenons.

ORDER INFO: Wt. 5 lbs. 6 oz. 9 HT 32778 **\$6.99**

versatility for special jobs

FULL ONE YEAR WARRANTY ON

CRAFTSMAN STATIONARY POWER TOOLS

If within one year from the date of purchase, any Craftsman Stationary Power Tool fails due to a defect in material or workmanship, Sears will repair it, free of charge. Warranty service is available by simply contacting the nearest Sears store or Service Center throughout the U. S. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

12-inch Motorized Table Saw with two extensions and steel legs

Cuts thru wood up to $3\frac{3}{16}$ inches thick. 2-HP motor develops $3\frac{1}{2}$ HP

Complete outfit **\$469⁹⁵**

YOU CAN DO MORE...

Disc-sand work pieces, sand cuts with sanding wheels and discs on p. 21

Duplicate taper ripping . . . order taper jig accessory keyed (6) on page 20

Tenon cuts for joining wood . . . order universal jig (2) on page 20

Spline cuts . . . order universal jig (2) on page 20

Order dado sets on p. 23

Whatever the job . . . your CRAFTSMAN® Table Saw can do more with Accessories on pages 20 thru 25



For more information on CRAFTSMAN® Stationary Power Tools and Accessories, send for **FREE BOOKLET 39 HT 7499**

CUTTING BLADE, CAPACITIES: 12-inch Kromedge® blade cuts thru wood up to $3\frac{3}{16}$ inches thick at 90° and $2\frac{3}{4}$ inches thick when tilted to 45°. Blade and motor tilt for bevel cuts. Bevel scale shows degree of blade tilt, has positive stops at 90° and 45°. Aluminum miter gauge slides in grooves on either side of blade. Table surface in front of blade at 1-inch cutting depth is 16 inches. Self-aligning rip fence positions to right of blade for rips up to 24 inches wide. Rip scale graduated in $\frac{1}{16}$ -inch increments. See-thru blade guard. Spreader helps to prevent blade binding in wood. Anti-kickback pawls help reduce chance of wood kicking back.

TABLE: Machine-ground, cast-iron work table. Measures 20x27 inches. Exclusive Exact-I-Cut shows you where wood will meet the blade when crosscutting, ripping, molding and dadoing.

EXTENSIONS: Two 16-gauge formed steel extensions, each 10x27 inches. Attach to both sides of table for a total work surface area of 40x27 in. Attaching hardware included.

LEGS: Sturdy steel. Positions saw table at proper working height. Rubber-padded leveling feet resist creeping during use, adjust to uneven or sloping floors. Sent unassembled.

MOTOR: Built-in capacitor-start, 3450-rpm 2-HP motor develops $3\frac{1}{2}$ HP. Permanently lubricated ball bearings. Manual reset overload protector helps guard against burnouts.

ELECTRICAL INFORMATION: Pull-on/push-off switch with removable locking key, 6-foot, 3-wire cord. UL listed. 240-volt, 60-Hertz AC. 1650 full load input watts.

ORDERING INFORMATION: See Full One-Year Warranty above. Order goggles on page 75. Order casters keyed (11) on page 22 for legs.

9 HT 2418N—Shipping weight 226 pounds \$469.95

Combination Dado/Molding Head Insert (not shown). For 12-inch table saw above. For use with 7-inch diameter dado or molding head sets.

ORDERING INFORMATION: 9 HT 29995—Shipping weight 1 pound 10 ounces \$7.49

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details



Save \$138.85 to \$285.73

If you own a table or radial saw, buy 1 of these 2 workshops



**3-pc. Shop with
Jointer-Planer, Band
Saw-Sander, Drill Press**

Separate prices \$879⁰⁰
total \$1,031.80

WORKSHOP INCLUDES:

6½-in. Jointer-Planer Outfit (9HT2068N3) described on p. 16. Incl. Jointer-Planer (9HT2068N), Motor (9HT1216C), Stand (9HT22216N).

12-in. Band Saw-Sander Outfit (9HT24351N3) described on p. 11. Incl. Band Saw-Sander (9HT2435N), Motor (9HT1255C), Legs (9HT22236C).

15½-in. Drill Press Outfit (9HT21371N2) described on page 14. Includes Drill Press (9HT2137N), Motor (9HT1255C).

ORDER INFO: See tool Warranty on page 5 and motor Warranty on page 26. Order safety goggles on page 75. Wt. 506 lbs.
9 HT 1021N8\$879.00



**4-tool Shop with Jointer-
Planer, Band Saw-Sander,
Drill Press, Belt-Disc Sander**

Separate prices \$999⁰⁰
total \$1,284.73

WORKSHOP INCLUDES:

6½-in. Jointer-Planer Outfit (9HT2068N3) described on p. 16. Includes Jointer-Planer (9HT2068N), Motor (9HT1216C), Stand (9HT22216N).

12-in. Band Saw Sander Outfit (9HT24351N3) described on p. 11. Includes Band Saw-Sander (9HT2435N), Motor (9HT1255C), Legs (9HT22236C).

15½-in. Drill Press Outfit (9HT21371N2) on p. 14. Drill Press (9HT2137N), Motor (9HT1255C).

Belt-Disc Sander Outfit (9HT22525N3) on p. 13. With Belt-Disc Sander (9HT2252N), Motor (9HT1216C), Stand (9HT22213C).

ORDER INFO: Tool Warranty p. 5, motor Warranty p. 26, goggles p. 75. Shpg. wt. 637 lbs.
9 HT 1013N9\$999.00

**Sears Has a
Credit Plan
to Suit Most
Every Need**

See Big Book
or ask
for details



when you buy a CRAFTSMAN® Power Tool WORKSHOP

(1) 2-tool Workshop

WORKSHOPS INCLUDE:

6½-in. Jointer-Planer Outfit (9HT20686N3) on p. 16. With Jointer-Planer (9HT2068N), Motor (9HT1216C), Stand (9HT22216N).

ORDER INFO: See tool Warranty on page 5, motor Warranty on p. 26. Order goggles on p. 75.

With 10-in. Table Saw Outfit (9HT29916N4) on p. 4. With Saw (9HT29914N), 2 Extensions (9HT29957C), Motor (9HT1217C), Stand (9HT22214C).

9 HT 1016N8—Wt. 407 lbs. \$629.00

With 10-inch Radial Saw Outfit (9HT23123N4) described on p. 8. Includes Radial Saw (9HT2311N), Stand (9HT22205L), Worklight (9HT2480), Caster Set (9HT22201).

9 HT 1014N7—Wt. 410 lbs. \$599.00

(2) 4-tool Workshop

WORKSHOPS INCLUDE:

6½-inch Jointer-Planer Outfit (9HT20686N3) described on p. 16. Includes Jointer-Planer (9HT2068N), Motor (9HT1216C), Stand (9HT22216N).

12-in. Band Saw-Sander Outfit (9HT24351N3) described on p. 11. Includes Band Saw-Sander (9HT2435N), Motor (9HT1255C), Legs (9HT22236C).

16-gallon Home-N-Shop Vac (9HT1787L) described on page 40.

ORDER INFO: See tool Warranty on page 5, motor Warranty on p. 26. Order goggles on p. 75.

With 10-in. Table Saw Outfit (9HT29916N4) on p. 4. With Saw (9HT29914N), 2 Extensions (9HT29957C), Motor (9HT1217C), Stand (9HT22214C).

9 HT 1017N9—Wt. 568 lbs. \$999.00

With 10-in. Radial Saw Outfit (9HT23123N4) described on p. 8. Includes Radial Saw (9HT2311N), Stand (9HT22205L), Worklight (9HT2480), Caster Set (9HT22201).

9 HT 1018N9—Wt. 571 lbs. \$999.00

(3) 5-tool Workshop

WORKSHOPS INCLUDE:

6½-in. Jointer-Planer Outfit (9HT20686N3) described on p. 16. Includes Jointer-Planer (9HT2068N), Motor (9HT1216C), Stand (9HT22216N).

12-in. Band Saw-Sander Outfit (9HT24351N3) described on p. 11. Includes Band Saw-Sander (9HT2435N), Motor (9HT1255C), Legs (9HT22236C).

15½-in. Drill Press Outfit (9HT21371N2) described on p. 14. Includes Drill Press (9HT2137N), Motor (9HT1255C).

16-gal. Home-N-Shop Vac (9HT1787L), p. 40.

ORD. INFO: See tool Warranty p. 5, motor Warranty p. 26, goggles p. 75.

With 10-in. Table Saw Outfit (9HT29916N4) on p. 4. With Saw (9HT29914N), 2 Extensions (9HT29957C), Motor (9HT1217C), Stand (9HT22214C). Wt. 770 lbs. 9HT1012N9. \$1299.00

With 10-in. Radial Saw Outfit (9HT23123N4) on p. 8. With Radial Saw (9HT2311N), Stand (9HT22205L), Worklight (9HT2480), Casters (9HT22201). Wt. 773 lbs. 9HT1011N9. \$1299.00

If you do not own a power saw, choose one of these 3 WORKSHOPS with your choice of a Table Saw or Radial Saw



2-tool Shop with Jointer-Planer



1

Sep. prices total

\$788.84

with Table Saw,

Sep. prices total

\$737.85

with Radial Saw

\$599.00

with Radial Saw



5-tool Shop with Jointer-Planer, Vac. Band Saw-Sander and Drill Press

Sep. prices total

\$1,561.71

with Table Saw,

Sep. prices total

\$1,510.72

with Radial Saw

\$1299.00

4-tool Shop with Jointer-Planer, Vac. Band Saw-Sander



2

Sep. prices total

\$1,218.77

with Table Saw,

Sep. prices total

\$1,167.78

with Radial Saw

\$999.00



3

10-inch Radial Saw with 1-HP motor that develops 2 HP

Cuts thru wood up to 3 inches thick at 90°, crosscuts up to 13 1/2 inches wide in 3/4-inch stock. Rear-mounted controls



Saw alone
\$199.95

Save \$9.99

Saw with steel stand

Separate prices
total **\$249.94** **\$239.95**

10-inch Radial Saw with 1-HP motor that develops 2 HP

Cuts thru wood up to 3 inches thick at 90°, crosscuts up to 15 inches wide in 3/4-inch stock. Up-front controls for ease of operation



Save \$39.97

Saw with stand, worklight and casters

Separate prices
total **\$364.92** **\$324.95**

10-inch Radial Saw alone

MOTOR: Capacitor-start, 3450-rpm 1-HP motor develops 2 HP . . . with manual blade brake. Double-end shaft with 3/8-inch arbor and 1/2-20 threaded end for mounting accessories.

CUTTING BLADE, CAPACITIES: 10-inch Kromedge® blade. Rear-mounted depth of cut and miter controls. Blade and motor swivel for 25-inch rip capacity. Crosscuts up to 13 1/2 inches wide in 3/4-inch stock. Maximum depth of cut is 3 inches at 90° and 2 1/4 inches at 45°. Fixed miter stops at center, 45° right or left; fixed bevel stops at vertical, 45° and horizontal. Blade guard with spreader helps check blade binding. Anti-kickback pawls help reduce kickbacks.

CONSTRUCTION: Motor and carriage glide along replaceable steel trackways on sealed ball bearings. Cast-aluminum arm and column support, cast-iron column. Chipboard work table resists wear and warping . . . measures 26x37 1/2x3/4 inch thick.

ELECTRICAL INFORMATION: Pull-on/push-off switch with removable locking key helps prevent unauthorized use. Runs on 120-volt, 60-Hertz AC. 1200 full load input watts. 6-foot, 3-wire cord. UL listed.

ORDER INFO: See Warranty on page 5. Order goggles on page 75. Accepts 7-inch diameter, 1 1/8-inch width dado (not included) on page 23.

9 HT 2316N—Shipping weight 105 pounds . . . **\$199.95**

10-inch Radial Saw with Steel Cabinet Stand

Includes saw described above plus heavy-gauge steel stand (9 HT 22205L) keyed (2) on page 22. Measures 24x25x32 3/8 inches high. Leg levelers adjust to uneven floors. Baked charcoal gray enamel finish.

ORDERING INFORMATION: Stand sent unassembled. Order optional stand accessories on page 10.

9 HT 23164N2—Shipping weight 157 pounds . . . **\$239.95**

10-inch Radial Saw alone

MOTOR: Capacitor-start, 3450-rpm 1-HP motor develops 2 HP. Direct-drive, induction-run for quiet, low-maintenance operation. Manual blade brake. Double-end shaft with 3/8-inch arbor and 1/2-20 threaded end for mounting accessories.

CUTTING BLADE, CAPACITIES: 10-inch Kromedge® blade. Depth of cut, bevel and miter controls mounted up front for quicker and easier set-ups than saws with rear-mounted controls. Blade and motor swivel for 25-inch rip capacity. Crosscuts up to 15 inches wide in 3/4-inch stock. Maximum depth of cut is 3 inches at 90° and 2 1/4 inches at 45°. Fixed miter stops at center, 45° right or left; fixed bevel stops at vertical, 45° and horizontal. Blade guard with spreader helps check blade binding. Anti-kickback pawls help reduce kickbacks.

CONSTRUCTION: Motor and carriage glide along replaceable steel trackways on sealed ball bearings. Cast-iron arm, column and column support. Chipboard work table resists wear and warping . . . measures 26x37 1/2x3/4 inch thick.

ELECTRICAL INFORMATION: Pull-on/push-off switch with removable locking key helps prevent unauthorized use. Runs on 120-volt, 60-Hertz AC. 1200 full load input watts. 6-foot, 3-wire cord. UL listed.

ORDERING INFORMATION: See Full One Year Warranty on page 5. Order safety goggles on page 75. Accepts 7-inch diameter, 1 1/8-inch width dado (not included) . . . order separately on page 23.

9 HT 2311N—Shipping weight 170 pounds . . . **\$279.95**

10-inch Radial Saw with Steel Cabinet Stand, Worklight and Casters

Includes 10-inch radial saw described above plus the following accessories. Heavy-gauge steel cabinet stand (9 HT 22205L) . . . measures 24x25x32 3/8 inches high. Leg levelers adjust to uneven or sloping floors. Cabinet has baked charcoal gray enamel finish. Worklight (9 HT 2480) with 18-inch flexible neck. Set of 4 casters (9 HT 22201).

ORDER INFO: Stand sent unassembled. Order stand accessories on p. 10.

9 HT 23123N4—Shipping weight 232 pounds . . . **\$324.95**



\$9.99

Hold-down Attachment for radial saws holds square or round stock



\$4.99

Stop-length Gauge for radial saws

Exclusive at Sears. Remove a few screws from your radial saw work table. Install hooks into existing holes. To use, simply catch foot of clamp in one of the hooks, position clamp over work and tighten . . . square or round stock is held firmly. Includes clamps, hooks.

ORDERING INFORMATION:

For radial saws only.
Shipping weight 1 lb. 7 oz.
9 HT 29502 . . . **\$9.99**

Exclusive at Sears. For repetitive cuts. Attach permanent clamps to ends of radial saw table. Insert 3/4-in. dowel rod (not incl.) thru permanent clamp and bottom of adjustable . . . tighten. Slip second dowel (not incl.) thru top of adjustable clamp, set to desired width and tighten. To use, butt workpiece against dowel. With 1 adjustable, 2 permanent clamps.

ORDERING INFO: For radial saws only. Wt. 1 lb. 2 oz.
9 HT 3242 . . . **\$4.99**



CRAFTSMAN® Kromedge® 3-blade pack

Save 15% over regular each price
\$14.42

CONSTRUCTION: Chrome-nickel-molybdenum steel . . . fortified with chromium. BLADES: One 10-in. Master Combination Blade (9 HT 32498) for miters, crosscuts in hard or soft woods and rips in all dry wood; one 10-in. Chisel-tooth Combination Blade (9 HT 32668) for all-purpose crosscuts, miters, rips in hard or soft wood; one 10-in. Crosscut Plywood Blade (9 HT 32446) for all-purpose crosscuts in Celotex® fiberboard, woods.

ORDER INFO: See blade details, p. 24. Separate prices total \$16.97.
9 HT 32352—Wt. 5 lbs. 5 oz. . . **\$14.42**



Our best CRAFTSMAN® Tungsten Carbide-tipped Blade with 72-teeth for satin-like cuts

Plywood cut with regular Kromedge® blade
Plywood cut with our best carbide-tipped 72-tooth blade

More teeth and alternately beveled, triple-ground tips provide smoothest cuts of any blade we offer. Produces standard kerf for thick but brittle materials.

CONSTRUCTION: Kromedge® blade body, tungsten-carbide tips. Expansion slots guard against warping.

USES: Rips, crosscuts, miters, bevels. Fits 3/4-in. or 5/8-in. arbors. Maximum cutting depth 1 1/4 in. Maximum rpm 4200. Not for ferrous metals or masonry.

ORDER INFO: For 10-in. or larger radial saws, table saws. Wt. 2 lbs. 2 oz.
9 HT 32556 . . . **\$49.99**

and do much more . . .

Shop and Compare! Buy any CRAFTSMAN® Radial Saw and get these 6 features:

- Capacitor-start, induction-run Motors are about 20 decibels quieter than universal motors. Plus our motors require no brush or commutator maintenance and there are no meshed gears to drain power
- Spreader helps reduce binding of blade
- Anti-kickback pawls help reduce chance of workpiece kicking back at operator
- Replaceable steel trackways so you will never have to replace entire arm due to wear from carriage bearings . . . simply replace steel tracks
- Center table leveling screw helps keep table level at all points
- Pull-on/push-off Switch can be turned off quickly and easily and has built-in, lock-out key to help prevent unauthorized use

YOU CAN DO MORE...

Dado cuts for making box joints, lattices . . . order dado on p. 23

Make decorative edges with molding heads and bits on page 23

Rout with adapter (9 HT 3239) on p. 20, 134

Rout with router bits on p. 133, 134

Drum sand with sanding drum (13) sold on page 20

Plane with rotary surface planer (19) on page 21

Whatever the job . . . your CRAFTSMAN® Radial Saw can do more with Accessories on pages 20 thru 25

Our Best 10-inch Radial Saw

1.5-HP motor develops 2½-HP . . . cuts thru wood up to 3 in. thick at 90°, crosscuts up to 15 in. wide in ¾-inch stock. Up-front, single control lever for miter arm releasing, indexing and locking plus our easiest-to-read scales

Saw alone
\$359⁹⁵

Save \$37.96

Saw with light, stand, locking front panel, drawers and casters

\$449⁹⁵

Outfit



For more information on CRAFTSMAN® Bench Power Tools and Accessories, send for FREE BOOKLET 39 HT 7499

Sears ★ Best

Our best 10-inch Radial Saw alone

These improved features make this 10-inch radial saw our best: Single control lever for miter arm releasing, indexing and locking is mounted up-front for convenient, easy set-ups. Our largest, easiest-to-read miter and bevel scales with staggered degree lines for quick, accurate settings. Bevel index pin with quick cam-action design . . . simply flip lever for bevel indexing. Our largest operating handle for more comfort and control. Quick-action, bevel-lock lever . . . pull for release, push to lock. Yoke index lever with quick, cam-action . . . simply pull to release pin for positive indexing. Two-piece column support has simplified adjustment for wear. Each turn of up-front depth control raises or lowers blade 1/16-inch for precise adjustments.

MOTOR: Capacitor-start, 3450-rpm, 1.5-HP motor develops 2½-HP. Direct-drive, induction-run for quiet, low-maintenance operation. Automatic blade brake. Thermal overload protector. Double-end shaft with 5/8-inch arbor and 1/2-20 threaded end for mounting accessories.

CUTTING BLADE CAPACITIES: 10-in. Kromedge® blade. Depth of cut, bevel and miter controls mounted up front. Blade and motor swivel for 26-in. rip capacity. Crosscuts up to 15 in. wide in ¾-in. stock. Maximum depth of cut is 3 in. at 90°, 2¼ in. at 45°. Fixed miter stops at center, 45° right or left; fixed bevel stops at vertical, 45° and horizontal. Blade guard with spreader. Anti-kickback pawls.

CONSTRUCTION: Motor and carriage glide along replaceable steel trackways on sealed ball bearings. Cast-aluminum arm, column support; ground steel column. Chipboard table resists wear, warping . . . measures 27½x40x1 inch thick.

ELEC. INFO: Pull-on/push-off switch with removable locking key. Factory-wired for 120-v., 60-Hz. AC . . . change quick-connect terminals and replace plug with 240-v. type to use 240-v. 1050 full load input watts. 6-ft., 3-wire cord. UL listed.

ORDER INFO: See Warranty on p. 5. Order goggles on p. 75. Accepts 7 or 8-in. diam., 1½-in. width dado (not incl.). 9 HT 1977N—Shipping weight 150 pounds . . . \$359.95

Our best 10-in Radial Saw with light, stand, locking front panel, 3 drawers and casters.

Includes saw at left plus the following accessories. Heavy-gauge steel cabinet stand (9 HT 22205). Locking front panel (9 HT 10335). 3 drawers (9 HT 10326). Set of 4 casters (9 HT 22201) for added mobility. Worklight (9 HT 2480) with 18-inch flexible neck.

ORDER INFO: Stand sent unassembled. Sep. prices total \$487.91. Shipping weight 249 pounds. 9 HT 19776N8 . . . \$449.95

CRAFTSMAN® 12-inch Radial Saw


Gives you more power, larger work table and deeper cut than any other CRAFTSMAN® radial saw we offer

Whatever the job... your CRAFTSMAN® Radial Saw can do more with Accessories on pages 20 thru 25

YOU CAN DO MORE...

For more information on CRAFTSMAN Stationary Power Tools and Accessories, send for FREE BOOKLET 39 HT 7499

1

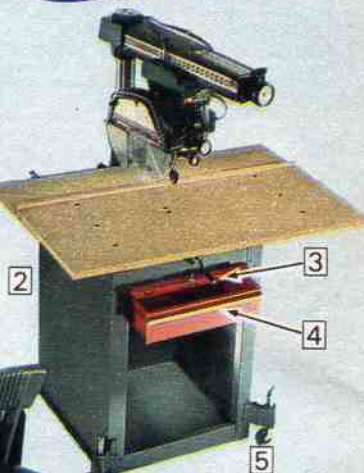

2-HP motor develops 3½ HP. Crosscuts up to 16½ inches wide in ¾-inch stock. Up-front controls for fast set-ups, automatic blade brake, 29x44x1 inch table

Saw alone **\$469⁹⁵**

(1) 12-inch Radial Saw alone

MOTOR: Capacitor-start, 3450-rpm 2-HP motor develops 3½ HP. Direct-drive, induction-run for quiet, low-maintenance operation. Automatic blade brake. Thermal overload protector. Double-end shaft, ¾-in. arbor, ½-20 threaded accessory end.

CUTTING BLADE, CAPACITIES: 12-inch Kromedge® blade. Retractable lower blade guard. Depth of cut, bevel and miter controls mounted up front for fast set-ups. Blade and motor swivel for 26½-inch rip capacity. Crosscuts up to 16½ inches wide in ¾-inch stock. Maximum depth of cut 4 inches at 90°, 2½ inches at 45°. Fixed miter stops at center, 45° right or left; fixed bevel stops at vertical, 45° and horizontal. Blade guard with spreader helps check blade binding. Anti-kickback pawls help reduce chance of wood kicking back.

CONSTRUCTION: Motor and carriage glide along replaceable steel trackways on sealed ball bearings... no need to replace entire arm due to wear from carriage bearings, simply replace trackways. Cast-iron arm, column and column support. Chipboard work table resists wear and warping... measures 29x44x1 inch thick.

ELECTRICAL INFO: Pull-on/push-off switch with removable locking key helps prevent unauthorized use. Runs on 240-v., 60-Hz. AC. 1650 full-load input watts, 6-foot, 3-wire cord. UL listed.

ORDERING INFO: See Full One Year Warranty on page 5. Order safety goggles on page 75. Accepts 8-inch diameter, 1½-inch width dado (not included)... order separately on page 23. Shpg. wt. 218 lbs.
9 HT 2330N\$469.95

(2) Stand for radial saw

Steel... provides support. 24x25x32½ in. high. Rubber-padded leveling feet resist creeping, adjust to uneven floors. Baked charcoal gray enamel finish. Sent unassembled. ORDER INFO: Order optional stand components (3 thru 5) separately. Wt. 57 lbs.
9 HT 22205L\$49.99

(3) Locking Panel for stand (2)

Steel with red enamel finish. Slides inside of stand when open, covers front of stand when closed. Lock and 2 keys. ORDER INFO: Wt. 11 lbs.
9 HT 10335C\$11.49

(4) Drawer for stand (2)

Heavy-gauge steel with red enamel finish. Glides smoothly on compound-action steel slides. Measures 16½x15¼x4½ inches deep. ORDER INFO: Wt. 9 lbs.
9 HT 10326\$10.50

(5) Caster Set for stand (2)

Outside-mount. 2½-inch diameter front casters swivel... have T-handle for raising and lowering; rear 3-inch diameter casters are non-swivel. Plastic wheels in steel frame. ORDER INFO: Set of 4. Shipping wt. 6 lbs. 8 oz.
9 HT 22201Set \$19.99

CRAFTSMAN® Extension Table for radial and table saws

Gives you 44.5 square inches of extra work space for long stock or paneling

\$29⁹⁹

CONSTRUCTION: Aluminum top resists rust. Telescoping, double-channel legs adjust to uneven floors. Angle-braced for strength. Folds down or removes for storage. Top measures 33x13½ inches wide.

ORDERING INFO: See complete description on page 3.
9 HT 32779C—Shipping weight 7 pounds\$29.99

Pack of 3, 12-in. steel CRAFTSMAN® Kromedge® Blades

Save 15% over regular each price

Separate prices total \$25.97 **\$22⁰⁷**

Includes 1 blade each: Master Combination (9 HT 32499); Chisel-tooth Combination (9 HT 32702); Crosscut Plywood (9 HT 32451).

ORDER INFO: See details of blades on page 24. Wt. 9 lbs. 1 oz.
9 HT 32351Pkg. \$22.07

CRAFTSMAN® 12-inch Band Saw-Sander

Cuts free-form or straight lines in wood up to 6 inches thick and 12 inches wide... makes all the cuts at right and then sands them smooth; gets into even hard-to-reach crevices

- Exclusive built-in light illuminates work area
- Cast-metal table tilts from horizontal to 45° for bevel cuts
- Also ideal for cutting materials such as insulation, cardboard, plastic, plastic foam, vinyl and asbestos tile

Save \$25⁹⁸

Separate prices
total \$315.93

\$289⁹⁵

Band Saw-Sander
with Motor, Legs

(1) **Band Saw-Sander alone.** Overall size: 38x26x14½ inches deep.

USES: Ideal for general-purpose sawing plus cutting of intricate shapes like table legs. Cuts stacks of wood for duplicating patterns. Also cuts plastic laminate, floor tile and more. Cuts metal with speed reducer, blades sold below. Replace blade with sanding belt for fine finishing. Attach Vacs (p. 40) to dust chute for sawdust pick-up. DRIVE MECHANISM: Balanced, 12¼-in. drive and idler wheels revolve on permanently lubricated ball bearings. Knob quickly adjusts blade tension. Blade guides above and below table promote accurate cuts.

WORK TABLE: Cast-metal construction... 14x12½ inches. Tilts 45° for bevel cuts. Has ¾x½-in. groove for miter gauge (3) sold separately below.

CUTTING CAPACITY: Cuts wood up to 6 inches thick, 12 inches wide.

ACCESSORIES: Includes ¼x80-inch skip-tooth blade, ½x80-inch sanding belt (order extra blades and belts below), sanding platen, machine and motor pulleys, belt, belt-pulley guard. Pull-on/push-off switch with removable locking key and receptacle for connecting 115-volt motor.

ORDERING INFORMATION: See Warranty on page 5, goggles p. 75. UL listed.

9 HT 2435N—Shipping weight 78 pounds\$229.95

Band Saw-Sander above with Motor and Legs.

CAPACITOR-START ½-HP MOTOR: (9 HT 1255) 1725 rpm. 115-v., 60-Hz. AC. 660 full-load input watts. Four-foot, 3-wire cord.

STEEL LEGS: With adjustable leveling feet, rubber pads. Sent unassembled.

ORDERING INFO: See Saw Warranty page 5, Motor Warranty page 26.

9 HT 2435 1N3—Shipping weight 126 pounds\$289.95

(2) **Band Saw Rip Fence.** Helps increase accuracy. For ripping evenly at predetermined widths. Locks at front. Includes fittings. Tilts to 45°, positive stop.

ORDERING INFORMATION:

9 HT 23432—Shipping weight 4 pounds 2 ounces\$19.50

(3) **Miter Gauge.** For saw above, most other saws with ¾x¾-inch deep miter slots. Locks at any angle from 0° to 90° right or left. Positive stops at 0° and 45° left or right. ORDER INFO: Use with stop rods (5) and hold-down clamp (3) on p. 20.

9 HT 29929—Shipping weight 3 pounds 2 ounces\$15.99

(4) **Replacement Sanding Belts** for band saw-sander above

Each measures 80x½-inch wide. Medium-fine surface.

ORDERING INFORMATION: Package of 5.

9 HT 2236 1—Shipping weight 9 ouncesPackage \$2.99

(5 and 6) **Replacement Blades** for band saws

CONSTRUCTION: Alloy steel is heat-treated and hardened for long wear and sharpness. Precision-ground for cutting accuracy. Each blade tension-tested for strength. Endless blades fit most band saws.

SIZES, USES, ORDER INFO: Steel cutting blades should be used only when band saw operates with speed reducer (7).

Catalog Number	For sawing	Width inches	Length inches	Teeth per in.	Wt. oz.	Each for	5 for
----------------	------------	--------------	---------------	---------------	---------	----------	-------

(5) **Regular-tooth Blades.**

9HT26582	Wood, hardboard, plywood, chipboard*	¾	54	15	4	\$2.49	\$11.99
9HT26641	Wood	¾	62	6	5	2.99	14.20
9HT26642	Wood	¾	62	6	5	2.99	14.20
9HT26572	Wood*	¾	78	6	6	2.99	14.20
9HT26232	Wood	¾	80	6	6	2.99	14.20
9HT26233	Wood	¾	80	6	7	2.99	14.20
9HT26234	Wood	¾	80	6	8	2.99	14.20
9HT26592	Plywood	¾	80	15	4	2.99	14.20
9HT26593	Plywood	¾	80	15	6	2.99	14.20
9HT2624	Brass, non-ferrous metals	¾	80	10	6	3.49	16.80

Steel-cutting Blades.

9HT26255	Steel	¾	54	24	4	\$3.49	\$16.80
9HT2625	Steel	¾	80	14	6	4.99	23.70

(6) **Skip-tooth Blades.** For extra-fast wood cutting.

9HT26595	Wood	¾	80	4	5	\$2.99	\$14.20
9HT26596	Wood	¾	80	4	7	2.99	14.20
9HT26597	Wood	¾	80	4	8	2.99	14.20


*Fine-tooth for minimum splintering, smooth finish.

(7) **Speed Reducer**... allows use of metal-cutting blades **\$79⁹⁵**


Reduces band saw blade speed to approximately 135 feet per minute... 21.5 to 1 reduction. Allows use of metal-cutting blades to cut non-ferrous metals, brass, steel. Steel construction; for use with 1725 rpm motor only (not included)... motor mounts on reducer. May be changed from reduced speed to normal quickly. Includes mounting bracket, adjusting rod. Fits most Craftsman 12-inch band saws and saw (1) above. Use with legs (9 HT 22236), part of set above or sold separately on page 22, or stand (9 HT 22213) sold on page 22.

ORDERING INFORMATION:

9 HT 23896—Shipping weight 14 pounds 6 ounces\$79.95

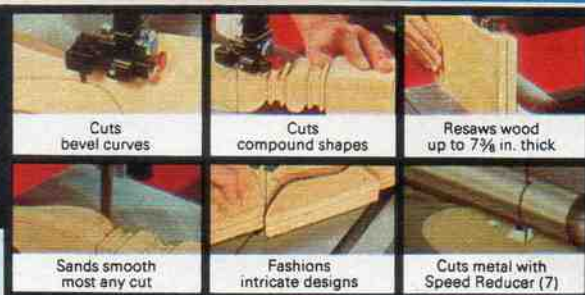

For more information on CRAFTSMAN® Bench Power Tools, and Accessories, send for FREE BOOKLET 39 HT 7499

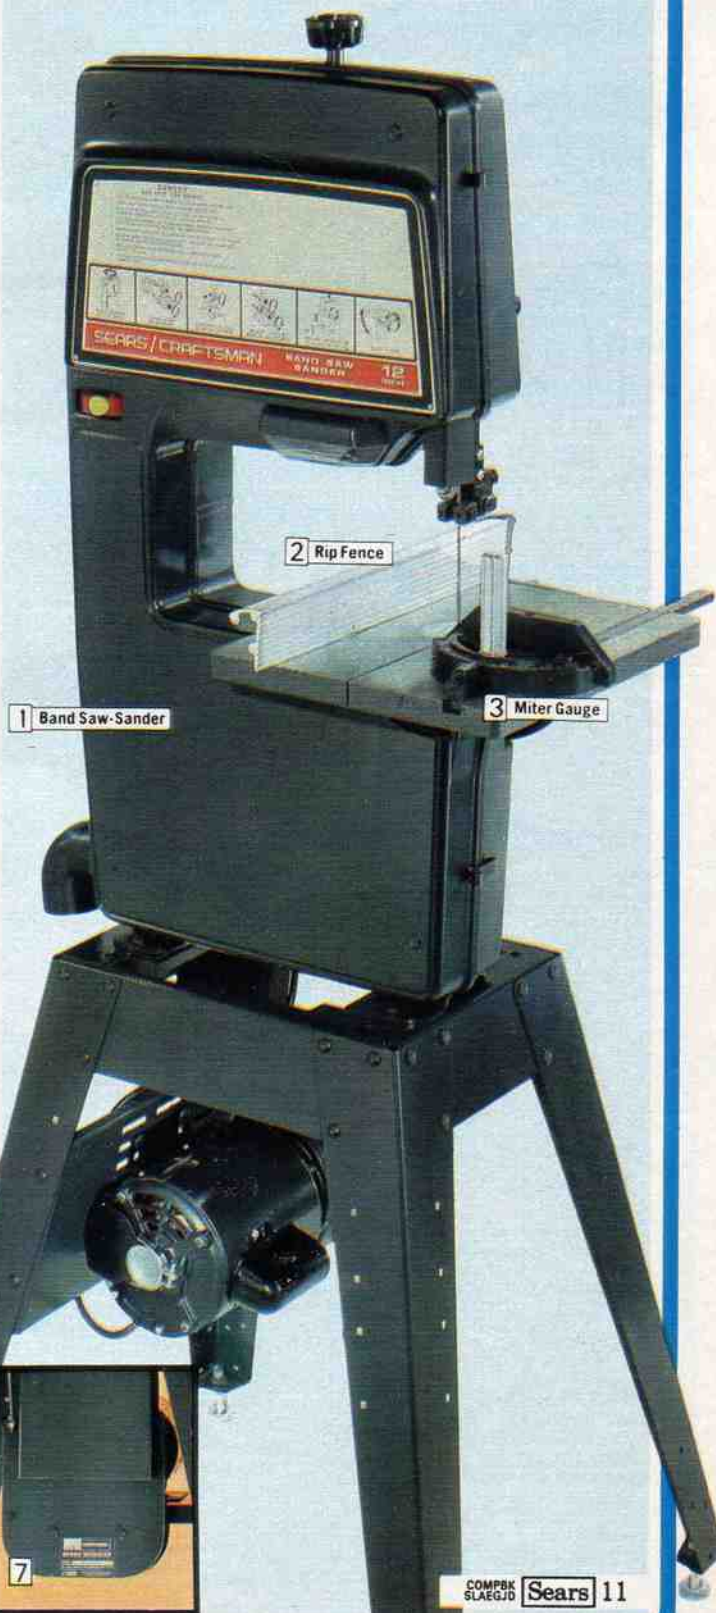

CRAFTSMAN® 12-inch Lathe

Have fun and enjoy the satisfaction of transforming rough stock into something useful and beautiful

Can handle stock 12-in. in diam., 37 inches long.

For more information on CRAFTSMAN Bench Power Tools and Accessories, send for FREE BOOKLET 39 HT 7499.

You can do projects like these



Shape attractive wooden planters and bowls, plain or fancy discs and rims



Indexing feature lets you determine equal spacing as on this ship's wheel



Turn plastics and soft metals. You can do small turning projects like this



With additional accessories, lathe can perform such jobs as sanding, drilling, buffing

12-in. Tool Rest (mounted on Lathe) and 6-in. Tool Rest are included



Lathe complete with motor and workbench

\$234.95

Lathe with Motor and Workbench. MOTOR: Capacitor-start, 1/2-HP, 1725 rpm motor (9 HT 1255C). Sleeve bearings. 4-step machine, motor pulleys for speeds of 875, 1350, 2250, 3450 rpm.

CAPACITY, CONTROLS: Turning capacity of 12-in. diameter over bed, 8-in. diam. over tool rest, 37-in. between centers. Hinged belt guard eases speed changes... side-mounted chart helps you select proper speed for the job. Up front hand levers let you lock tool rest, tool rest base, tail stock, and ram in position. Tail stock slides along bed, hand wheel advances ram up to 1 3/4-in. Index pin in head stock for settings to 36 equal spacings.

LATHE CONSTRUCTION: 19 1/2 x 12 x 54 1/2-in. long. Cast-iron head, tailstock have #1 Morse taper. Steel tubing bed 4 1/2-in. long; 2 1/4-in. diameter. Spindle turns on permanently lubricated ball bearings. Has 3/4-16 threaded spindle.

WORKBENCH CONST: Legs and braces of 16-gauge steel. Flakeboard top 24 x 60 x 1-in. thick. Stands 32 1/2 inches high. Baked gray finish.

12 Sears

ACCESSORIES: Includes 4-step machine and motor pulleys, V-belt, 6 and 12-in. tools tool rests, spur and cup centers (No. 1 Morse taper) and operating instructions. Order additional accessories at right.

ELECTRICAL INFORMATION: Lathe has pull-on/push-off switch with key; 6-ft., 3-wire cord; Motor runs on 115-v., 60-Hz., AC; 660 full-load input watts; 4-ft., 3-wire cord. Motor plugs into receptacle on lathe switch.

ORDER INFO: Save \$20.98. Sep. prices total \$255.93. Workbench sent unassembled. See full one-year warranty for lathe on page 5. See full one-year warranty for motor on page 26. Order goggles p. 75.

9 HT 23813N3—Wt. 170 lbs. \$234.95

Lathe with Motor. As above but without workbench.

ORDERING INFORMATION: Save \$12.99. Sep. prices total \$212.94.

9 HT 23805N2—Wt. 101 lbs. \$199.95

Lathe alone. As above but without motor, workbench. U.L. listed.

ORDERING INFORMATION:

9 HT 2380N—Wt. 80 lbs. \$159.95



Whatever the job... your CRAFTSMAN® Lathe can do more with these Accessories

YOU CAN DO MORE...



(1 thru 12) Wood-turning Tools. Save on Sets (except Hobby)

CONSTRUCTION: Double-tempered high-speed steel blades measure 4 1/2-in. long. Precision-ground tips. Grooved 10-in. long hardwood handles for positive grip. Tools (9) thru (12) specially designed for face-plate turning of items such as bowls, etc.

ORDER INFO: Warranty p. 101.

Tool	Catalog Number	Wt. oz.	Price
(1) 1/2-in. Skew Chisel	9 HT 28527	9	\$5.99
(2) 1/8-in. Parting Tool	9 HT 28526	8	5.99
(3) 1/2-in. Round Nose	9 HT 28525	9	5.99
(4) 1/2-in. Spear Point	9 HT 28524	9	5.99
(5) 3/4-in. Gouge	9 HT 28523	10	7.99
(6) 1/2-in. Gouge	9 HT 28522	9	6.99
(7) 1/2-in. Gouge	9 HT 28521	8	5.99
(8) Half-round	9 HT 28531	12	7.99
(9) Full-round	9 HT 28532	12	7.99
(10) Left Skew	9 HT 28533	12	7.99
(11) Right Skew	9 HT 28534	12	7.99
(12) 1-in. Skew Chisel	9 HT 28528	11	7.99

Complete 12-pc. Set of Wood-turning Tools. Includes (1 thru 12) above.

ORDERING INFO:

Save \$20.00. Sep. prices total \$84.88.

9 HT 2867—Shpg. wt. 6 lbs. 8 oz. Set \$64.88

8-pc. Set of Wood-turning Tools. (1 thru (7), (12).

ORDER INFO: Wt. 4 lbs. 2 oz. 9 HT 2859 Set \$44.99

4-pc. Set of Spindle Turning Tools. (2, 3, 5, 12) above.

ORDER INFO: Wt. 2 lbs. 4 oz. 9 HT 2853 Set \$24.99

4-pc. Set of Face Plate Turning Tools. (8) thru (11).

ORDER INFO: Wt. 2 lbs. 6 oz. 9 HT 2869 Set \$26.88

8-pc. Set of Precision/Hobby Wood-turning Tools (not shown). Tempered high-speed steel blades 3 1/2-in. long. Ground tips. 5 1/2-in. long hardwood handles.

ORDER INFO: For use with large lathes as above and hobby lathe on p. 18. Warranty p. 101. Wt. 3 lbs. 4 oz.

9 HT 2984 Set \$29.99

(13 thru 28) CRAFTSMAN® Lathe Accessories

(13) Work Arbors with Chucks. 3-jaw screw-on. 1/2-in. capacity. 1/2-20 thread.

SIZES AND ORDERING INFORMATION:

No. 1 Morse Taper.

9 HT 22344—Shpg. wt. 1 lb. 8 oz. \$5.79

No. 2 Morse Taper.

9 HT 22472—Shpg. wt. 1 lb. 10 oz. \$5.79

(14) Work Arbors. 2 steel flanges, nut on head for clamping wheels. 1/2-20 threaded spindle.

SIZES AND ORDERING INFORMATION:

No. 1 Morse Taper.

9 HT 21534—Shpg. wt. 11 oz. \$3.49

No. 2 Morse Taper.

9 HT 21522—Shpg. wt. 13 oz. \$3.49

(15 thru 19) Morse Taper Centers.

TYPES, SIZES, ORDER INFORMATION:

Tool	Catalog Number	Wt. oz.	Price
(15) No. 1 Screw	9HT21164	8	\$3.99
(16) No. 2 Screw	9HT21152	12	4.49
(17) No. 1 60° Ball Bearing	9HT21122	11	6.79
(18) No. 2 60° Ball Bearing	9HT21132	13	6.99
(19) No. 2 Spur	9HT21062	6	2.99
(20) No. 2 Spur	9HT21072	9	3.99
(21) No. 2 Tailstock Cup	9HT21002	5	2.99
(22) No. 2 Tailstock Cup	9HT21012	6	2.99
(23) No. 1 60-degree	9HT21102	5	2.99
(24) No. 2 60-degree	9HT21112	6	3.29

Draw Bolt. Use to secure center (9 HT 21164) above and work arbor (9 HT 21534) to spindle.

ORDERING INFORMATION: (Not shown) 9 HT 21542—Shipping weight 5 ounces. 99c

(20) Work Arbors. Each arbor is 3 3/8-in. long with a 2 3/8-in. spindle. 1/2-20 thread. Carbon steel arbor. Steel flanges.

BORE SIZES AND ORDER INFORMATION:

9 HT 21643—1/2-in. bore. Wt. 14 oz. \$2.49

9 HT 21644—3/4-in. bore. Wt. 14 oz. 2.49

(21 and 22) Centers

Fit 3/8-in. arbors.

TYPES, ORDER INFO:

(21) Headstock Spur.

9 HT 21052—Wt. 7 oz. \$3.49

(22) Tailstock Cup.

9 HT 21022—Wt. 7 oz. \$2.99

(23) 6-in. Face Plate. Cast-iron. For 3/4-16 threaded arbor. 6 holes.

ORDER INFO: Wt. 1 lb. 10 oz. 9 HT 24904 \$9.50

(24) Sanding Plate. 9-in. diam.; 3/4-16 thread. Includes 1 sanding disc.

ORDER INFO: Wt. 1 lb. 2 oz. 9 HT 24906 \$11.50

(25) 4-in. Face Plate. Cast iron. 3/4-16 threaded arbor. **ORDER INFO:** 9 holes. 9 HT 2489—Wt. 13 oz. \$8.50

4-in. Face Plate. Cast aluminum. 8 holes. **ORDER INFO:** Wt. 1 lb. 4 oz. 9 HT 23865 \$7.50

(26) Bowl Turning Tool Rest. Cast iron. 7/8 diam. shank. **ORDER INFO:** Wt. 2 lbs. 6 oz. 9 HT 24903 \$9.50

(27) 3-inch Face Plate. Cast-iron. 3/4-16 thread. **ORDER INFO:** Wt. 1 lb. 4 oz. 9 HT 20912 \$8.99

(28) Speed Reducer. Reduces speed to as low as 300 rpm with 1725 rpm, 48- or 56-frame motors. **ORDER INFO:** Wt. 8 lbs. 2 oz. 9 HT 23895 \$29.99

Tilt-table has $\frac{3}{4} \times \frac{3}{8}$ -in. groove for using miter gauge, available on page 20

Use belt for end, surface, edge, and bevel finishing . . . great for curved pieces, too

CRAFTSMAN® Belt-Disc Sander

Has over 100 sq. in. of sanding surface for rough and fine finishing on flat, beveled or irregular surfaces

Sander alone
\$159⁹⁵

Complete outfit:
Sander with Stand and Motor
Save \$22.98
Separate prices **\$229⁹⁵**
total \$252.93

Belt tilts and locks at any angle from horizontal to vertical position . . . table removable for use with either disc or belt

Use disc for sanding large and small stock when accuracy is essential

Belt-disc Sander with Motor and Stand

BELT, DISC: 6x48-inch belt tilts, locks at any angle from 0 to 90°. Removable backstop. Belt travels at about 2700 ft. per min. Adj. belt tension, tracking, 9-in. diam. disc.

TABLE, BASE: Removable 6 $\frac{1}{2}$ x12-inch cast metal table tilts to 45° for bevel sanding . . . has $\frac{3}{4} \times \frac{3}{8}$ -inch groove for using miter gauge (not included). Drive shaft and pulleys revolve on permanently lubricated ball bearings.

STAND, ACCESSORIES: Steel stand, rubber-padded leveling feet. Top 19 $\frac{1}{2}$ x15 $\frac{1}{4}$ inches. One medium grit disc and belt, machine, motor pulleys, guard with 2 $\frac{1}{2}$ -inch diameter coupling for vac and V-belt. Sent unassembled.

MOTOR: Capacitor-start $\frac{1}{2}$ -HP, 3450-rpm motor. Pre-lubricated sleeve bearings.

ELEC. INFO: Runs on 115-volt, 60-Hz. AC. 720 full-load input watts. Lockable pull-on/push-off power switch with 6-ft., 3-wire cord.

ORDERING INFO: See warranty on page 5, motor warranty on pg. 27. Order goggles pg. 75.
9 HT 22525N3—Shpg. wt. 133 lbs. . . \$229.95

Sander alone. No motor, stand. UL listed.
9 HT 2252N—Shpg. wt. 77 lbs. . . . \$159.95


Stand alone. Fits sander above, shaper below.
9 HT 22213C—Shpg. wt. 39 lbs. . . . \$39.99

Motor alone. Fits sander above, shaper below.
9 HT 1216C—Shpg. wt. 17 lbs. . . . \$52.99

(1) Heavy-duty Caster Set

Support up to 400 pounds. Steel frame with phenolic plastic wheels. Front 2 $\frac{1}{2}$ -in. diameter swivel casters; rear 3-inch non-swivel caster. T-handle adjusts height.

ORDER INFO: Fits most Craftsman tool stands. Set of four. Shpg. wt. 6 lbs.
9 HT 22201 . \$19.99

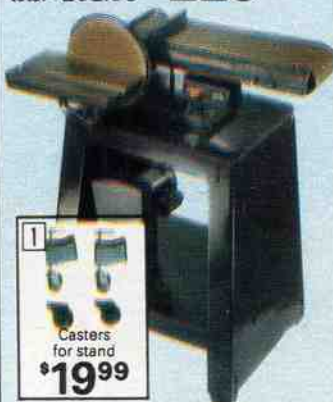

CRAFTSMAN® High-speed Shaper

Cutter runs at fixed speed of approximately 9000 rpm for making scallops, rabbets, moldings, contours—plus much more with cutters sold below—cuts so smooth almost no sanding needed

Shaper with Stand and Motor

CONSTRUCTION, CAPACITY: Cutter head revolves at approximately 9,000 rpm for smooth cuts. One-piece, ground cast-iron table measures 19x27 inches . . . has $\frac{3}{4} \times \frac{3}{8}$ -inch groove for miter gauge (sold separately on page 20). Each half fence individually adjustable from left to right, front to rear. Features cutter guard for contour shaping. Spindle turns on permanently lubricated ball bearings. Spindle height adjusts $\frac{1}{8}$ -inch and accepts cutters of $\frac{1}{2}$ -inch bore up to 2 $\frac{1}{2}$ -inch diameter. Cutters can be used singly or in combination.

STAND, ACCESSORIES: Includes steel stand with rubber padded leveling feet to help prevent marring and creeping. Also belt pulley guard, hardened collars, nuts, washers, motor and machine pulleys and V-belt. Stand sent unassembled.

MOTOR: Capacitor-start $\frac{1}{2}$ -HP, 3450 rpm motor. Pre-lubricated sleeve bearings.

ELECTRICAL INFO: Runs on 115-volt, 60-Hz. AC. 720 full-load input watts. Lockable pull-on/push-off power switch with 6-foot, 3-wire cord.

ORDERING INFORMATION: See warranty on page 5, motor warranty on page 27. Order casters above, goggles page 75.
9 HT 23938N3—Shipping weight 151 pounds . . . \$259.95

Shaper alone. Without stand or motor. UL listed.
9 HT 2393N—Shipping weight 95 pounds . . . \$189.95

(2 thru 16) Shaper-cutters

Use with shaper above right (singly or in combination) to make patterns shown at far right. All cutters have 2-inch diameter, $\frac{1}{2}$ -inch bore; all are 1 inch high except (9), $\frac{1}{2}$ -inch high and (11), $\frac{1}{4}$ -inch high. Made of long-lasting alloy steel.

SHAPE, ORDERING INFORMATION:

Shaper Cutter Type	Catalog Number	Wt.	Price
(2) Lip Cupboard Door or $\frac{1}{2}$ -in. Quarter Round . . .	9 HT 3294	5 oz.	\$5.59
(3) 1-inch Jointer . . .	9 HT 3289	5 oz.	5.59
(4) 3-bead, $\frac{1}{4}$ -in. Molding . . .	9 HT 3293	5 oz.	5.59
(5) $\frac{1}{2}$ -in. radius Base Shoe Molding or $\frac{1}{2}$ -in. $\frac{1}{4}$ -Round	9 HT 3285	5 oz.	5.59
(6) $\frac{1}{4}$ -in. Tongue and groove Matched Set . . .	9 HT 3283	8 oz.	10.99
(7) $\frac{1}{4}$ and $\frac{1}{2}$ -in. radius Ease Edge or $\frac{1}{4}$ -inch Glass Bead	9 HT 3295	5 oz.	5.59
(8) Drop Leaf Bead . . .	9 HT 3291	5 oz.	5.59
(9) $\frac{1}{2}$ -inch Groove . . .	9 HT 3288	4 oz.	5.59
(10) Reversible Glue Joint . . .	9 HT 3284	5 oz.	5.59
(11) $\frac{1}{4}$ -inch Groove . . .	9 HT 3287	4 oz.	5.59
(12) Taper Edge . . .	9 HT 3292	5 oz.	5.59
(13) Drop Leaf Cove . . .	9 HT 3290	5 oz.	5.59
(14) $\frac{1}{4}$ -in. Ease Edge or Screen Molding . . .	9 HT 3286	5 oz.	5.59
(15) 2 $\frac{1}{2}$ -in. diam., $\frac{3}{4}$ -in. Quarter Round . . .	9 HT 3281	5 oz.	7.99
(16) 2 $\frac{1}{2}$ -in. diam., $\frac{3}{4}$ -in. Ogee . . .	9 HT 3282	5 oz.	7.99

15-piece Set of Alloy steel Shaper-cutters Save \$14.06. Sep. prices total \$94.05.

Includes (2) thru (16) above.

ORDERING INFORMATION:

9 HT 32907—Shipping weight 3 lbs. . . . Set \$79.99

(17) Sash and Door Cutting Kit

USES: For making intricate cuts used in door and window frames.

COMPOSITION: Includes 5 spacer collars with $\frac{1}{2}$ -inch bore ($\frac{1}{8}$, $\frac{1}{4}$, $\frac{3}{16}$, $\frac{1}{2}$ and 1 inch); sash cutter blade; 3 recessed nuts ($\frac{1}{2}$ x24, $\frac{1}{2}$ x20, $\frac{1}{2}$ x16 Acme thread); and hex key.

ORDER INFO: Use with shaper above or former shapers 9-2392, 9-2394. Shpg. wt. 8 oz.
9 HT 2407 . . . Kit \$8.99

(18) 5-piece Shaper Collar Set

Fits $\frac{1}{2}$ -inch spindle. **USE:** Provides bearing surface above or below cutter for part not to be shaped.

ORDERING INFORMATION: For use with shaper above or former shapers 9-2392 and 9-2394. Wt. 8 oz.
9 HT 23672 Set \$5.79

Shaper with Stand and Motor.

Save \$22.98
Separate prices **\$259⁹⁵**
total \$282.93



Includes Shaper Cutter Guard for contour shaping

YOU CAN DO MORE...
Whatever the job . . . your CRAFTSMAN® Shaper can do more with these Accessories



COMPBK SLAEGUD **Sears** 13

CRAFTSMAN® 15½-inch Drill Presses

Drill Press Specifications for both Presses (A) and (B)

Speeds-eight	380, 480, 720, 1325, 2300, 4250, 6400, 8550 R.P.M.
Distance spindle to column	7¼ inches
Distance base to chuck	48½ inches (maximum)
Table travel	42½ inches
Spindle	No. 33 Jacobs taper
Spindle travel	4 in. (maximum)
Depth graduations	⅛-inch

Chuck capacity	0-½-inch
Drive splines	Six
V-belt	¾x45 inches
Machine pulley	6-inch, 8-step
Motor pulley	6-inch, 8-step ⅝-inch bore keyed
Height x width x depth	72¼x15x27 inches
Motor	Use ½-HP, 1725-rpm

Home-Shop Drill Press

One-piece head and single row lower spindle ball-bearing assembly

(A) Home-Shop Drill Press without motor. UL listed.

Designed for the needs of the home workshop or light industry. HEAD CONSTRUCTION: One-piece cast-iron. Lower spindle bearing assembly is single-row ball bearing type for prolonged drill life and smooth operation. Pulley turns on ball bearings. Built-in work light. Light and power switches work independently . . . power switch has 6-foot, 3-wire cord and receptacle for connecting 115-volt motor. COLUMN, TABLE, BASE: Steel column. Cast-iron slotted work table with clamping ledges for mounting accessories measures 10x12 in. Table slides up or down on column a total of 42½ inches. Cast-iron base has pre-cast holes for bolting base to floor (bolts not incl.).

ACCESSORIES: Includes chuck, key, belt, machine and motor pulleys. Motor not included . . . order drill press with motor below or use a minimum ½-HP, 1725-rpm motor. Additional accessories for specialized wood working operations, metal and wood drilling sold separately below.

ORDER INFO: See specifications above, warranty on p. 5.

9 HT 2137N—Shipping weight 181 pounds . . . \$289.95

Home-Shop Drill Press with Motor

As (A) above but with ½-HP, 1725-rpm motor. Capacitor start with sleeve bearings.

ELECTRICAL INFORMATION: Uses 115-volt, 60-Hz. AC. 660-full load input watts. With 4-ft., 3-wire cord that connects to power switch in drill press.

ORDERING INFORMATION: For more complete motor description and warranty see 9 HT 1255C on page 26.

9 HT 2137 1N2—Shipping weight 202 pounds . . . \$324.95

Drill Press with Motor
Save \$17.99
Sep. prices total \$342.94
\$324.95

For more information on CRAFTSMAN® Bench Power Tools and Accessories, send for FREE BOOKLET 39 HT 7499

A Built-in Work Light—switch independent of power switch

Shaper Fence Attachment (1) sold separately below

10x12-inch Work Surface

Spindle-mount Drill Press Accessories for specialized wood-working operations



Dress and finish rough stock

(1) CRAFTSMAN Shaper Fence Attachment

Shown mounted on press above. Helps support work pieces for shaping work like picture frames or decorative moldings.

CONSTRUCTION, CAPACITY: Hardwood fences open 1 to 3 in. Independently adjustable. Fits most Craftsman drill presses.

ORDER INFO: Use with adapter (4) right.

9 HT 2486—Wt. 5 lbs. 8 oz. . . . \$31.99



For making round mortises

(3) Drill Press Mortising Kit

CONSTRUCTION: Hold-down and guide of cast aluminum . . . holds workpieces up to 4¼-in. thick. Mortising bits are made of high speed steel, hardened, tempered and ground. Bits plunge cut fast and easily.

KIT COMPOSITION: Hold-down and guide, ½, ¾, 1¼-in. diam. mortising bit for mortises ½-in. wide to 2-in. deep, ¾-in. wide to 1½-in. deep, 1¼-in. wide to 1½-in. deep. Attaching nuts, bolts, and instructions are included.

ORDER INFO: Fits most drill presses.

9 HT 29503—Wt. 2 lbs. 3 oz. . . . Kit \$19.99



(4) Adapter for shaper fence

CONSTRUCTION, CAPACITIES: Steel. Accepts ½-inch bore shaper cutters up to 2-in. in diam., ½x20 threaded spindle. Fits drill presses on these two pages, most Craftsman, and others with No. 33 Jacobs taper.

ORDERING INFORMATION: Order shaper cutters separately on page 13.

9 HT 24832—Shpg. wt. 12 oz. . . . \$5.99



(5) CRAFTSMAN Circle Cutters. Bit of high speed ground tool steel . . . graduated in ⅛-in. With set screw wrench.

SIZES, CAPACITIES, ORDER INFO:

½-in. shank. Cuts 1¼ to 6½-in. diam.

9 HT 3640—Shpg. wt. 14 oz. . . . \$7.99

¾-in. shank. Cuts ¾ to 4-in. diam.

9 HT 3645—Shpg. wt. 7 oz. . . . \$4.99

(6) Mortising Chisel Housing. For (7) below. Fits most Craftsman drill presses with ⅝-in. or 1⅞-in. quill.

ORDER INFO: Use with (14) facing page.

9 HT 2465—Wt. 4 lbs. 2 oz. . . . \$14.99

(7) Hollow Mortising Chisels. For (6) above and former 9-2464.

SIZES, ORDER INFO: Shpg. wt. 4 oz.

Catalog No. Size Cut Depth Each

9 HT 24201 ¼-in. 1⅞-in. \$8.99

9 HT 24202 ¾-in. 3-in. 9.49

9 HT 24203 1½-in. 3-in. 9.49

Mortising Bits. For (6) above.


9 HT 24221 ¼-in. \$6.99

9 HT 24222 ¾-in. 7.49

9 HT 24223 1½-in. 8.49



Squares bit holes to make mortises

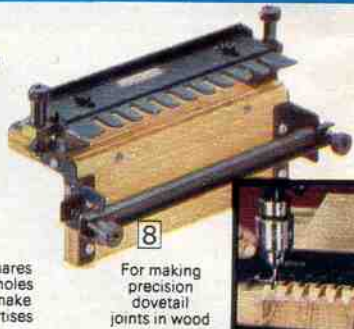

For making precision dovetail joints in wood

(8) Dovetail Attachment

Make sturdy dovetail joints like drawers of fine cabinets. This attachment also cuts flush or lipped joints.

CONSTRUCTION, CAPACITY:

Made of hardened steel.

Clamp holds work pieces at 90° angle and bit cuts drawer front and side at the same time.

Slotted comb controls spacing and depth of cut.

Includes end plates, comb screw fittings, clamps, wood parts and operating and set-up instructions. For use with any drill press. Uses ½-inch Dovetail Cutter router bit (9 HT 25531) not included . . . order separately on page 133.

ORDERING INFORMATION:

Shpg. wt. 3 lbs. 8 oz.

9 HT 2462 . . . \$22.99

Cast-iron head, table, and base help reduce vibration to give you a sturdy, stable work surface

- **8 Speeds**—from 380 to 8550 rpm to give you the correct speed for a variety of jobs
- **Powerful Torsion Spring**—provides quick, positive quill return ... just set depth gauge to make repetitive drilling easy
- **Pull-on/Push-off Power Switch**—located up front for quick, easy access; has removeable locking key

Industrial-type Drill Press

Split head with take-up adjustment to compensate for normal quill wear, double-row lower ball bearing assembly for durability

(B) **Industrial-type Drill Press without motor.** UL listed (conforms to UL standard 987). Designed to produce accurate results according to the close tolerances and specifications required in industrial and/or commercial-type applications.

HEAD CONSTRUCTION: Split-head of cast iron with take-up adjustment that allows you to compensate for normal quill wear. Double-row lower ball bearing assembly is pre-loaded to minimize spindle drop ... withstand heavier thrusts than Home-Shop Drill Press at left. Pulley turns on permanently lubricated ball bearings. Conveniently located pull-on/push-off power switch has 6-ft., 3-wire cord and receptacle for connecting 115-v. motor.

COLUMN, TABLE, BASE: Steel column. Cast-iron table with "T" slots for attaching accessories ... has trough for catching liquid coolants. Measures 14x14 1/4 inches. Table slides up or down on column a total of 42 1/2 inches. Cast-iron base with pre-cast holes for bolting base to floor (bolts not included).

ACCESSORIES: Includes chuck, key, belt, machine and motor pulleys and pulley guard. Motor not included ... order drill press with motor below or use minimum 1/2-HP, 1725-rpm motor.

ORDERING INFORMATION: See specifications at top of facing page. See warranty on page 5. Order safety goggles p. 75.

9 HT 2461N—Shipping weight 200 pounds \$349.95

Replacement V-belt for Drill Press (B) above.

9 HT 1745—Shipping weight 3 ounces \$4.90

Industrial-type Drill Press with Motor. As in (B) above but with 1/2-HP, 1725-rpm motor. Capacitor start, ball bearings.


ELECTRICAL INFORMATION: Uses 115-230-volt, 60-Hz. AC. 660-full-load input watts. With 4-ft., 3-wire cord that connects to power switch in drill press. Switch for 115-volt use only.

ORDER INFO: For motor description see 9 HT 1254C, page 26.

9 HT 24613N2—Shipping weight 221 pounds \$389.95

Drill Press with Motor
Save
\$27.99
Separate prices total \$417.94
\$389.95

14x14 1/4-inch work surface

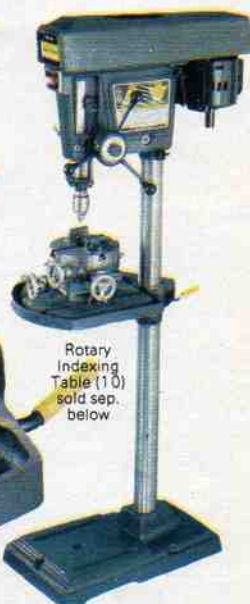

Rotary Indexing Table (10) sold sep. below

Table-mount Drill Press Accessories for specialized, accurate metal and wood drilling

Whatever the job ... your CRAFTSMAN® Drill Presses can do more with these Accessories

YOU CAN DO MORE...



(9) **Universal Compound Vise.** For all types of drill press operations on small metal pieces in which holes, key slots, etc. must be accurately located, spaced or shaped. CONSTR., CAPACITY: Cast-iron. Jaws open to 4 1/4 inches. One jaw swivels; other jaw has movable face. 90° graduations. 7x7-inch table size overall ... 6x5-inch table travel. 4 3/4 inches high. With wrench. Bolts to drill press table. Bolts are included. ORDERING INFO: Shpg. wt. 35 lbs. 9 HT 2432C ... \$199.95



(10) **Rotary Indexing Table.** For layout, indexing, holding, drilling, milling, routing and shaping, etc. CONSTR., CAPACITY: Cast-iron and steel. Jaws open to 4 1/4-in. Dial calibrated in 3-min. intervals to .001-in. tolerance. 8-in. diam. table rotates 360°. Bolts to table. Bolts not incl. ORDERING INFORMATION: 9 HT 2495L—Wt. 41 lbs. \$219.99

(11) **Angle Vise with swivel base.** For angle drilling or jobs where vise jaws are positioned out from under drill chuck and bit. CONSTRUCTION, CAPACITY: Cast-iron and steel. Steel-faced jaws open to 2 1/2-in. Vise adjusts from 0 to 90° ... turns 360° on detachable swivel base. Vise can be used horizontally. Bolts to table. Bolts not included. ORDERING INFORMATION: 9 HT 2752—Wt. 12 lbs. 15 oz. \$34.99



(12) **Gen-purpose Vise.** CONSTR., CAPACITY: Steel and cast-iron. Steel-faced jaws open to 3 inches wide. Cast-iron base is 8 inches long. Bolts to drill press table ... bolts are not included. ORDERING INFORMATION: Shpg. wt. 8 lbs. 2 oz. 9 HT 2757 \$19.99

(13) **Angle Vise.** Same construction and capacities as (11) at left, but without swivel base. Measures 9 inches long. ORDERING INFORMATION: Shpg. wt. 9 lbs. 13 oz. 9 HT 2756 \$22.99



(14) **Adjustable Hold-down and Guide.** CONSTRUCTION AND CAPACITY: Cast-iron. Hold-down adjusts to accommodate work pieces up to 5 inches thick. Fits most drill presses. Bolts to table ... bolts not included. ORDER INFO: Shpg. wt. 5 lbs. 9 HT 2457 ... \$14.99



(15) **Tilt Table.** CONSTR., CAP.: Cast-iron. Indexes at 45° or 90° left or right ... rotates and locks at any angle in between. 8 1/2 x 11 1/4 inches. Mounts to back of existing table. ORDER INFO: Shpg. wt. 12 lbs. 8 oz. 9 HT 2439 \$25.99

Our popular CRAFTSMAN® 6½-inch Jointer-Planer

It has 3 high-speed ground steel knives... dresses wood up to 6 in. wide to give you perfect joints, and establishes straight, smooth edges on rough stock



Our Jointer-Planer is the perfect complement to our Radial And Table Saws on pages 3, 4, 5, 8, 9, 10, and front cover



For more information on Craftsman Bench Power Tools and Accessories, Send for FREE booklet 39 HT 7499

(1) Jointer-Planer, motor, and stand
Save \$33.00 Separate prices total \$372.93 **\$339.93**

Jointer-Planer with motor
Save \$23.00 Separate prices total \$332.94 **\$309.94**

(2) Jointer-Planer alone
\$279.95

MOTOR: Capacitor start, 3450-rpm, ½-HP motor (9 HT 1216C). Pre-lubricated sleeve bearings, for durability and smooth operation.

CAPACITY. CONSTRUCTION: Cutter head spins on permanently lubricated ball bearings. 3 precision-ground-steel knives cut to ½-inch deep by raising, lowering infeed table. Make up to 12,900 cuts per minute. Rigid 1-piece cast iron bed and outfeed table. Cast-iron fence has single locking knob for bevel and lateral adjustments... also has positive stops at 45°, 90°. Built-in scale shows degree of fence tilt. 40°x20°x93° in. high.

STAND ACCESSORIES: Steel stand. Top, 37½x15¼ in. wide. Adjustable leveling feet... rubber pads resist creeping. Incl. motor mount. 2 wood hold-down push blocks. V-belt machine, motor pulleys, belt guard. Stand unassembled.

ELECTRICAL INFO: 115-v., 60 Hz. AC. 720 full-load input watts. Lockable pull-on/push-off power switch. 4-ft., 3-wire cord. Switch has 115-v. receptacle for connecting motor. UL listed (conforms to UL standard 987).

ORDER INFO: Warranty page 103. Order goggles p. 75.

(1) Jointer-Planer, Motor and Stand.
9 HT 20686N3—Shipping weight 186 pounds... \$339.93

Jointer-Planer with motor. Without stand.
9 HT 20681N2—Shipping weight 143 pounds... \$309.94

(2) Jointer-Planer alone. Without motor or stand.
9 HT 2068N—Shipping weight 126 pounds... \$279.95

Steel Stand for Jointer-Planer. Stand as described at left, shown above with (1). Height adjusts from 27½ to 30½ in. ORDERING INFORMATION: See "N" suffix, page 82.

9 HT 22216N—Shipping weight 43 pounds... \$39.99

Extra Cutting Knives (not shown). Precision-ground steel. For replacing knives in jointer-planer (1 and 2) described at left only. Package of 3 knives. Order knife setting gauge set below separately.

ORDERING INFORMATION:
9 HT 2293—Shipping weight 13 oz. Pkg. \$9.99

(3) **Knife Setting Gauge Set.** For installing new or re-sharpened cutter knives. Cast-iron gauge with micrometer adjustments. Includes blade touch-up stone.


ORDERING INFORMATION:
9 HT 2647—Shipping weight 1 lb. 10 oz. Set \$14.99

CRAFTSMAN® Planer-Molder

Handles wood up to 12 inches wide and 6 inches thick you set the thickness you want. It planes rough surfaces and edges to a professional smoothness and precise thickness. Also makes trim for windows, doors, baseboards and other projects



Complete outfit
\$889.00

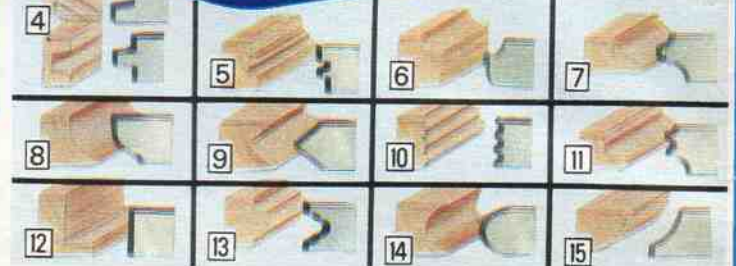

MOTOR: High-torque, capacitor-start, 2-HP, enclosed motor (9HT1231C). Perm. lubricated ball bearings. Fan-cooled.

CAP. CONST.: 3-knife, ball-bearing cutter-head planes up to ¾ in. deep, molds up to ¾ in. deep in single pass... turns at 4,000 rpm. Hard rubber rollers. 42-in. steel bed.

STAND. ACCESSORIES: Steel stand 22½ in. high with 24¾-in. square bottom. Includes cast-iron 2-groove motor pulley and drive belts. Pushbutton on-off switch.

ELEC. INFO: 115-230-v., 60-Hz. AC. 2200 full-load input w.

ORDERING INFO: See warranty p. 5, Shipping Note p. 34.
T9 HT 23396N3—Shipping weight 299 pounds... \$889.00

Planer-Molder alone. Without stand, motor, switch, motor pulley, or V-belts.
ORDER INFO: See warranty p. 5. Order safety goggles p. 75.
9 HT 2339N—Shipping weight 225 pounds... \$589.00

Planer-Molder with 5-HP motor. Like Planer-Molder at left but with 5-HP motor (9 HT 1232N)... heavy-duty for commercial and continuous use.

MOTOR: Capacitor-start, induction-run, totally-enclosed, fan-cooled. Permanently lubricated ball bearings. Manual reset overload protector.

ELECTRICAL INFORMATION: 230-v., 60-Hz. AC. 5500 full load input watts.

ORDER INFO: See warranty p. 5, Shipping Note p. 34. Order safety goggles p. 75.

T9HT23386N3—Shpg. wt. 356 lbs. \$999.00

Replacement Knives for both 2 and 5-HP Planer-Molders. High-speed hard steel.

ORDERING INFORMATION: Set of three.
9 HT 4749—Shpg. wt. 1 lb. 6 oz. Set \$28.95

(4 thru 15) **Molding Cutter Bits** For Planer-Molders at left. Alloy steel.

ORDERING INFORMATION:

Shaper Cutter type	Catalog Number	Shpg. wt.	No. in Set	Set
(4) Tongue and groove	9HT23302	4 oz.	6	\$8.49
(5) Glue joint	9HT23307	2 oz.	3	4.49
(6) ¾ in. qtr. round cove	9HT23312	2 oz.	3	4.49
(7) ½-¾ in. qtr. rd.	9HT23304	2 oz.	3	4.49
(8) Ogee window stop	9HT23308	2 oz.	3	4.49
(9) 90° flute V-groove	9HT23309	2 oz.	3	4.49
(10) 3-bead	9HT23305	2 oz.	3	4.49
(11) ¾-¾ in. qtr. rd.	9HT23313	2 oz.	3	4.49
(12) Rabbit	9HT23301	2 oz.	3	4.49
(13) Clover-leaf screen mold	9HT23306	2 oz.	3	4.49
(14) 1-in. radius flute	9HT23311	2 oz.	3	4.49
(15) Base mold	9HT23303	2 oz.	3	4.49

Compact Bench Tools perform many of the tasks our larger bench tools can, yet they're small enough for home work areas



(1) Radial Drill Press

HEAD CONSTRUCTION: Cast-iron 1-pc. head swivels up to 45° for angle drilling. Pre-lubricated sleeve bearings. Belt guard.

COLUMN, BASE: 1 1/2-inch diameter 14-gauge steel column. 6x9-inch cast-iron base with mounting holes.

CAPACITIES: Drills to center of 32-in. wide stock. Depth scale graduated in 16ths-in. Chuck takes bits with 3/64 to 1/2-in. shank. Spindle 16 in. from column. Geared chuck travels 2 in. Overall: 8 1/2 x 22 x 23 in. high.

ACCESSORIES: Includes chuck; key; V-belt; 3-step machine, motor pulleys.

ORDER INFO: Order motor 9 HT 1253C (p. 26), stand, bits (p. 118) separately.
9 HT 2397C—Wt. 30 lbs. ...\$84.99

(2) 8-inch Table Saw

BLADE, CAPACITY: Kromedge® 8-in. combination blade fits 3/8-in. arbor, cuts wood to 2 1/4 in. thick at 90°, 1 1/16 in. thick at 45°. Bevel scale shows degree of blade tilt. Table surface in front of blade at 1-in. cutting depth is 5 in. Rip fence positions to right or left of blade for rips to 5 in. wide, 10 in. with extension (3).

TABLE: Cast-iron, 10 1/2 x 13 in. wide.

ACCESSORIES: Blade guard, rip fence, miter gauge, V-belt, machine and motor pulleys.

ORDER INFORMATION: Extensions, motor 9 HT 1253C (page 26), stand sold separately.
9 HT 2412C—Wt. 26 lbs.\$64.99

(3) 5-inch Extensions. Fit 8-inch Table Saw (2) above. Pkg. of 2. Aluminum.

9 HT 24238—Wt. 4 lbs. 4 oz. Pkg. \$9.99

(4) 4 1/2-inch Jointer-Planer

CONSTRUCTION, CAPACITY: Cutter head spins on permanently-lubricated ball bearings. 3 steel blades plane up to 4 in. wide. Cast-iron 1-pc. base 21 3/8 x 4 1/8 in. Outfeed and infeed tables 4 x 10 in., adjust to 1/8-in. max. depth of cut. Aluminum fence with calibrations for beveling to 45°. Overall: 8 1/2 x 24 x 7 in. high.

ACCESSORIES: Includes V-belt; machine, motor pulleys; guard.

ORDERING INFO: Order motor 9 HT 1253C (p. 26), stand, mount separately. Shpg. wt. 19 lbs.
9 HT 2187C.....\$64.99

(5) Belt-Disc Sander

CONSTRUCTION: Cast-aluminum 4x9-in. disc table tilts, locks at any angle horizontal to 45° for bevel sanding. Uses 1/4-in. shaft accessories. Cast-iron 4x12-in. belt table. Belt tilts, locks horizontal or vertical. Adjustable belt tension, tracking. Drive shaft, pulleys turn on pre-lubricated sleeve bearings. Overall: 4x22x7 inches high.

ACCESSORIES: V-belt; machine, motor pulleys; 6-in. disc; 4x36-in. belt.

ORDERING INFO: Order extra discs and belts (p. 117), motor 9 HT 1253C (p. 26), mount, stand separately. Shpg. wt. 17 lbs.
9 HT 2264C.....\$64.99

CRAFTSMAN Stand for tools (1, 2, 4 and 5)

\$24.99

(6) Steel Stand for (1, 2, 4, 5). Top 21 1/2 x 16 1/16 inches. Adjusts from 26 to 34 inches high.

ORDERING INFO: Unassembled. Shpg. wt. 23 lbs.
9 HT 22219C.....\$24.99

Motor Mount (not shown). For (4, 5). Swivels; holds belt tension. **ORDERING INFO:** Shipping weight 1 lb. 12 oz.
9 HT 2730—Steel\$3.50

(7) 12-inch Lathe

CAPACITY: 3-step machine motor pulleys for speeds of 850, 1725, 3450 rpm. Maximum 12-in. swing. 6 in. from center of spindle to bed. 36 in. between centers.

CONSTRUCTION: Cast-iron headstock with 3/4-16-in. threaded spindle, tailstock. Steel tubing bed. Permanently-lubricated ball bearings. Ball thrust cup center. 49 1/2 x 7 x 10 3/4 inches high.

ACCESSORIES: 3-step machine, motor pulleys; V-belt; tool rest; spur; cup centers; instructions.

ORDERING INFO: Order motor 9 HT 1253C (p. 26), workbench (p. 72) separately.
9 HT 2387L—Shpg. wt. 28 lbs.\$64.99

(8) Speed Reducer for Lathe (7)

Reduces speed to 300 rpm with 1725-rpm motors, 600 rpm with 3450-rpm motors. Fits NEMA 48- or 56-frame motors. Cast aluminum, steel.

ORDERING INFORMATION:
9 HT 23895—Wt. 8 lbs. 2 oz.\$29.99

Motor Switch (not shown). Pull-on/Push-off switch with built-in locking key. For use with motors rated at no more than 15 amps or 3/4 HP at 125-v. UL listed. 6-ft. cord.

ORDERING INFORMATION:
9 HT 13633—Wt. 2 lbs.\$12.50

12-inch Lathe turns lamp bases, table legs, bowls, also sands and polishes

\$64.99



CRAFTSMAN® Motorized Sander-Grinder with 1/3-HP built-in motor

(9) Sander-Grinder with motor

Versatile sander-grinder can be used for numerous hobby and work tasks. Grind metal, sharpen tools, use for inside finishing and contour sanding jobs.

MOTOR: 1/3-HP split-phase, 1725-rpm motor. Permanently lubricated ball bearings. Built-in guard over pulleys. Built-in on/off switch.

SANDING BELT: Belt moves at approximately 3000 feet per minute. Aluminum oxide, medium grit belt is 1x42 inches long. Re-thread belt through openings for inside sanding tasks.

HOUSING AND TABLE: Steel frame, rubber mounts help to reduce vibration. 7x9 inch steel worktable . . . tilts forward 60°. Overall: 18x9 1/2 x 21 inches high.

ACCESSORIES: Includes pulley, V-belt.

ELECTRICAL INFO: 4-ft., 3-wire cord, 115-v., 60-Hz. AC. 490 full load input watts. UL listed.

ORDERING INFORMATION: See warranty pg. 28. Shipped completely assembled.
9 HT 2256L—Wt. 52 lbs.\$129.95

Extra Sanding Belts. Use with Sander-Grinder (9) at right. 1x42 in. Aluminum oxide.

GRIT, ORDER INFO: Pkg. of 3 belts.

9 HT 26056—Fine. Wt. 6 oz.\$1.99

9 HT 26055—Medium. Wt. 6 oz.1.99

9 HT 26054—Coarse. Wt. 7 oz.1.99

(10) 8-inch Sanding Disc Attachment

Aluminum sanding disc, 4 1/2 x 12-in. table tilts for bevel sanding. Has miter groove for use with miter gauge (11) below.

ORDERING INFORMATION:
9 HT 22563—Wt. 14 pounds\$19.99

(11) Miter Gauge for (10)

Steel and aluminum. Locks at any angle. Use for angle and bevel sanding.

ORDERING INFORMATION:
9 HT 22574—Wt. 1 lb. 10 oz.\$7.50

(12) Steel Leg Set. Has rubber padded leveling feet. Top 21 1/2 x 16 inches.

ORDERING INFORMATION: Unassembled.
9 HT 22239C—Wt. 25 lbs.\$29.99



Grinds metal pieces smoothly and accurately

Sanding Disc Attachment can sharpen tools


\$129.95

without disc attachment (10) miter gauge (11) or steel legs (12)

10

11

12

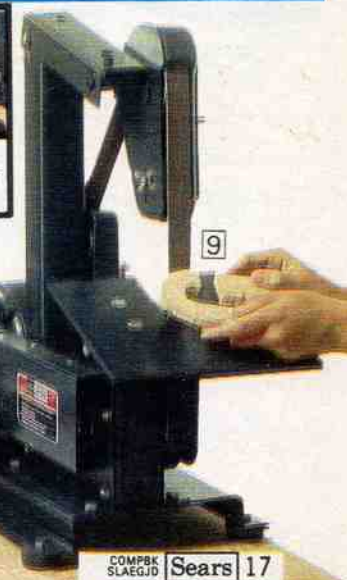

COMPK SLAEGJD Sears 17

Hobby Tools

Add a professional touch to your craft

1

CRAFTSMAN® Scroll Saw-Sander \$58.99

For intricate scrollwork on small work pieces. Cut wood, plastic and non-ferrous metal to 1 1/2 in. thick. Blade turns 45° to the left or right.

MOTOR AND BEARINGS: Ball-bearing motor runs at 3450 strokes per minute and transfers power to blade without V-belt.

TABLE: Steel construction; 8x9 1/2 in. with 1/2-in. grid. Locking table tilts to 45° right or left for bevel cuts.

CONSTRUCTION: Steel body and throat. 15-inch throat depth.

ACCESSORIES: Includes 4-in. disc sander, four 3-in. pin-end blades, self-adjusting blade guard.

ELEC. INFO: 80 w.; 110-120-v., 60-Hz. AC. UL listed. 5-ft., 3-wire cord.

ORDER INFO: See warranty on pg. 35. Wear safety goggles, see pg. 75.

9 HT 2472C—Wt. 17 lbs. ... \$58.99

(2) Accessory Kit

KIT INCLUDES: Flexible 30-in. shaft attaches to power take-off for fingertip control. With 5 blades, 3 sanding discs; drum sander; 3 extra bands; 2 grinding wheels, drill bit, high-speed cutter, 2 bristle brushes, polishing compound, buffing wheel, 3 collets, wrench.

ORDER INFO: Wt. 1 lb. 8 oz.

9 HT 2471 Kit \$21.49

Hobby Lathe \$40.99

9

(10) Steel-tipped Chisel Set

COMPOSITION: Four chisels; 30° angle, 60° angle, round-end tool, parting tool. All with wooden handles.

ORDERING INFO: Wt. 8 oz.

9 HT 25145 Set \$9.99

Alloy-steel Jig Saw Blades

3 4 5 6 7 8

(3 thru 8) CRAFTSMAN Alloy-steel Jig Saw Blades

Heat treated, 6-inch plain-end blades snap off to fit saws taking shorter plain-end blades. Use only designated blades for metal cutting, lubricate blade with beeswax. Sabre-saw blades can be used on jig saws for heavy work. Package of five.

TYPES, USES, SIZES AND ORDERING INFORMATION:

Item	Catalog Number	Length in.	Width in.	Thick. in.	Teeth per in.	Use for	Wt. oz.	Per pkg.
Pin-type blades								
(3)	9 HT 26877	3	.065	.010	25	Wood, fine cut	2	75c
	9 HT 26878	3	.187	.015	15	Wood, fast cut	2	89c
	9 HT 26871	4	.065	.010	18	Wood, plywood	2	49c
(4)	9 HT 26873	5	.110	.020	15	Wood or metal	3	65c
	9 HT 26881	6	.110	.020	15	Wood or metal	2	89c
Plain-end Blades (for most jig saws)								
	9 HT 26874	5	.110	.020	15	Wood or metal	3	75c
	9 HT 26883	6	.110	.020	15	Wood, fine metal	3	89c
(5)†	9 HT 26885	6	.110	.020	10	Wood, coarse metal	3	89c
(6)	9 HT 26884	6	.110	.020	20	Thin sheet metals, including steel	3	89c
For use with former 9-2072N as sabre saw								
(7)*	9 HT 26888	6	.250	.028	20	Wood and metal	3	\$1.15
(8)	9 HT 26887	6	.187	.028	10	Wood, soft metal	3	1.15

†Blade (5) narrower than shown

*Blade (7) wider than shown

(9) Hobby Lathe. Can turn wood, plastic and soft non-ferrous metals.

MOTOR, BEARINGS: Ball-bearing motor develops no-load speed of 3450 rpm.

CONSTRUCTION: High-impact plastic housing. Built-in drive center shaft lock lets you remove and attach headstock easily.

TURNING CAPACITY: 1 1/2-in. diam. stock. Maximum length: 6 in. between centers.

ACCESSORIES: Incl. tail, headstock centers, tool support, spanner wrench; lathe chisel set sold separately at left.

ELECTRICAL INFO: 115-volt, 60-Hz. AC. 100-watts. UL listed. 6-ft. 3-wire cord.

ORDERING INFORMATION: Protect your eyes ... wear safety goggles; see page 75.

9 HT 25141—Wt. 6 lbs. 2 oz. \$40.99

(15) Craft Tool Set

SET COMP.: 2 knives, aluminum, grooved plastic handles, 8 assorted blades of high-carbon steel, block planer, tweezers, razor saw blade, screwdriver. Plastic case.

ORDER INFORMATION: Shipping weight 1 pound 8 ounces.

9 HT 52676 Set \$11.79

(16) 29-pc. Knife, Tool Set

SET COMP.: 2 aluminum handles, 1 grooved plastic handle, 11 assorted blades, 4 gouges, 4 routers, saw blade, 3-in. blade, planer, sander, spoke shave, balsa stripper, wooden storage case.

ORDER INFORMATION: Shipping weight 2 pounds 3 ounces.

9 HT 52686 Set \$19.89

Deluxe Carving Chest

(not shown). **SET COMPOSITION:** Grooved plastic handle, 8 assorted blades made of high-carbon steel. 6 gouges, 4 routers. Plastic case.

ORDERING INFO: Shpg. wt. 1 lb. 3 oz.

9 HT 52675 \$8.79

(17) Whittler's Set

SET COMPOSITION: 6 special woodcarving handles, fitted with assorted carving blades of high-carbon steel. Plastic case.

ORDERING INFO: Shpg. wt. 15 oz.

9 HT 52613 Set \$16.89

All-purpose Hobby Center



Rotary Hobby Shaper

12



Li'l Crafty® Deluxe Rotary Hobby Tool Kit

13




CRAFTSMAN® 14-piece Rotary Hobby Tool Kit

14



X-Acto Tool, Knife Chest For the serious hobbyist



18 Sears COMPBK LAEGJD

For wood, plastic, paper or soft metal hobby projects.

CONSTR.: Blades and components are of high-carbon steel. Wooden carrying case.

SET COMPOSITION: 4 routers, 4 gouges, 8 refill blades, razor saw blade, coping saw, block planer, tweezer, 2 knives (Nos. 1, 5), pliers, hammer set, hand drill, contoured sander set, file handle, 3 needle files, bench vise, 2 "C" clamps, heat sink, 2 screw-drivers, pin vise, 2 drill bits, chuck adapter, instructions.

ORD. INFO: Wt. 6 lbs. 8 oz.

9 HT 52689 Set \$59.00

X-Acto® Knife Sets

15



17

Versatile Hobby Kits for home projects

Carve intricate designs in wood pieces Sand work pieces for smooth finishes Polish metal and jewelry projects

(11) All-purpose Hobby Center. A compact, versatile tool... use as both a bench and hand grinder. Sand, polish, carve, shape, etc. MOTOR, BEARINGS: Bench grinder has variable speed, 1000 to 4500 rpm; hand grinder has variable speed, 7000 to 25,000 rpm. Ball-bearing motor powers unit.

HOUSING: High-impact plastic housing. Base unit, 5x6 1/4x9-in. high. KIT INCLUDES: 9 emery wheels, 1 dressing stone, 2 arbors, 3 polishing wheels, 2 rotary files, 4 cutting wheels, 1 drum sander attachment, 3 sanding drums, 10 sanding discs, 2 bristle brushes, 1/8-in. collet, 1/8-in. drill bit, 2 double-ended wrenches, allen wrench. Small parts tray and adjustable tool rest.

ELECTRICAL INFO: 120 volts, 300 watts, AC. UL listed. 60-Hz. 6-foot, 2-wire cord, double-insulated.

ORDERING INFO: Wear safety goggles, see p. 75.
9 HT 25156—Shipping weight 8 lbs. \$68.99

(12) CRAFTSMAN Rotary Hobby Shaper. Has flexible shaft and swivel base. Shaft connects to slim-grip handpiece... ideal for hard-to-reach spots. You can grind, polish, slot, deburr, sand, carve, sharpen, rout, cut and engrave. For wood, plastics, gems, leather, metal.

MOTOR: Develops no-load speed of 25,000 rpm.

CONSTRUCTION: High-impact plastic housings. Detachable, 360 swivel base... mounts on bench or wall with hanger bracket, included. Vinyl covered shaft, 34 inches long.

ACCESSORIES: Includes collet, instructions. Motor speed control and accessories sold below.

ELECTRICAL INFORMATION: Operates on 115-volt, 95-watt, 60 Hz. AC. UL listed. Six-foot, 3-wire cord.

ORDER INFO: See warranty, p. 129. Safety goggles p. 75.
9 HT 25143—Shipping weight 4 lbs. 6 oz. \$58.99

(13) L'I'l CRAFTY 29-pc. Rotary Hobby Tool Kit. Grind, polish, slot, deburr, carve, sharpen, rout, cut, engrave. For wood, gems, leather, etc. Motor develops no-load speed of 24,000 rpm.

HOUSING: Strong, lightweight plastic housing. 8 in. long. With hanging hook for easy storage.

KIT INCLUDES: 2 mandrels, 2 steel cutting burs, 5 abrasive points, 1 drum sander, 1 dressing stone, 4 bands for sander, pumice wheel, 1 simulated ruby crystal wheel, 5 separating discs, 1 wire brush, felt buff wheel, 1 rubber abrasive wheel, 1 muslin buff, collet. Perma-nex polyethylene carrying case. Takes accessories with 1/8 or 3/32-inch shafts.

ELECTRICAL INFORMATION: 110-120 v., 60 Hz. AC. 88 watts. UL listed. 6-foot, 3-wire cord.

ORDERING INFORMATION: See warranty on page 129... wear safety goggles, see page 75.

9 HT 25175—Shipping weight 3 pounds \$38.99

(14) CRAFTSMAN 14-piece Rotary Hobby Tool Kit. Sand, polish, carve, shape. Motor develops no-load speed of 30,000 rpm. HOUSING: Strong, lightweight plastic housing. Compact size.

KIT INCLUDES: 3 cutting wheels, 1 chuck wrench, 3 sanding discs, 1 polishing wheel, 1 emery wheel point, 2 mandrels, 1 silicon-carbide grinding wheel and 1 high-speed drill bit with 1/8-in. shank.

ELECTRICAL INFO: Incl. 6-foot, 3-wire cord. 115-volt, 60-watt, 60-Hertz, AC. UL listed.

ORDERING INFORMATION: See warranty on page 129... wear safety goggles, see page 75.

9 HT 25171—Shipping weight 1 lb. 10 oz. Kit \$26.99

Motor Speed Control for (12) thru (14) above

ELECTRICAL INFORMATION: 120-v., 60 Hz, AC. UL listed 6-ft., 3-wire cord.

ORDERING INFORMATION:

9 HT 25144—Shpg. wt. 2 lbs. 1 oz. \$19.49



(18 thru 40) Accessories for L'I'l CRAFTY Hobby Tool Kit and Rotary Hobby Tools.

SIZES AND ORDERING INFORMATION:

Key	Catalog Number	Description	Size (inch)	Wt. oz.	Price
(18)	9 HT 25104	Cup Bristle Brush	3/8 shank	2	89c
(19)	9 HT 25105	Mandrel	3/8 shank	2	89c
(20)	9 HT 25106	Mandrel	1/8 shank	2	89c
(21)	9 HT 25119	Circular Burr	3/8 shank	2	\$1.99
(22)	9 HT 25113	Bud Burr	3/8 shank	2	1.99
(23)	9 HT 25114	Cylinder Burr	3/8 shank	2	1.99
(24)	9 HT 25167	Abrasive Cone	1/8 shank	5	89c
(25)	9 HT 25186	Abrasive Ball	1/8 shank	6	89c
(26)	9 HT 25122	Abrasive Disc	1/8 shank	2	89c
(27)	9 HT 25123	Abrasive Disc	1/8 shank	2	89c
(28)	9 HT 25124	Abrasive Cyl.	1/8 shank	2	89c
(29)	9 HT 25125	Dressing Stone	3/8x3/8	2	89c
(30)	9 HT 25121	Abrasive Cone	1/8 shank	2	89c
(31)	9 HT 25159	Drum Sander	3/8 shank	6	\$1.69
(32)	9 HT 25164	Bands for (31)	1/4 diam.	5	89c
(33)	9 HT 25111	Felt Buff	3/8 diam.	2	89c
(34)	9 HT 25109	Circular Saw	3/8 diam.	2	\$1.69
(35)	9 HT 25117	Wheel Pumice	1/8 diam.	2	89c
(36)	9 HT 25116	Abrasive Wheel	1 diam.	2	\$1.29
(37)	9 HT 25107	Rubber Wheel	3/8 diam.	2	89c
(38)	9 HT 25108	Separating Discs	1/8 diam.	2	89c
(39)	9 HT 25103	Wheel Brush	3/8 shank	2	\$1.29
(40)	9 HT 25102	Rag Buff Wheel	1 diam.	2	89c



*Pkg. of 2. *Pkg. of 3. *Pkg. of 10 (5 med.; 5 coarse)

CRAFTSMAN® Variable-speed Rotary Grinder and Accessory Kit



Grinder alone
\$69.50

Grinder and Kit
\$79.50

Variable-speed Rotary Grinder alone.

For grinding metal, wood, plastic.

MOTOR, BEARINGS: Permanent magnetic motor develops max. 1/4 HP. Variable-speed dial for adjusting speeds from 13,000 to 24,000 (no-load speeds). Permanently lubricated ball bearings.

CHUCK: Two collet-type chuck grips 1/8, 1/4-inch diameter shank.

HOUSING: Lightweight aluminum, heat-resistant polyester housing... contoured to fit hand. 10-in. long.

ELECTRICAL INFO: Double-insulated... needs no grounding. 110-120-v., 264-w., 60 Hz, AC. UL listed.

Includes 6-ft., 2-wire neoprene cord.

ORDER INFO: Warranty on page 129.

Wear safety goggles, see page 75.

9 HT 1734—Shpg. wt. 5 lbs. \$69.50

Grinder as above, except no-load speed of 24,000 rpm.

9 HT 1733—Wt. 4 lbs. 12 oz. \$59.50

20-piece Variable-speed Rotary Grinder Kit. Grinder above plus 9 grinding points, 3 rotary rasps, 3 rotary files, wrench, collet (not shown). Perma-nex case. 12 1/2x9x4 1/2 inches high.

ORDER INFO: See warranty on pg. 129.
9 HT 17342—Wt. 8 lbs. Kit \$79.50

Individual Cutters and Points for Rotary Grinders

(41 thru 46) Individual CRAFTSMAN Rotary Cutters.

High-speed steel, Type M-2. For wood, plastic and metal (except hardened steel). 1/4-inch shanks. Meets Federal Specifications GGG-F-00340 for hardness and accuracy.

ORDERING INFORMATION:

Shipping weight each 3 oz.

Key	Catalog Number	Diam.	Shape	Price
(41)	9 HT 2966	1/4 in.	Cylindrical	\$2.49
(42)	9 HT 2967	1/4 in.	Spherical	2.49
(43)	9 HT 2970	3/8 in.	Tree pointed	3.49
(44)	9 HT 2968	3/8 in.	Elliptical	3.49
(45)	9 HT 2971	1/2 in.	Conical	2.49
(46)	9 HT 2969	1/2 in.	Tree Radius	2.49

(50 thru 56) CRAFTSMAN Solid Carbide Burs.

Harder than plain steel. 1/8-in. shanks.

ORDERING INFORMATION:

Wt. ea. 2 oz. Ea. \$3.69

Key	Catalog No.	Shape
(50)	9 HT 25842	Tree shape
(51)	9 HT 25841	Cylindrical
(52)	9 HT 25843	Conical
(53)	9 HT 25846	Tree Shape
(54)	9 HT 25845	Ball shape
(55)	9 HT 25844	Cylindrical radius

6-pc. Burr Set. Includes (50) thru (55) shown above.

ORDER INFO: Save \$3.26. Separate prices total \$22.14.

9 HT 2561—Wt. 4 oz. \$18.88

Set of 9 assorted mounted Grinding Points. Heads of vitrified aluminum oxide. For grinding, polishing, deburring. Sizes to 1-in. diam., 1/2 to 1 1/4 in. long. Also 1-in. diam. spherical points, 1/4-in. shank.

9 HT 6471—Wt. 14 oz. Set \$4.99

(56 thru 60) Individual Mounted Grinding Points. Vitrified aluminum oxide heads mounted on 1x1/4-in. steel shafts. For fin, die cutting.

ORDERING INFORMATION:

Each 59c

Key	Catalog No.	Diam.	Length	Wt.
(56)	9 HT 64714	1/2 in.	1 1/2 in.	3 oz.
(57)	9 HT 64719	1 in.	1 in.	4 oz.
(58)	9 HT 64717	1 in.	1 1/2 in.	4 oz.
(59)	9 HT 64716	3/4 in.	1 1/8 in.	4 oz.
(60)	9 HT 64713	3/8 in.	1 in.	3 oz.

(61) Stand and Holder. Measures overall 4 1/2x2x5 inches long.

ORDERING INFORMATION: For rotary grinder above right.

9 HT 25848—Shipping weight 4 pounds 8 ounces \$24.99

Protect valuable possessions by engraving them with your name, social security or driver's license number, etc. ... contact local law enforcement authorities for their recommended method.

HOUSING, TIP: Break-resistant Lexan plastic housing. Tungsten carbide tip for marking glass, plastic, brass. Knob adjusts length of stroke.

MOTOR, SWITCH: .15 amp motor delivers 7200 strokes per minute. Slide-action on-off switch.

ELEC. INFO: 110-120 v., 20-w., 60-Hz, AC. UL listed.

ORDERING INFO: See warranty on page 129.

9 HT 4297—Shipping weight 1 lb. 1 oz. \$13.99

9 HT 52839—Replacement Tip. Wt. 3 oz. 2.49

Sears electric engraver (not shown) has hardened steel tip for use on wood, plastic, soft metals. .080 amp motor. No on-off switch.

ORDERING INFORMATION: See warranty on page 129.

9 HT 4290—Shipping weight 13 ounces \$7.99

9 HT 52835—Replacement Tip. Wt. 2 oz. 1.59


CRAFTSMAN
Electric
Engraver
\$13.99



COMPKR SLAEJSD Sears 19

Whatever the job... your CRAFTSMAN® Table Saw or Radial Saw can do more with these Accessories

YOU CAN DO MORE...

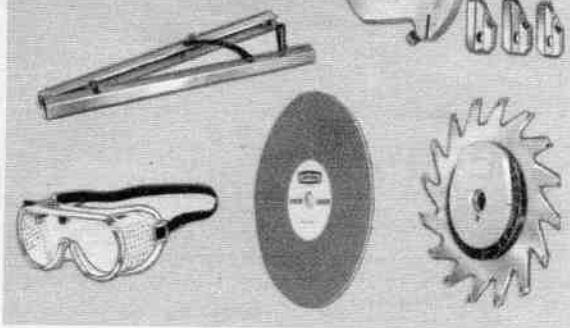


CRAFTSMAN® Accessory Kit for Table Saws

Save \$14.92 Sep. prices total \$74.91 **\$59.99**

KIT INCLUDES: Adjustable Dado (9HT3263) keyed (1) on p. 23. Fits 9, 10 or 12-in. table saws with 3/4-in. round arbors. 7-in. diameter with 16 teeth. Dadoes up to 1 1/2 in. deep and 1 1/16 in. wide. Adjustable hub lets you dial width without removing dado. Triple-cutter Molding Head (9HT3214) on p. 23. Fits 9, 10 or 12-in. table saws with 3/4 or 1-in. round arbors... 7-in. diameter. Four Cutter-bit Sets: 3-pc. Cabinet Door Lip (9HT2353) keyed (A) on p. 23; 3-pc., 3-bead (9HT2352) keyed (D) on p. 23; 3-pc., 3/16-in. Cove and Bead (9HT3212) keyed (E) on p. 23; "Ogee" Window and Door Stop keyed (P) on p. 23. Taper Jig (9HT3233) keyed (6) on p. 20. Lets you cut tapers up to 3 in. per foot or 15°. 8-in. Sanding Wheel (9HT2274) on p. 21. Two medium-grit sanding surfaces; one flat, one with 2" taper. Fits 3/4 or 1/2-in. arbors. Flexible Mask Goggles (9HT1859) keyed (13) on page 75. Fit over personal glasses... elastic strap adjusts.

ORDERING INFORMATION:
9 HT 32783C—Shipping weight 10 pounds.....Kit \$59.99

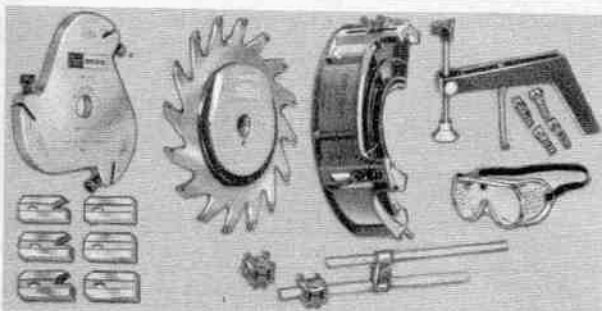

CRAFTSMAN® Accessory Kit for Radial Saws

Save \$17.93 Sep. prices total \$77.92 **\$59.99**


KIT INCLUDES: Adjustable Dado (9 HT 3263) keyed (1) on p. 23. Fits 9, 10 or 12-in. radial saws with 3/4-in. round arbors. 7-in. diameter with 16 teeth. Dadoes up to 1 1/2 in. deep and 1 1/16 in. wide. Triple-cutter Molding Head (9 HT 3214) on p. 23. Fits 9, 10 or 12-in. radial saws with 3/4 or 1-in. round arbors... 7-in. diameter. Two Cutter-bit Sets: 3-piece Cabinet Door Lip (9 HT 2353) keyed (A) on p. 23; 3-piece, 1-in. Planer and Jointer (9 HT 2302) keyed (F) on p. 23. Exclusive Stop-length Gauge (9 HT 3242) keyed (23) on p. 21. Lets you make repetitive cuts. Exclusive Hold-down Clamp (9 HT 29502) keyed (22) on p. 21... holds square or round stock firmly. Molding Head/Dado Guard (9 HT 29524) described below. Flexible Mask Goggles (9 HT 1859) keyed (13) on p. 75. Fit over personal glasses... elastic strap adjusts.

ORDERING INFORMATION:
9 HT 32781C—Shipping weight 10 pounds.....Kit \$59.99


Adaptor (not shown). Lets your saw drill or rout with bits with 1/4-inch shanks. Fits arbor with 1/2x20-thread accessory ends.
ORDERING INFORMATION:
9 HT 3239—Shipping weight 4 ounces.....\$2.49

Molding Head/Dado Guards (shown in kit above). Must be used with dado blades or molding cutters when radial saw spindle is positioned vertically.

SIZES, ORDERING INFO: Not for former saw 9-2922.
9 HT 29524—For up to 7-in. diam. Wt. 1 lb. 1 oz.....\$9.99
9 HT 29523—For up to 8-in. diam. Wt. 1 lb. 8 oz.....9.99



Multi-purpose Jig fits on all table saw fences



Universal Jig



(4) CRAFTSMAN Miter Gauge with positive stops at 90° and 45°

Fits most table saws with 3/4x3/4-inch deep miter grooves. Gives you accurate settings with positive stops at 90° and 45°, right, left. CONSTR.: Die-cast, accurately machined aluminum head. Steel degree indicator.

ORDERING INFO: Order hold-down clamp (3) below, left and stop rods (5) below separately. Not for former saw 9-2413C.
9 HT 29929—Wt. 3 lbs. 2 oz.....\$15.99

(1) New at Sears... CRAFTSMAN Multi-purpose Jig

Fits over fence of all table saws.

USES: For tenons and regular cuts. Has 45° slot for checking blade tilt at that angle. Measures wood or blade height in 1/4-inch increments on graduated scale. Attach wood (not included) on side for mortises and tenons.

CONSTRUCTION: High-impact plastic.

ORDERING INFORMATION:

9 HT 32778—Shpg. wt. 1 lb. 2 oz. ...\$6.99

(2) CRAFTSMAN Universal Jig

Fits 3/4-in. wide x 3/8-in. deep miter groove.

USES: For regular cuts, dadoes and joints such as tenons or open mortises. For material up to 2 inches thick.

CONSTRUCTION: Includes two steel plates and two steel clamps with carbide-tipped, 8-tooth, 8-inch blade.

ORDERING INFORMATION:

9 HT 3235—Shpg. wt. 5 lbs. 12 oz. ...\$24.99

(3) Hold-down Clamp for miter gauge (4)

Also for most Craftsman miter gauges except those included with saws (9-24151 and 9-2415C).

USES: For all types of bevel and miter cuts. Clamps stock firmly to miter gauge.

CONSTRUCTION: Made of steel.

ORDERING INFORMATION:

9 HT 29928—Shpg. wt. 1 lb. 12 oz. ...\$13.50

(5) Stop Rods for miter gauge (4)

CONSTRUCTION: Made of steel.

ORDERING INFORMATION: Not for saw 9-24151 or 9-2415C.

9 HT 29924—Shpg. wt. 15 oz.....\$4.50

(6) CRAFTSMAN Taper Jig

Tapers up to 3 inches per foot or 15°. Allows you to duplicate taper ripping.

CONSTR.: Extruded aluminum with locking brackets, handle and scale in degrees of taper and inches per foot for accurate work.

ORDERING INFORMATION:

9 HT 3233—Shpg. wt. 2 lbs. 4 oz.\$8.99

(7) Table Saw Guard Assembly

CONSTRUCTION: Clear plastic, aluminum.


ORDERING INFO: Fits former 9-2990, 9-2991N, 9-2992N, 9-2994N, 9-2999N.

9 HT 29906—Shpg. wt. 4 lbs.\$19.99


Radial Saw Accessories




Buffing Wheel



Sanding Drum



Blade Guard



Key Chuck

(12) CRAFTSMAN Buffing Wheel

CONSTRUCTION: 8-inch diameter. Spiral-sewed muslin, raked edges. Thirty layers thick. 64x64 threads per inch. Fits 1/2 and 3/8-inch shafts.

ORDERING INFORMATION:

9 HT 64932—Shpg. wt. 8 oz.....\$2.49

(13) Sanding Drum

CONSTRUCTION: 3-inch high face, 2 1/4-inch diameter. For 1/2-inch x 20-thread shaft. Medium-grit sanding sleeve over expandable rubber drum. Not for use on drill presses.

ORDERING INFORMATION: Order replacement sanding sleeves on page 117.

9 HT 25246—Shpg. wt. 1 lb. 1 oz.\$5.50

(14) Automatic Carriage Return

CONSTRUCTION: Returns carriage to rear of arm after cutting. For 10 and 12-inch radial saws except 9-2945 and 9-23161.

ORDERING INFORMATION:

9 HT 2956—Shpg. wt. 1 lb. 6 oz.\$16.49

(15) Miter Vise

Double-jaw vise holds molding or frame sections up to 3 inches wide. Ideal for making picture, door or window frames.

CONSTRUCTION: Cast-aluminum base and jaws. Steel screws. Holds wood or metal firmly. Fits most radial saws.

ORDERING INFORMATION:

Shipping weight 2 pounds.
9 HT 3279.....\$11.99

(16) Floating Ring Guard

Provides additional protection to operator from sides of blade when not cutting. For former radial saws 9-2933, 9-2934, 9-2941, 9-2943, 9-2944.

ORDERING INFORMATION:

9 HT 29007—Shpg. wt. 1 lb. 7 oz. ...\$11.49

Floating Ring Guard

As (16) above, but for former radial saws 9-2945 and 9-2946.

ORDERING INFORMATION:

9 HT 29008—Shpg. wt. 1 lb. 7 oz. ...\$12.49

(17) Retractable Lower Blade Guard

CONSTRUCTION: Clear-view plastic. Aluminum frame. Fits 10-inch radial saws 9-2311, 9-2316, 9-2310, 9-1976, 9-1977 only.

ORDERING INFORMATION:

9 HT 29009—Shpg. wt. 1 lb. 5 oz. ...\$13.49

(18) Key Chuck

Converts radial saw into on-the-spot drill or router. Simply screw on chuck, insert bits.

CONSTRUCTION: Hardened steel. Nickel-chrome alloy jaws. Keyholes do not extend into body cavity... keep dirt out. Takes bits with shanks from 3/4 to 1/2-inch diameter.

Chuck fits 1/2x20-threaded ends. Also includes chuck key for locking and releasing drill and router bits.

ORDER INFO: Order drill bits on pages 118 and 119, router bits on pages 132 and 133.

9 HT 2980—Shpg. wt. 1 lb.\$7.99

Accessories

Table Saw
Extensions



(8) Table Saw Inserts

Dado Insert

SIZES, CONSTRUCTION, ORDERING INFO:

For 12-in. saws 9-2418, 9-29913, 9-2993. Steel . . . adjustable to table surface. For 8-in. dado head.
9 HT 29935—Shpg. wt. 1 lb. 10 oz. \$6.99
For 8-in. saws 9-2428, 9-24282. Steel . . . adjustable to table surface. For 6-in. dado head.
9 HT 29937—Shpg. wt. 1 lb. \$6.49
For 7½-in. saws 9-2421C, 9-2413C, 9-2415, 9-24151. Aluminum . . . no adjustment necessary. For 6-in. dado head.
9 HT 24211—Shpg. wt. 5 oz. \$3.50

Molding Insert

SIZES, CONSTRUCTION, ORDERING INFO:

For 8-in. saws 9-2428, 9-24282. Steel . . . adj. to table surface. For ¾ and 5/8-in. molding heads.
9 HT 29938—Shpg. wt. 15 oz. \$6.49
For 7½-in. saws 9-2421, 9-2413, 9-2415, 9-24151. Aluminum . . . no adjustment necessary. For 5/8-in. molding head.
9 HT 24212—Shpg. wt. 5 oz. \$3.50

Combination Dado-Molding Insert

Steel . . . adjustable to table surface. For 7-in. dado and 7-in. molding heads.

SIZES AND ORDERING INFORMATION:

For 12-inch saws 9-2418, 9-29913, 9-2993.
9 HT 29995—Shpg. wt. 1 lb. 10 oz. \$7.49
For 10-inch saws 9-2990, 9-2994, 9-2996, 9-29911, 9-29912, 9-29904, 9-29914.
9 HT 29994—Shpg. wt. 1 lb. 15 oz. \$7.49
For 10 and 9-inch saws 9-2404, 9-24042, 9-2958, 9-29582, 9-2419, 9-24192.
9 HT 29933—Shpg. wt. 2 lbs. 2 oz. \$7.49
For 9-in. saw 9-2414. For 9-in. saws 9-2411, 9-24114. Wt. 2 lbs. 2 oz.
9 HT 29934 . . . \$4.49 9 HT 24213 . . . \$3.99



Rotary Surface Planer



Sawdust Collector

(19) Rotary Surface Planer

Lets you smooth rough, uneven work surfaces and edges. Also removes paint and varnish, eliminates bows from warped stock.

CONSTRUCTION: Die-cast aluminum body with air-flow design. Three carbide-tipped alloy steel blades plane up to a 4-inch path. Fits radial saws with ¾-inch arbors.

ORDER INFO: Not for radial saw 9-2922.
9 HT 29513—Shpg. wt. 1 lb. \$15.99

Extra 3-piece Blade Set for (19) above

9 HT 29531—Shpg. wt. 3 oz. Set \$5.99

(20 and 21) CRAFTSMAN Sawdust Collectors

Fit all Craftsman radial saws, most other popular saws. Help keep work area and air clean.

(20) Stationary Sawdust Collector

High-impact plastic shroud traps sawdust, wood chips, funnels them down chute at bottom of shroud. Just place bag or box beneath to gather debris or, for more complete pick-up, attach to shop vac with 2½-inch diameter hose.

ORDERING INFORMATION:

9 HT 29517C—Shpg. wt. 7 lbs. . . Kit \$22.99

(21) Adjustable Sawdust Collector

For more effective dust pick-up than other collectors because it adjusts to blade angle for operations such as miters, bevels, crosscuts. High-impact plastic, steel. Adapters to attach shop vacs with 1¼ or 2½-in. diameter hose.

ORDER INFO: Also for bench-mounted lathe.

9 HT 16998—Shpg. wt. 2 lbs. 1 oz. . . \$15.99



(9) Table Saw Extensions

Mounts either side of table saw. Formed steel. Attaching hardware included.

SIZES AND ORDERING INFORMATION:

10x20 inches. Fits saws 9-2914, 9-2411, 9-24114, 9-2419, 9-24192, 9-2404, 9-24042, 9-2958, 9-29582. Order adapter kit below to fit saws 9-2428, 9-24281, 9-24282.
9 HT 29954—Wt. 10 lbs. 8 oz. . . . \$19.99

10x27 inches. Fits saws 9-29912, 9-29914, 9-29904, 9-2418. Order adapter kit separately below to fit saws 9-29911, 9-2994, 9-2996, 9-2993, 9-2995, 9-2997, 9-29913.
9 HT 29957C—Shpg. wt. 15 lbs. . \$19.99

Saw Adapter Kit for extensions above

ORDERING INFORMATION:
9 HT 29999—Shpg. wt. 1 lb. . . Kit \$4.49

(10) 20-inch Adjustable Extension

Increases work space by up to 400 square inches for big cutting tasks.

ORDER INFO: Fits all Craftsman table saws except 9-2415, 9-24151, 9-2413, 9-2419, 9-24192, 9-2958, 9-29582.

9 HT 2178—Shpg. wt. 12 lbs. . . \$19.99

(11) CRAFTSMAN Power Tool Handbook. Features instructions on use of table saw. Includes chapters on standard saw operations, dado, molding and sanding operations. Also sections on band saw, drill press, wood lathe, wood shaper, stationary sander and planer. Over 600 operations described. 207 pages.

ORDERING INFORMATION:
9 HT 2918—Shpg. wt. 14 oz. . . . \$5.99



Only at Sears . . . Hold-down Clamp holds square or round stock firmly.



Only at Sears . . . Stop-length Gauge for repetitive cuts



CRAFTSMAN Power Tool Handbook

(22) Hold-down Clamp

Exclusive at Sears. Remove a few screws from your radial saw work table. Install hooks into existing holes. To use, simply catch foot of clamp in one of the hooks, position clamp over work and tighten . . . workpiece is held firmly. Holds even round stock. With clamps, hooks.

ORDERING INFO: For radial saws only.
9 HT 29502—Shpg. wt. 1 lb. 7 oz. . . . \$9.99

(23) Stop-length Gauge


Exclusive at Sears. For repetitive cuts. Attach permanent clamps to ends of radial saw work table. Insert ¾-inch dowel rod (not included) thru permanent clamp and bottom of adjustable clamp . . . tighten. Slip a second dowel thru top of adjustable clamp, set to desired width and tighten. To use, just butt workpiece against dowel. Includes one adjustable clamp and two permanent clamps.

ORDERING INFO: For radial saws only.
9 HT 3242—Shpg. wt. 1 lb. 2 oz. . . . \$4.99


(24) CRAFTSMAN Power Tool Handbook. Features instructions for use of radial saw. Includes chapters on special as well as standard operations, use of accessories. With additional sections on the use of the band saw, drill press, wood lathe, wood shaper, stationary sander, stationary planer and how to sharpen your tools. Fully-illustrated section on how to make 32 different wood joints. Over 600 professional operations described. 224 pages.

ORDERING INFORMATION:
9 HT 2917—Shpg. wt. 15 oz. . . . \$5.99

Accessories for both Radial and Table Saws



Attach to radial saw



Attach to table saw

Blade Sharpener . . . \$2999 attaches directly to saw

Handles reshaping, retreating and jointing. For table or radial saws with ½, ¾, 1 or 1-in. round arbors. Mounts, removes easily. Sharpens regular blades up to 12-in. diam. Grinding wheel 60-grit, measures 6¼x5½-in.

ORDER INFO: Not for carbide-tipped or disposable blades.
9 HT 3532—Shipping weight 5 pounds . . . \$29.99

Replacement Grinding Wheel for sharpener above

9 HT 35321—Shipping weight 14 ounces . . . \$6.99

Blade Setting Tool

Use to alternately set teeth on 4 to 16-in. circular saw blades . . . allows uniform beveling of teeth. To operate . . . place blade on stud, adjust beveled anvil for desired set, strike set punch. Set angle on blade before sharpening. Use with blade sharpener above or 9-23393 sold on page 24. Mount on work table or bench. Turned steel, cast iron.

ORDER INFO: Not for carbide-tipped or disposable blades.

Shpg. wt. 6 lbs. 8 oz.
9 HT 23391 . . . \$59.99



\$5999

Sanding Wheels and Discs

10-inch Sanding Wheel. Attach to table or radial saw. Tempered steel casting. Coarse grit on one side, medium grit on other. Fits ¾ or 1-inch arbors.

ORDER INFO: Wt. 3 lbs. 14 oz.
9 HT 22723 . . . \$6.99

8-inch Sanding Wheel. Attach to table or radial saw. Aluminum casting. One flat side, other 2° taper. Med. grit, both sides. Fits ¾, 1/2-inch arbors. Removes stock fast with little clogging.

ORDER INFO: Wt. 1 lb. 2 oz.
9 HT 2274 . . . \$4.99

Replacement Sanding Discs for above. 3-inch center hole. Package of 6: 2 each of fine, medium, coarse. Use disc cement.

ORDER INFO: Package of 6.
9HT22731-10-in. Disc. Wt. 13 oz. Ea. Pkg. \$2.19; . . . 5 for \$10.50
9 HT 22732-8-in. Disc. Wt. 9 oz. Ea. Pkg. \$1.49; . . . 5 for \$6.50



CRAFTSMAN® Blade Stabilizers

Use with carbide-tipped blades and most regular blades from 7 to 10 in. diam. Helps them cut smoother. Tempered steel. One side taper-ground, other flat-ground. Stabilizer is 4 in. diam. Center hole knockout bushed for ¾ to 1½-in. arbors. Pkg. of 2.

ORDER INFO: Wt. 1 lb. 6 oz.
9 HT 4952 . . . Package \$4.99



2 in pkg. \$499




See more Accessories on the following 4 pages

CRAFTSMAN® Steel Stands and Leg Sets

They provide a sturdy work platform and reduce power tool vibration thanks to 18-gauge steel, double-braced construction, and rigid motor mounts... they have adjustable rubber-padded leveling feet, too

Stands

For radial, table, and band saws; shapers, and belt-disc sanders

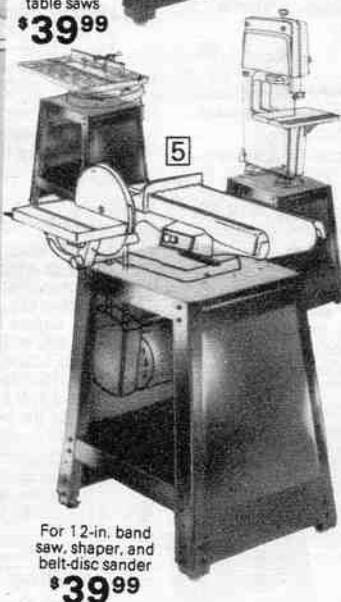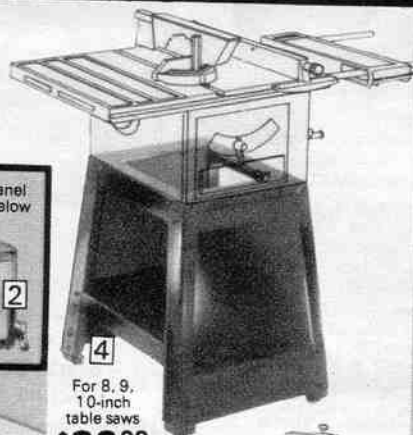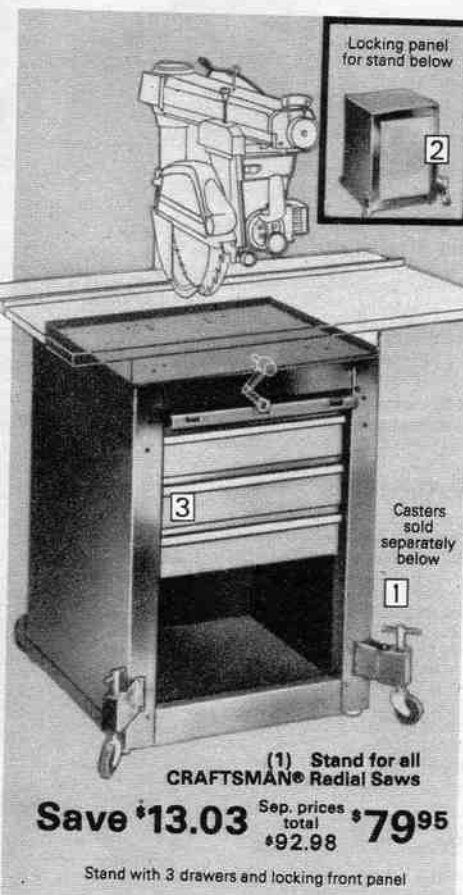

Leg Sets

For shaper, sander-grinder, belt-disc sander, all table, radial, and band saws



(1) Stand alone. Heavy-gauge steel. Charcoal-gray enamel finish. 24x25x32 3/4 in. high. Rubber-padded feet adjust for leveling. Storage area.

ORDERING INFORMATION: Casters not included. 9 HT 22205L—Shipping weight 57 pounds \$49.99

(2) Locking Front Panel. When not in use, panel slides inside of cabinet. When closed, panel covers drawers, locks front. Red finish. Includes 2 keys. ORDERING INFORMATION:

9 HT 10335C—Shipping weight 11 pounds \$11.49

(3) Drawer. Heavy-gauge steel... red finish. Rust-resistant galvanized slides are smooth sliding. 16 1/2 x 15 1/2 x 4 3/8 in. deep. Aluminum pulls.

ORDERING INFORMATION: 9 HT 10326—Shipping weight 9 lbs. Ea. \$10.50

Stand with 3 drawers and locking front panel. Incl. three drawers (3) and locking panel (2).

ORDERING INFORMATION: Unit sent unassembled. 9 HT 1008L5—Shipping weight 90 pounds \$79.95

(4 and 5) Stands

CONSTRUCTION: Stamped steel construction. A-frame design... provides you with an exceptionally sturdy, steady work surface. Stands have adjustable rubber-padded leveling feet that resist creeping and marring of floors. Charcoal gray finish.

(4) For CRAFTSMAN 8, 9, or 10-inch table saws. Top 19 1/2 x 15 1/4 inches overall. Height adjusts up to 3 1/4 inches from 23 1/2 to 26 3/4 inches.

ORDERING INFORMATION: Sent unassembled. Shipping weight 32 pounds.

9 HT 22214C.....\$39.99

(5) For CRAFTSMAN 12-inch band saw, wood shaper, and belt-disc sander. Top 19 1/2 x 15 1/4 in. Height adjusts from 27 3/8 to 30 7/8 inches. Includes motor mount.

ORDERING INFORMATION: Unit sent unassembled. Shipping weight 39 pounds.

9 HT 22213C.....\$39.99

(6 thru 9) Leg Sets

CONSTRUCTION: Heavy 18-gauge steel provides sturdy support and proper working heights. Rubber-padded adjustable leveling feet for uneven floors... resist creeping and marring of floors. Leg sets are sent unassembled.

ORDERING INFORMATION: Each leg set fits only the CRAFTSMAN power tool it is listed under.

(6) For all radial saws 9 HT 22238C—Shipping weight 31 lbs.....\$29.99

(7) For band saws, shaper, belt-disc sander 9 HT 22236C—Shipping weight 27 lbs.....\$32.99

(8) For all table saws. Wt. 21 lbs. 9 HT 22237C—For 7 1/2 in. Saws.....\$29.99

9 HT 22235C—For 9, 10-in. Saws.....\$31.99

(9) For sander grinder 9 HT 22239C—Shipping weight 25 lbs.....\$29.99

(10) Casters for Power tool Stands, Cabinets

CONSTR.: Heavy duty. Can support up to 400 lbs. Set incl. 2 adj. 2 1/2-in. front swivel wheels with T-handles for height adjustment. Also incl. two 3-in. non-swivel wheels for the rear. Both made of extra strong phenolic plastic.

For stands shown on this page, and most stands having 5" or 10" slanted or straight sides. Outside mounting.

ORDER INFO: Wt. 6 lbs. 9 HT 22201.....Set \$19.99

(11) Casters for leg sets. Mounts inside of front legs.

ORDER INFO: Wt. 6 lbs. 5 oz. 9 HT 22209.....Set \$19.99

Versatile work Lights... mount on benches, tools, walls, and stands



(12) 34-in. Work Light with spring-tension control

Never sags... stays where you put it. CONSTR.: Aluminum vented shade helps keep light from over-heating. Shade distributes light without creating shadows. 34-in. heavy gauge steel arm stays put due to spring tension control. MOUNTINGS: Clamp-on and wall-type included.

FINISH: Outside finished in electrostatically applied, oven-baked enamel... scratch resistant. Inside of shade coated with dull gloss enamel reflector paint... will not yellow.

ELEC. INFO: Use maximum 60-w. bulb, 110-120 v. On/off switch on top of shade. 6-ft. cord. UL listed.

ORDER INFO: Wt. 3 lbs. 10 oz. 9 HT 2488.....\$19.99

(13) CRAFTSMAN® Work Light with flexible neck

Mounting lamp right on the machine provides the best light for tool operation.

CONSTR.: Vented shade... inner shield keeps it cool outside. Neck is flexible... direct light where you need it.

ACCESSORIES: Mounting brackets. Bulb not included.

ELEC. INFO: Use max. 60 w. bulb, 110-120 v. On/off switch. 6-ft. cord. UL listed.

ORDER INFO: Wt. 2 lbs. 12 oz. With 18-in. Neck

9 HT 2480.....\$14.99

With 24-in. Neck 9 HT 2481.....\$16.99

Whatever the job
... your CRAFTSMAN®
Table Saw or Radial Saw
can do more with
these Accessories

YOU CAN DO MORE...

Accessories for table saws and radial saws

Order table saws on front cover and pages 3 thru 5; radial saws on pages 8 thru 10

You can make dados, and
grooves, edge grooves, slots,
troughs, notches, rabbets,
chamfers and V-grooves

You can make decorative cuts... do many
shaping, jointing and planing operations

CRAFTSMAN® Adjustable Dado* with carbide tips for extra-smooth cuts

Adjustable hub... dial width from
1/4 to 1 1/8-in. without removing dado

16-teeth 24-teeth 32-teeth
\$32.99 \$39.99 \$46.99

USES: Plough, dado, lap, joint, groove, rabbet and more. Crosscut all hard and soft woods. For use on Formica® laminated plastic, other laminates and sensitive materials. Use on 9, 10, 12, 14-in. radial or table saws only**.

CONSTRUCTION: 7-inch tempered tool-steel blade. Carbide-tipped teeth. 3/4-inch hole; 5/8-inch bushing.

CUTTING CAPACITY: Widths from 1/4 to 1 1/8-in.

(1) 16-tooth Adjustable Dado. Max. depth 1 1/2 in.

ORDERING INFORMATION:
9 HT 3263—Shipping weight 2 pounds 10 ounces \$32.99

(2) 24-tooth Adjustable Dado. Max. depth 1 1/2 in.

ORDERING INFORMATION:
9 HT 3261—Shipping weight 2 pounds 13 ounces \$39.99

(3) 32-tooth Adjustable Dado. Max. depth 1 1/2 in.

ORDERING INFORMATION:
9 HT 3262—Shipping weight 2 pounds 13 ounces \$46.99

CRAFTSMAN® Dado Sets* with Kromedge® Blades ... precision-ground for accuracy

The Kromedge® blades on these sets are rust-resistant for long life; precision-ground; heat-treated and tempered—stay sharp many times longer than ordinary steel blades. Teeth expertly precision-sharpened. Blade and chippers matched together... provides smooth, precise cuts.

(4) Our best professional-quality satin-cut Dado Sets

USES: Cut fine veneers, other sensitive materials with little or no splintering... give straight even sides. Also for plywood.

CONSTRUCTION: Kromedge® steel. Outside cutters taper-ground for proper clearance, accurate alignment.

SET COMPOSITION: Two 3/8-in. outside cutters, four 1/8-in. chippers, one 1/16-in. chipper.

CUTTING CAPACITY: Dados to 1 1/4 in. deep. Max. width of cut is 1 1/8 in. Fits 5/8-in. arbor.

SIZES. ORDER INFO:

7-inch Set. Wt. 4 lbs. 12 oz.
9 HT 3257 Set \$34.99

8-inch Set. Wt. 5 lbs. 8 oz.
9 HT 3253 Set \$39.99

(5) 8-inch flat ground Dado Set

Handles extra-tough jobs on table, radial or swing saws.

USES: For rough cuts on lower quality lumber.

CONSTRUCTION: Steel with Kromedge® finish... resists rust and wear.

SET COMPOSITION: Two outside cutters 1/8-inch thick. Add or remove the one 1/16-inch and four 1/8-inch chippers for maximum variations.

CUTTING CAPACITY: Depth varies by machine. Maximum width of cut is 1 1/8 in. Fits 5/8-inch round saw arbor.

ORDERING INFORMATION: Instruction booklet included.

Shipping weight 5 lbs. 8 oz.
9 HT 32475 Set \$29.99

6-in. Set for radial and table saws (not shown). 4-inside chippers 1/8-in. thick, one 1/16-in. thick. Two 1/8-in. thick outside cutters, 4 paper washers. Max. width of cut is 1 1/8 in. Instruction booklet included.

ORDERING INFORMATION:
9 HT 3249—Fits 5/8-in. round arbor. Wt. 3 lbs. 4 oz. Set \$19.99

*When using Dados and Molding Heads with table saws you must use proper inserts sold on p. 21; for radial saws you must use proper guard sold on p. 20.

**Not for use on any radial saw with universal motor

CRAFTSMAN® Molding Heads* and Kromedge® Cutter-bit Sets

Do many woodworking
cuts and operations
normally requiring a shaper

15-pc. Set 21-pc. Set
\$26.99 \$24.99
7-in. diam. 4 3/4-in. diam.

27-piece Set \$36.99 7-inch diameter

7-inch diameter, 15-piece Set

SET COMP: 12 bits (four 3-pc. sets: A, D, E, F below), triple-cutter head, spacer-washer, bushings, instructions, case.

CONSTRUCTION: Kromedge® steel. 7-in. diameter.

ORDER INFO: For 9, 10, 12-in. direct-drive radial or belt-driven table saws. Fits 5/8 or 3/4-in. round arbors.

9 HT 3218—Shipping weight 3 lbs. 5 oz. Set \$26.99

4 3/4-inch diameter, 21-piece Set

SET COMP: 18 bits (six 3-pc. sets: A thru F below), triple-cutter head, spacer-washer, bushings, instructions, case.

CONSTRUCTION: Kromedge® steel. 4 3/4-inch diameter.

ORDERING INFORMATION: For 8, 9, 10-in. belt-driven table saws. Fits 1/2, 5/8, 3/4-in. round arbors. Not for 7 1/2-in. table saw or former radial saw 9-2922.

9 HT 3221—Shipping weight 2 lbs. 4 oz. Set \$24.99

7-inch diameter, 27-piece Set

SET COMP: 24 bits (eight 3-pc. sets: A thru H below), triple-cutter head, spacer-washer, bushings, instructions, case.

CONSTRUCTION: Kromedge® steel. 7-inch diameter.

ORDER INFO: For 9, 10, 12-in. radial; or 12-in. table saws. Fits 5/8 or 3/4-in. round arbors.

9 HT 3217—Shipping weight 4 lbs. 3 oz. Set \$36.99

7-in. diameter Triple-cutter Head alone

CONSTRUCTION: Steel. 7-in. diameter. No bits included.

ORDER INFO: For use with Kromedge® bit sets sold below.

9 HT 3214—Shipping weight 2 lbs. 10 oz. \$9.99

Kromedge® Cutter-bit Sets. Tool steel. 3 bits in each set.

Illus.	Catalog Number	Type of Cut (All bits 1 inch wide)	Wt. oz.	Set
(A)	9HT2353	Cabinet Door Lip	4	\$3.99
(B)	9HT2355	Base Molding	4	3.99
(C)	9HT3201	Glue Joint	5	3.99
(D)	9HT2352	3 bead (1/4 inch each)	5	3.99
(E)	9HT3212	1/4-inch Cove and Bead	5	3.99
(F)	9HT2302	1-inch Planer and Joiner	5	3.99
(G)	9HT3211	Window Sash	5	3.99
(H)	9HT3204	Vee Groove	4	3.99
(J)	9HT2351	1/4-inch and 1/2-inch Quarter Round	5	3.99
(K)	9HT3206	1-inch Flute (1/2-inch radius)	5	3.99
(L)	9HT3207	3/4-inch Quarter Round, 1/2-inch Cove (Drop Leaf)	5	3.99
(M)	9HT3208	3/4-in., 1/2-in. Quarter Round; 1/4-in. Bead	4	3.99
(N)	9HT2354	Clover Leaf and Screen Mold	4	3.99
(P)	9HT3202	"Ogee" Window and Door Stop	4	3.99
(R)	9HT3203	1/2-inch Flute and 1/2-inch Cove	4	3.99
(S)	9HT3209	3/4-inch Cove	4	3.99
(T)	9HT3210	Panel Cupboard Door	5	3.99
(V)	9HT3213	Cupboard Door Rail End	5	3.99
(W)	9HT3203	Tongue-Groove. Has 6 bits	7	7.99

CRAFTSMAN® 22-piece Single-cutter Molding Head* Set


Includes 18 bits that cut
all patterns above except (G), (V) **\$34.99**
set

SET COMPOSITION: Includes 18 single Kromedge® bits, cutter head, wrench, spacer-washer, bushing, instruction booklet, plastic case. Set includes molding head.

CONSTRUCTION: Kromedge® steel. 5 5/8-in. cutting diameter.

ORDERING INFORMATION: For table or radial saws up to 10-in. Not for use on former 8-in. radial 9-2922.

9 HT 3215—Shpg. wt. 3 lbs. ... Set \$34.99

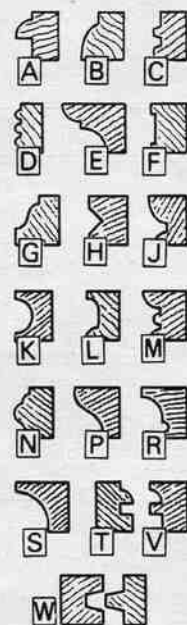

CRAFTSMAN® Kromedge® Saw Blades

Made of chrome-nickel-molybdenum steel . . . a tough alloy with the ability to hold a keen cutting edge. Fortified with chromium to help these blades last longer than ordinary steel blades

1
KROMEDGE®
Hollow-ground Planer

2
KROMEDGE®
Master Combination

3
KROMEDGE®
Rip

4
KROMEDGE®
Thin Rim Spline Cut Veneer

5
KROMEDGE®
Chisel Tooth

6
KROMEDGE®
Ply Tools

(1) Hollow-ground Planer Blade

USES: Crosscuts, rips, miters in hard, soft wood, plywood, furniture stock.

CONSTRUCTION: Deep hollow-ground design helps blade run true, reduce warping. For all Sears saws and other saws with center hole size listed in chart.

SIZES, ORDERING INFO: See Safety Note on facing page.

Catalog Number	Diam. in.	Sections	Total Teeth	Center Hole, in.	Max. RPM	Shpg. wt. ea. lbs. oz.	Price Each	Two for
9 HT 32427	12	19	76	3/4-3/8	3500	2 12	\$14.99 \$12.98	\$26.98
9 HT 32428	10	16	64	3/8	4200	1 11	11.99	21.58
9 HT 32425	9	14	56	3/8-1/2	4800	1 7	8.99	16.18
9 HT 32424	8	12	48	3/8-1/2	5200	1	6.99	12.58
9 HT 32423	7 1/4	12	48	3/8	5700	13	6.79	11.99
9 HT 32422	7	11	44	3/8	6000	12	6.49	11.68
9 HT 32429	6 1/2	10	40	3/8-1/2	6400	11	5.99	10.70

(2) Master Combination Blade

USES: Crosscuts, miters hard, soft wood; rips all dry wood, furniture stock.

CONSTRUCTION: Teeth set for fast, smooth cuts. Deep expansion slots help blade run true, reduce warping. For all Sears saws, other saws with center hole size listed.

SIZES, ORDERING INFO: See Safety Note on facing page.

Catalog Number	Diam. in.	Sections	Total Teeth	Center Hole, in.	Max. RPM	Shpg. wt. ea. lbs. oz.	Price Each	Two for
9 HT 32499	12	18	72	3/4-3/8	3500	3 2	\$8.99	\$16.18
9 HT 32498	10	16	64	3/8	4200	1 12	5.99	10.78
9 HT 32497	9	16	64	3/8-1/2	4800	1 6	4.99	8.98
9 HT 32496	8	12	48	3/8-1/2	5200	1	3.99	7.18
9 HT 32495	7 1/2	15	60	3/8-1/2	5800	15	3.99	7.18
9 HT 32494	7 1/4	15	60	3/8	5700	14	3.69	6.64
9 HT 32493	7	12	48	3/8	6000	11	3.49	6.28
9 HT 32492	6 1/2	12	48	3/8-1/2	6400	10	3.29	5.92

(3) Rip Blade

USES: Rips in all woods, excellent for re-sawing.

CONSTRUCTION: Extra-deep gullets help sweep sawdust out. With expansion slots. For all Sears saws, other saws with center hole size listed.

SIZES, ORDERING INFO: See Safety Note on facing page.

Catalog Number	Diam. in.	Teeth	Center Hole, in.	Maximum RPM	Shpg. wt. ea. lbs. oz.	Price Each	Two for
9 HT 32567	10	36	3/8	4200	1 12	\$5.99	\$10.78
9 HT 32566	9	36	3/8-1/2	4600	1	4.99	8.98
9 HT 32564	7 1/4	30	3/8	5700	14	3.69	6.64
9 HT 32563	7	30	3/8	6000	11	3.49	6.28
9 HT 32562	6 1/2	30	3/8	6400	10	3.29	5.92

(4) Plywood and Veneer Blade

USES: Cut laminates, plastics, veneers, plywood, other sensitive materials. Max. cut 1 1/4 in.

CONSTRUCTION: Taper-ground rim. For all Sears saws, other saws with center hole size listed.

SIZES, ORDER INFO: See Safety Note on facing page.

Catalog Number	Diam. in.	Teeth	Center Hole, in.	Maximum RPM	Shpg. wt. ea. lbs. oz.	Price Each	Two for
9 HT 32539	10	200	3/8	4200	1 13	\$12.99	\$23.38
9 HT 32538	9	200	3/8-1/2	4600	1 10	9.99	17.98
9 HT 32537	8	176	3/8-1/2	5200	1	7.99	14.38
9 HT 32534	7	200	3/8	6000	15	6.69	12.04
9 HT 32532	6 1/2	150	3/8-1/2	6400	12	6.29	11.32

(5) Chisel-tooth Combination Blade

USES: All-purpose crosscuts, rips and miters in hard and soft wood.

CONSTRUCTION: Flat top ground for smooth and precise cuts. For all Sears saws and other saws with center hole size listed.

SIZES, ORDERING INFO: See Safety Note on facing page.

Catalog Number	Diam. in.	Teeth	Center Hole, in.	Maximum RPM	Shpg. wt. ea. lbs. oz.	Price Each	Two for
9 HT 32702	12	24†	3/4-3/8	3500	2 15	\$7.99	\$14.38
9 HT 32668	10	28	3/8	4200	1 13	4.99	8.98
9 HT 32667	9	28	3/8-1/2	4800	1 8	4.49	8.08
9 HT 32666	8	28	3/8-1/2	5200	1 2	3.99	7.18
9 HT 32665	7 1/2	26	3/8-1/2	5600	15	3.79	6.82
9 HT 32664	7 1/4	26	3/8	5700	14	3.29	5.92
9 HT 32669	7	26	3/8	6000	15	3.19	5.74
9 HT 32663	6 1/2	24	3/8-1/2	6400	11	2.99	5.38

†This blade best suited for heavy-duty ripping.

(6) Crosscut Plywood Blade

USES: All-purpose crosscuts in Celotex® fiberboard, woods, veneers.

CONSTRUCTION: Flat top ground. Large number of teeth allow each to take small, equal bites . . . results in fine, smooth cuts. For all Sears saws, other saws with center hole size listed.

SIZES, ORDERING INFO: See Safety Note on facing page.

Catalog Number	Diam. in.	Teeth	Center Hole, in.	Maximum RPM	Shpg. wt. ea. lbs. oz.	Price Each	Two for
9 HT 32451	12	200	3/4-3/8	3500	3	\$8.99	\$16.18
9 HT 32446	10	200	3/8	4200	1 12	5.99	10.78
9 HT 32448	9	200	3/8-1/2	4800	1 8	4.99	8.98
9 HT 32447	8	176	3/8-1/2	5200	1 2	3.99	7.18
9 HT 32449	7 1/2	200	3/8-1/2	5600	14	3.99	7.18
9 HT 32444	7 1/4	200	3/8	5700	14	3.69	6.64
9 HT 32445	7	200	3/8	6000	13	3.49	6.28
9 HT 32442	6 1/2	150	3/8-1/2	6400	10	3.29	5.92

*Center hole knockout bushed for arbor sizes listed.

Save 15% over regular each price when you buy 3-piece Blade Pack

SIZES, ORDERING INFO: See Safety Note on facing page.

Catalog Number	Diam. in.	Shpg. wt. lbs. oz.	Separate prices total	Blade Pack price
9 HT 32351	12	9 1	\$25.97	\$22.67
9 HT 32352	10	5 5	16.97	14.42
9 HT 32353	9	4 5	14.47	12.29
9 HT 32354	8	3 4	11.97	10.17
9 HT 32355	7 1/2	1 12	11.77	10.00
9 HT 32356	7 1/4	2 10	10.67	9.06
9 HT 32357	7	2 7	10.17	8.64
9 HT 32358	6 1/2	1 15	9.57	8.13

Sears Coarse-tooth Disposable Framing Blades

For fast rip framing cuts on timbers, 2x4's. CONSTRUCTION: Tempered 17-gauge steel bodies, 5/8-inch center hole.

SIZES, ORDERING INFO: Not Craftsman.

6 1/2-inch diameter. 24 teeth. Wt. each 11 oz.
9HT32612 Ea. \$1.49; 5 for \$8.99; 40 for \$54.99
7-inch diameter. 26 teeth. Wt. each 15 oz.
9HT32512 Ea. \$1.49; 5 for \$8.99; 40 for \$54.99
7 1/4-inch diameter. 24 teeth. Wt. each 14 oz.
9HT32712 Ea. \$1.49; 5 for \$8.99; 40 for \$54.99

Recondition saw blades with attachment for your bench grinder

Resharpens, reshapes, joints saw blades. Attaches to either side of any 6-in. or larger grinder. Swing arm to side when not in use. Locating cone automatically centers blade.

CAPACITY: Handles circular blades (except carbide-tipped, disposable) up to 16 in. in diam. 6-in. grinding wheel fits 1/2, 3/8 or 3/4-in. arbor. Cone fits up to 2-in. round, diamond or square-shaped arbor holes.

ORDER INFO: Order blade setting tool (9 HT 23391) sold separately on page 21.

9 HT 23393—Shpg. wt. 14 lbs. \$59.99



\$59.99

Last up to 5 times longer than any other blade we offer

(1) Blades with flat, top-ground tips

For more controlled cuts than with non-tipped blades . . . tips project only .020/.050 in. above non-cutting edge taking small, equal bites.

USES: All-purpose crosscuts, rips, miters and bevels (both regular and finish cuts). Regular cuts in Masonite® brand hardboard, Formica® brand plastic laminate, asbestos wallboard, soft metals. *Not for use on ferrous metals or masonry.*

SIZES, ORDERING INFO: See Safety Note below.

Catalog Number	Diam. in.	Teeth	Max. RPM	Center Hole in.	Shpg. wt. lbs. oz.	Price
9 HT 32465	6 1/2	8	6400	5/8-1/2*	1 5	\$9.99
9 HT 32461	7	8	6000	5/8-1/2*	1 7	10.49
9 HT 32481	7 1/4	14	6000	5/8	1 14.99	
9 HT 32483	7 1/4	8	5700	5/8-1/2*	1 4	10.99
9 HT 32484	8	12	5200	5/8-1/2*	1 10	12.99
9 HT 32485	9	12	4600	5/8-1/2*	2 4	14.99
9 HT 32486	10	12	4200	5/8-1/2*	2 11	17.99
9 HT 32469	12	12	3500	3/4-5/8*	3 4	22.99

(2) Blades with 24 alternately bevel-ground tips for fast crosscutting and ripping

Produces smooth, almost splinter-free cuts, taking smaller bites than blade (1) above.

USES: Crosscuts, rips, miters and bevels. Cuts all woods, plywoods, chipboard, Masonite® brand hardboard, asbestos wallboard and plastic. *Not for use on ferrous metals or masonry.*

SIZES, ORDERING INFO: See Safety Note below.

Catalog Number	Diam. in.	Teeth	Max. RPM	Center Hole in.	Shpg. wt. lbs. oz.	Price
9 HT 32487	6 1/2	24	6700	5/8-1/2*	1 15	\$12.99
9 HT 32488	7	24	6000	5/8	1 13.99	
9 HT 32489	7 1/4	24	5700	5/8	1 3	14.99
9 HT 32471	9	24	4600	5/8-1/2*	2 4	21.99
9 HT 32476	10	24	4200	5/8	2 10	23.99
9 HT 32477	12	24	3500	3/4-5/8*	3 11	29.99

(3) Blades with alternately bevel-ground tips for smooth crosscutting and trimming

Blades have more teeth than blade (2) above, for even smoother, almost splinter-free cuts. Expansion slots guard against warping, heat distortion.

USES: Crosscuts, rips, miters and bevels. Cuts all woods, laminates, plastics, Formica® brand plastic laminate, Masonite® brand hardboard, Transite® asbestos cement products and other materials. *Not for use on ferrous metals or masonry.*

SIZES, ORDERING INFO: See Safety Note below.

Catalog Number	Diam. in.	Teeth	Max. RPM	Center Hole in.	Shpg. wt. lbs. oz.	Price
9 HT 32559	8	40	5200	5/8-1/2*	1 12	\$24.99
9 HT 32551	9	40	4600	5/8-1/2*	2 6	27.99
9 HT 32555	10	40	4200	3/4-5/8*	2 12	29.99
9 HT 32555	12	48	3500	3/4-5/8*	3 10	39.99

*Center-hole knockout bushed for arbor sizes listed.

**Excellent for cutting through nails in floorboards.

10-in. Blade with 48 alternately bevel-ground tips. Similar to (3) above except tips are triple-ground for even smoother, more satin-like cuts.USES: Crosscuts, rips, miters and bevels. Cuts all woods, metals such as aluminum, brass, copper and zinc. *Not for use on ferrous metals or masonry.*

ORDERING INFO: For use on 10-inch or larger saws. See Safety Note below.

9 HT 3250—Shpg. wt. 2 lbs. 12 oz. \$34.99

(4) 10-inch Blade with 72 alternately bevel-ground tips. Our finest blade has more teeth than any carbide-tipped blade we've ever offered. Alternately beveled, triple-ground tips remove tiny bits of material for the smoothest, most satin-like cuts of any Craftsman blade. Standard (not thin-rim) construction lets you cut thick materials and still obtain a fine, smooth finish. Expansion slots reduce warping, heat distortion.USES: Crosscuts, rips, miters, bevels. Ideal for thin, brittle materials; thicker stock as well. Fits 5/8 or 3/4-in. arbors. Max. cutting depth 1 1/4 in. Max. rpm 4200. *Not for ferrous metals, masonry.*

ORDERING INFO: For use on 10-inch or larger saws. See Safety Note below.

9 HT 32556—Shpg. wt. 2 lbs. 10 oz. \$49.99


10-in. Blade with 60 alternately bevel-ground tips. Thin-rim construction produces fine, narrow kerf. Cuts thru thin, brittle materials easily. Tips are triple-ground. With expansion slots.USES: Crosscuts, rips, miters and bevels. Ideal for plywood, veneer, plastic. Fits 5/8 or 3/4-inch arbors. Max. cutting depth 1 1/4 in. Max. rpm 4200. *Not for use on ferrous metals or masonry.*

ORDERING INFO: For use on 10-inch or larger saws. See Safety Note below.

9 HT 32428—Shpg. wt. 2 lbs. 10 oz. \$39.99

Here are some features that make these Blades the finest we offer:

- Kromedge® blade bodies of tough, tempered steel fortified with chromium
- Coatings of chrome-nickel and chrome-plate resist rust; help reduce gum and pitch build-up that make blades bind
- Blade teeth are precision-milled for uniformity. Tungsten carbide tips are cobalt-bonded for strength
- Each tip is individually brazed onto the blade, then diamond-ground to form a solid, keen cutting edge
- Fine balancing provides true run out
- Blades fit all Sears, Black and Decker, Skill and other brand saws with round arbors . . . check center hole sizes listed in charts

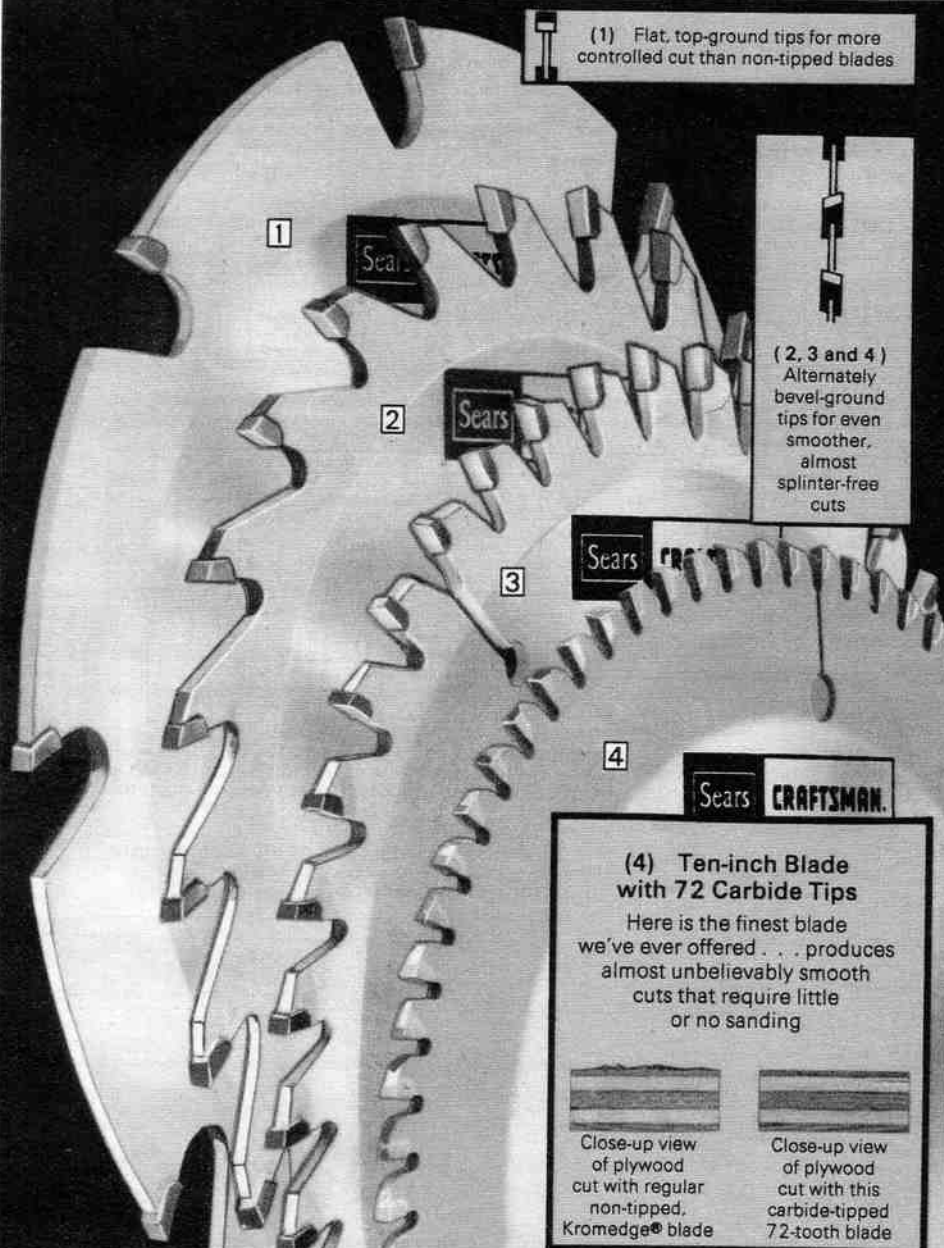

(1) Flat, top-ground tips for more controlled cut than non-tipped blades

(2, 3 and 4) Alternately bevel-ground tips for even smoother, almost splinter-free cuts

(4) Ten-inch Blade with 72 Carbide Tips

Here is the finest blade we've ever offered . . . produces almost unbelievably smooth cuts that require little or no sanding



Close-up view of plywood cut with regular non-tipped, Kromedge® blade



Close-up view of plywood cut with this carbide-tipped 72-tooth blade

Sears flat top-ground Carbide-tipped Steel BladesUSES: Recommended for rough work where blade can be easily damaged and finest blades are not needed. Good for general-purpose woodworking . . . crosscuts, rips, miters, bevels (regular and finish cuts). Also for regular cuts in hardboard, plastic laminate, asbestos wallboard, soft metals like aluminum, brass. *Not for use on power-fed industrial machines, ferrous metals or masonry.*

CONST.: Steel bodies, tungsten carbide tips.

SIZES, ORDERING INFO: See Safety Note at left.

Catalog Number	Diameter inches	Teeth	Max. RPM	Center Hole in.	Shpg. wt. lbs. oz.	Price
9 HT 32462	6 1/2	8	6400	5/8-1/2*	1 1	\$5.99
9 HT 32463	7	8	6000	5/8	1 1	5.99
9 HT 32464	7 1/4	8	5700	5/8	1 3	5.99
9 HT 32478	8	8	5200	5/8-1/2*	1 6	6.99
9 HT 32479	10	8	4200	5/8	2 14	7.99

*Center-hole knockout bushed for arbor sizes listed.


COMPK SLAEGD

CRAFTSMAN Motors for workshop tools, sump pumps, oil burners, fan and furnace blowers

FULL ONE-YEAR WARRANTY ON CRAFTSMAN® MOTORS

If this Craftsman Motor fails to give complete satisfaction within one year from the date of purchase, return it to the nearest Sears store throughout the U.S. and Sears will replace it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Capacitor-start Motors for hard-starting tools

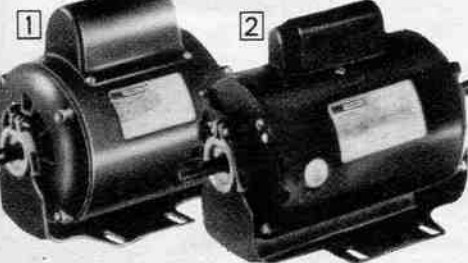

1/2 HP, ball bearings
1725 rpm **\$67⁹⁹**

1/2 HP, ball bearings
3450 rpm **\$57⁹⁹**

(1) 1725-rpm. For lower speed tools like drill presses, band saws, wood lathes, metal lathes, and compact bench tools. Ball-bearing types are also good for pumps or compressors.

Cat. No.	HP	Bearings	Shaft Diameter	Volts	Watts††	Overload Protector	Shpg. wt.	Price
9 HT 1250C	1/2	Sleeve	Single 1/2-inch*	115 or 230	490	Manual reset	20 lbs.	\$52.99
9 HT 1255C	1/2	Sleeve	Single 1/2-inch*	115	660	None	21 lbs.	52.99
9 HT 1254C	1/2	Ball	Double 1/2"-5/8-in.†	115 or 230	660	Manual reset	21 lbs.	67.99
9 HT 1256C	3/4	Sleeve	Single 5/8-in.†	115 or 230	960	None	24 lbs.	72.99
9 HT 1215C	1	Ball	Single 3/4-in.†	115 or 230	1200	Manual reset	38 lbs.	94.99

*With 3/8-in. adapter sleeve and 3/4-in. flat on shaft

†With 3/16-inch square keyway

††Full-load input watts

(2) 3450-rpm. For higher speed tools like table saws, jointer-planers, wood shapers, belt and disc sanders. Double-end shaft; 5/8-inch diameter with 3/16-inch square keyway; and 1/2-inch diameter with 3/4-inch deep flat.

Cat. No.	HP	Bearings	Volts	Watts††	Overload protector	Shpg. wt.	Price
9 HT 1216C	1/2	Sleeve	115	720	None	17 lbs.	\$52.99
9 HT 1218C	1/2	Ball	115 or 230	720	Manual reset	17 lbs.	57.99
9 HT 1226C	3/4	Sleeve	115	1000	None	19 lbs.	57.99
9 HT 1219C	3/4	Ball	115 or 230	1000	Manual reset	19 lbs.	65.99
9 HT 1217C	1	Sleeve	115	1250	None	21 lbs.	65.99
9 HT 1220C	1	Ball	115 or 230	1250	Manual reset	23 lbs.	74.99
9 HT 1221C	1 1/2	Ball	115 or 230	1800	Manual reset	21 lbs.	95.99

††Full-load input watts

Split-phase Motors for easy starting tools

For easy starting tools such as grinders, sanders, and compact bench tools.

CONSTRUCTION: 1725 rpm. Rigid base with 3x4 7/8-inch mounting (NEMA 56 frame), except (9 HT 1233C) which has welded foot-mount base with 2 1/4x4 1/4-inch (NEMA 48 frame). Sleeve bearings. Mount in any position, drip-proof in horizontal.

ELEC. INFO: Runs on 115-volt, 60 Hz., AC. 4-foot, 3-wire cord. No overload protector (except 9 HT 1233C has manual reset overload protector). Electrically reversible.

ORDERING INFORMATION: See warranty above.

Catalog No.	HP	Bearings	Shaft End Diameter	Volts	Watts††	Overload Protector	Shpg. wt.	Price
9 HT 1251C	1/4	Sleeve	Single 1/2-in.*	115	420	None	16 lbs.	\$32.99
9 HT 1252C	1/4	Sleeve	Single 1/2-in.*	115	490	None	16 lbs.	37.99
9 HT 1233C	1/4	Sleeve	Single 1/2-in.*	115	490	Manual Reset	16 lbs.	45.99
9 HT 1253C	1/2	Sleeve	Single 1/2-in.*	115	670	None	18 lbs.	42.99


*With 3/8-in. adapter sleeve and 3/4-in. flat on shaft

†With 3/16-inch square keyway

††Full-load input watts



\$42⁹⁹ 1/2 HP NEMA 48 frame



\$72⁹⁹ 1/2 HP motor

(3) 1/2-HP. Split-phase Fan and Furnace Blower Motor

Replaces 1/8 thru 1/2-HP furnace blower and fan-type motors. CONSTRUCTION: Sleeve bearings. Single-end 1/2-in. shaft with 3/8-in. adapter sleeve and 3/4-in. flat on shaft. Resilient base. Thru-bolts for direct-drive fans. Mount in any position . . . drip-proof in horizontal position.

ELECTRICAL INFO: 115-v., 60-Hz., AC. No cord or switch. Automatic reset overload protector. Electrically reversible.

ORDERING INFORMATION: See warranty above, at left.

Catalog Number	Speeds (rpm)	Mounting (inches)	NEMA Frame	Watts††	Wt. lbs.	Price
9 HT 1980C	1725	2 1/4 x 4 1/4	48	450	17	\$42.99
9 HT 1983C	1725	3 x 4 7/8	56	450	20	42.99
9 HT 1971C	1140	3 x 4 7/8	56	400	22	52.99
	1725			540		

††Full-load input watts

(4) 1/2-HP. Capacitor-start Fan and Furnace Blower Motor

For hard-starting belt-driven blowers such as fans and furnaces with central air conditioning. CONSTRUCTION: Sleeve bearings. 1725 rpm. Single-end 5/8-in. shaft, 3/16-in. sq. keyway. Resilient mount base—3x4 7/8 in. (NEMA 56 frame). Mount any position . . . drip-proof in horizontal position.

ELECTRICAL INFO: 115 or 208-230-v., 60-Hz., AC. No cord or switch. Overload protector. Electrically reversible.

ORDERING INFORMATION: See warranty above, at left.

9 HT 1972C—1/2-HP. 650 full-load input w. Wt. 22 lbs., . . . \$72.99



1/2 HP motor **\$39⁹⁹**

Split-phase Sump Pump Motors

CONSTR.: Hub-mount 1 1/4-in. outside diam., 1 1/2-in. inside diam. for direct mount to support tube. (NEMA 48K frame). Sleeve bearings. 1725 rpm. Single-end 1/2-inch diam. flatted shaft. Mount in any position, drip-proof in vertical shaft-down position.

ELEC. INFO: Runs on 115-volt, 60 Hz., AC. Electrically reversible. No switch or cord provided. (Use switch 42 G 2772, see page 992 of our Fall Big Book). Automatic reset overload protector.

ORDERING INFORMATION: See warranty above, left.

1/2 HP. 660 full-load input w.

9 HT 1236C—Wt. 18 lbs. \$39.99

1/2 HP. 490 full-load input w.

9 HT 1237C—Wt. 16 lbs. \$36.99



\$39⁹⁹

1/2-HP Split-phase Oil Burner Motor

CONSTRUCTION: 1/2-HP. Face mounting (NEMA 56N frame). Sleeve bearings. 1725 rpm. Single-end, 1/2-in. diameter flatted shaft. Mount in any position . . . drip-proof in all positions. Can replace most NEMA 48N and 56N frame 1725-rpm oil burner motors up through 1/2 HP.

ELECTRICAL INFO: Runs on 115-volt, 60 Hz., AC. 200 full-load input watts. Electrically reversible. 12-inch cord is stripped and skinned (no plug). No switch is provided.

ORDERING INFORMATION: See warranty above.

Shpg. wt. 11 lbs. 8 oz.

9 HT 1235 . . . \$39.99



Motor Mount.

Fastens to motor base to help maintain proper V-belt tension. Motor provides weight for belt tension. Mounts on top of bench or on side of tool stand.

CONSTRUCTION: Swivel type . . . fits all size motors. Steel. Punched for bolts.

ORD. INFO: Bolts not incl. Wt. 1 lb. 12 oz.
9 HT 2730 . . . \$3.50



Motor Rail Set.

For motors up to 1 HP. Helps provide proper belt tension.

CONSTRUCTION: Aluminum 2 3/8 to 5 inches between centers. Complete with fasteners and 2 clips.

ORDERING INFO: Shpg. wt. 15 oz.
9 HT 2265 . . . Set \$2.49

Pkg. of 2 extra clips. For setting motor in more positions.

ORD. INFO: Wt. 6 oz.
9 HT 2268 . . . Pkg. \$1.29



CRAFTSMAN® Power Tool Switch.

CONSTR.: Pull-on/ Push-off switch with locking key. Can be mounted on power tools or work bench. Key hole slots for mounting switch.

ELEC. INFO: 6-ft., 3-wire cord. Use only with ground power source. Not for equipment rated at more than 15 amps or more than 1/4 HP at 125 v.

ORD. INFO: Wt. 2 lbs.
9 HT 13633 . . . \$12.50



Adjustable Pulley.

CONSTRUCTION: Machined cast-iron construction. Class 3 threaded barrel, balanced, set-screws. Locking does not mar barrel threads. Diameter adjustment in 1/10-inch increments. Outside diameter is 3.15 in. Bore size 1/2 in. Use for 3L or 4L belts. Pitch 1.7 to 2.5 or 1.9 to 2.9 in.

ORDERING INFO: Shpg. wt. 1 lb. 4 oz.
9 HT 28072 . . . \$4.50



CRAFTSMAN® V-Belts Low as **\$149**

V-belts.


Balanced to run true. Tough, yet elastic enough to handle heavy shock loads. High twist cover fabric is neoprene impregnated. Length-coding assures you of matching for multiple drives. 1/2-in. width.

ORD. INFO: See chart. Measure width across the outside surface of belt being replaced. Measure length around outside edge, not in groove.

Note: Check manufacturer's number on old belt.

Catalog No.	Length	Mfr's. No.	Wt.	Each
9 HT 1624	24 in.	4L240	4 oz.	\$1.49
9 HT 1628	28 in.	4L280	5 oz.	1.49
9 HT 1629	29 in.	4L290	5 oz.	1.49
9 HT 1630	30 in.	4L300	5 oz.	1.49
9 HT 1632	32 in.	4L320	5 oz.	1.59
9 HT 1633	33 in.	4L330	5 oz.	1.59
9 HT 1634	34 in.	4L340	5 oz.	1.59
9 HT 1635	35 in.	4L350	5 oz.	1.59
9 HT 1636	36 in.	4L360	5 oz.	1.69
9 HT 1637	37 in.	4L370	5 oz.	1.69
9 HT 1638	38 in.	4L380	6 oz.	1.69
9 HT 1639	39 in.	4L390	6 oz.	1.79
9 HT 1640	40 in.	4L400	6 oz.	1.79
9 HT 1641	41 in.	4L410	6 oz.	1.79
9 HT 1642	42 in.	4L420	6 oz.	1.79
9 HT 1648	48 in.	4L480	7 oz.	1.99

CRAFTSMAN® Heavy-duty Motors for farm and industrial equipment like augers, compressors, and grain elevators



Variable-speed Motor

Constant torque at any speed between 300 and 1600 rpm... for conveyors, feed mixers, piston or gear pumps


1/2-HP. Variable speed, constant torque up to 24 oz.-ft. Not for use where motor is expected to provide downhill braking.

CONSTRUCTION: Ball bearings. Solid-state circuitry for infinite speed adjustments from 300 to 1600 rpm. Separate blower motor keeps drive motor cool through total rpm range. Mounts at any angle... drip-proof in horizontal position. NEMA 56, 143T, 145T mounting holes. 5/8-inch diameter by 1 1/4-inch long shaft, 1 1/4x3/16-inch key. Mounting dimensions: 9 1/2x2x7 1/16x15 1/8 inch. Rigid-mount base with 5/16x3, 4 and 5-inch mounting capabilities.

ELECTRICAL INFO: Induction run, 115-volt, 60-Hz., AC. 670 watts at high speed, 1200 watts at low speed. 8-foot, 3-wire cord. Draw from AC power without converting to DC. On-off, reversing switch, speed control, thermal overload protector reset switch located on control panel.


ORDERING INFORMATION: See warranty on opposite page.

9 HT 1260C—Shipping weight 37 pounds \$249.95



Make sure Heavy-duty Motors fit

"A"—length of housing (excluding shaft). "B"—from bottom of base plate to housing top. "C"—bottom of base plate to center of shaft. "D"—maximum width of housing. Measurements in inches.



Cat. No.	A	B	C	D	Cat. No.	A	B	C	D
9 HT 1260C	13 1/16	9 7/16	3 1/2	7 17/32	F9 HT 1209N	16 1/8	10 1/2	5 1/4	15 1/16
9 HT 1240C	9 7/8	8 5/8	3 1/2	6 1/2	F9 HT 12011N	16 1/8	10 1/2	5 1/4	15 1/16
9 HT 1241C	10 5/8	8 5/8	3 1/2	6 1/2	9 HT 1200C	9 1/16	7 3/16	3 1/2	9 7/8
9 HT 1242L	10 3/4	8 5/8	3 1/2	6 1/2	9 HT 1201L	10 1/16	7 3/16	3 1/2	9 7/8
9 HT 1243C	10 5/8	8 5/8	3 1/2	6 1/2	9 HT 1202L	10 1/16	7 3/16	3 1/2	9 7/8
9 HT 1244N	14 1/16	9 1/4	4 1/2	13 3/32	9 HT 1203L	10 1/16	7 3/16	3 1/2	9 7/8
9 HT 1228C	9 7/8	9 1/8	3 1/2	9 1/16	9 HT 1204L	12 29/32	9 11/16	4 1/2	13 1/32
9 HT 1229C	10 11/32	9 1/8	3 1/2	9 1/16	9 HT 1205L	12 29/32	9 11/16	4 1/2	13 1/32
9 HT 1230L	11 1/32	9 1/8	3 1/2	9 1/16	9 HT 1206C	8 1/2	6 21/32	3 1/2	6 1/4
9 HT 1231C	9 7/8	9 1/8	3 1/2	9 1/16	9 HT 1207C	8	6 21/32	3 1/2	6 1/4
9 HT 1232N	15 1/8	9 1/4	4 1/2	13 3/32	9 HT 1208C	9	6 21/32	3 1/2	6 1/4
9 HT 1223C	8 1/2	8 1/2	3 1/2	8 5/8	F9 HT 12012N	14 1/8	11	5 1/4	12 1/16
9 HT 1224C	9 1/2	8 5/8	3 1/2	8 5/8	F9 HT 12013N	16 1/8	11	5 1/4	12 1/16

NOTE FOR ALL MOTORS ON THESE 2 PAGES: NEMA frame sizes are given for all motors. The National Electrical Manufacturers Association (NEMA) is an organization that develops standards for motors, one of which governs motor dimensions. This means any motor of a certain NEMA frame size is interchangeable with another of the same frame size. Important dimensions like base mount and shaft height will be the same.

SHIPPING NOTE: F items (as F9 HT 1209N) from Wausau, Wisc. factory. Pay motor carrier charges from factory. Allow extra time. No C.O.D.'s.

there's a big selection of Heavy-duty and Farm-duty Motors and Accessories in our 1977 Suburban, Farm and Ranch Catalog ask for your FREE copy at your Sears Catalog Selling Unit

SEARS HAS IT

(1 and 2) Capacitor-start Motors for hard-starting equipment

For tools requiring high-starting torque. All induction run except 5-HP motors which are capacitor run.

CONSTRUCTION: Permanently lubricated ball bearings. Fan-cooled. Rigid base mount. Mount in any position... open-frame drip-proof in horizontal position; enclosed motors drip-proof in any position.

ELEC. INFO: 60-Hertz, AC (see volts in chart). No switch or cord. Electrically reversible. Not sparkproof.

ORDERING INFORMATION: See warranty, facing page, shipping note at left.

Catalog Number	HP	RPM	Frame	Base Mount (in.)	Shaft (in.)	Volts	Watts††	Overload protector	Shpg. wt. lbs.	Price
(1) With open-frame drip-proof steel housing.										
9HT1240C	1	1725	143T	4x5 1/2	3/8	115 or 230	1200	Manual reset	32	\$89.99
9HT1241C	1 1/2	1725	145T	5x5 1/2	1/2	115 or 230	1600	Manual reset	37	109.95
9HT1242L	2	1725	145T	5x5 1/2	3/4	115 or 230	2200	None	43	114.95
9HT1243C	2	3450	145T	5x5 1/2	3/4	115 or 230	2400	None	37	114.95
9HT1244N	5	1700	184T	5 1/2x7 1/2	1 1/2	230	5500	Manual reset	91	269.95
F9HT1209N	7 1/2	1725	215T	7x8 1/2	1 3/4	230	7590	None	179	449.00
F9HT12011N	10	1725	215T	7x8 1/2	1 3/4	230	10580	None	203	599.00

(2) With totally enclosed aluminum housing.										
9HT1228C	1	1725	56	3x4 7/8	5/8	115 or 230	1200	Manual reset	35	96.99
9HT1229C	1 1/2	1725	143T	4x5 1/2	3/4	115 or 230	1600	Manual reset	40	129.95
9HT1230L	2	1725	145T	5x5 1/2	3/4	115 or 230	2200	None	46	144.95
9HT1231C	2	3450	145T	5x5 1/2	3/4	115 or 230	2200	None	37	144.95
9HT1232N	5	1700	184T	5 1/2x7 1/2	1 1/2	230	5500	Manual Reset	91	289.95

(2) With totally enclosed steel housing.										
9HT1223C	1/2	1725	56	3x4 7/8	5/8	115 or 230	660	Manual reset	26	72.99
9HT1224C	3/4	1725	56	3x4 7/8	5/8	115 or 230	850	Manual reset	32	76.99

††Full-load input watts

Three-phase Motors

CONSTR.: Re-greaseable ball bearings. Mount in any position. Rigid base mount. Single-end shaft. Cast-iron end brackets. 9 HT 1206C, 9 HT 1207C, 9 HT 1208C are open-frame/drip-proof. All others enclosed; fan-cooled.

ELECTRICAL INFORMATION: Run on 208-230/460-volt, 60-Hz., AC. No switch or cord. Electrically reversible. Use where 3-phase AC power is available.

ORDERING INFORMATION: See warranty, facing page, shipping note at left.

Catalog No.	HP	RPM	Frame	Base mount	Watts††	Shaft	Shpg. wt.	Price
With steel housing.								
9 HT 1206C	1/2	1725	56	3x4 7/8 in.	620	5/8 in.	20 lbs.	\$54.95
9 HT 1207C	1 1/2	1725	143T	4x5 1/2 in.	320	3/4 in.	19 lbs.	49.95
9 HT 1208C	1	1725	143T	4x5 1/2 in.	972	3/4 in.	39 lbs.	99.95
9 HT 1201L	1 1/2	1725	145T	5x5 1/2 in.	1404	7/8 in.	24 lbs.	64.95
9 HT 1202L	2	1725	145T	5x5 1/2 in.	1816	7/8 in.	43 lbs.	119.95
9 HT 1203L	2	3450	145T	6x5 1/2 in.	1864	7/8 in.	45 lbs.	126.95
With aluminum housing.								
9 HT 1204L	3	1725	182T	4 1/2x7 1/2 in.	2750	1 1/8 in.	44 lbs.	142.95
9 HT 1205L	5	1725	184T	5 1/2x7 1/2 in.	4320	1 1/8 in.	66 lbs.	189.95
F9 HT 12012N	7 1/2	1725	213T	5 1/2x8 1/2 in.	4508	1 3/8 in.	119 lbs.	249.00
F9 HT 12013N	10	1725	215T	7x8 1/2 in.	5980	1 3/8 in.	139 lbs.	299.00

Low Voltage and No Voltage Protective Switches.

ORDERING INFORMATION:

For single-phase motors up to 2 HP. 120-v. coils.


9 HT 12024—Shipping weight 2 pounds \$39.99

For single or three-phase motors up to 2 HP. 230-v. coils.

9 HT 12022—Shipping weight 2 pounds \$44.99

For single-phase motors up to 2 HP or three-phase motors up to 5 HP. Also provides motor protection. 230-v. coils.

9 HT 12023—Shipping weight 4 lbs. 15 oz. \$79.99



(3 thru 8) Line Shaft, Accessories

Mount line shaft, couplings and collar on bench or as overhead drive. Use with 1/2-HP or larger motor. Line Shaft—use 1/2-inch for light tools; 3/4 or 1-inch for heavier machines and larger motors. Rigid Coupling—use to connect shaft to couplings. Flexible Coupling—use to connect motor to line shaft. Line Shaft Collar—helps prevent endwise drift. Has 3/4-inch bore with bushings for 1/2 and 3/4-inch shafts. Pillow Block—supports shaft... permanently-lubricated bronze bearings.

ORDERING INFORMATION:

Key	Catalog No.	Size	Accessory	Shpg. wt.	Each
(3)	9 HT 28394	1/2, 3/4 in.	Rigid Coupling	8 oz.	\$3.49
(4)	9 HT 2833	1/2x24 in.	Steel Line Shaft	1 lb.	8 oz. 1.89
	9 HT 2834C	1/2x48 in.	Steel Line Shaft	3 lbs.	2.99
	9 HT 2830C	3/4x48 in.	Steel Line Shaft	5 lbs.	3.99
	9 HT 2835C	3/4x48 in.	Steel Line Shaft	7 lbs.	4.99
(5)	9 HT 27501	1/2 in.	Pillow Block	11 oz.	4.50
	9 HT 27502	3/4 in.	Pillow Block	11 oz.	4.50
	9 HT 27503	1 in.	Pillow Block	11 oz.	4.50
(6)	9 HT 28255	1/2, 3/4, 1 in.	Line Shaft Collar	6 oz.	1.49
(7)	9 HT 28404	1/2, 3/4 in.	Flexible Coupling	13 oz.	4.99
(8)	9 HT 2820	1/4 in.	Cup Oiler	2 oz.	29c

(9 thru 11) CRAFTSMAN® V-pulleys for motors or machines

CONSTRUCTION: Zinc alloy, aluminum finish. Grooves machined to maximum accuracy... helps eliminate belt slipping, power loss. Bore reamed to exact size.

Determine motor pulley diameter by multiplying machine pulley diam. by machine rpm wanted. Divide this figure by motor rpm.

Determine machine pulley diameter by multiplying motor pulley diam. by motor's rpm rate. Divide this figure by machine rpm you want.

(9) Single-groove V-pulleys with hubs.

Socket-head setscrew. Fit 3/8 (3L) or 1/2-inch (4L) V-belts, except 9 HT 2800 which is for 3/8-inch (3L) belt only. 3/8, 1/2-inch bores have standard keyway.

ORDERING INFORMATION:

Catalog Number	Outside diameter	Bore size	Wt. lbs. oz.	Each
9 HT 2800	1 1/2 in.	1/2 in.	4	99c
9 HT 28011	2 in.	1/2 in.	6	1.09
9 HT 28012	2 in.	3/4 in.	6	1.09
9 HT 28021	2 1/2 in.	1/2 in.	7	1.39
9 HT 28022	2 1/2 in.	3/4 in.	7	1.39
9 HT 28031	3 in.	1/2 in.	9	1.69
9 HT 28032	3 in.	3/4 in.	9	1.69
9 HT 28041	4 in.	1/2 in.	11	1.99
9 HT 28042	4 in.	3/4 in.	12	1.99
9 HT 28051	5 in.	1/2 in.	13	2.49
9 HT 28052	5 in.	3/4 in.	14	2.49
9 HT 28061	6 in.	1/2 in.	1	3.29
9 HT 28062	6 in.	3/4 in.	1	3.29

*These pulleys are spoke type.

(10) Cone V-pulleys.

Three or four-step design. Socket-head setscrew. Pulleys are made to fit 3/8 inch and 1/2-inch V-belts. Pulleys with 3/8-inch bores have standard keyway.

ORDERING INFORMATION:

Catalog Number	Bore (in.)	Step diam. (inches)	Wt. lbs. oz.	Each
9HT27881	1 1/2	3 3/8, 2 1/2, 2	1	1.39
9HT27882	1 1/2	3 3/8, 2 1/2, 2	1	2.39
9HT27921	1 1/2	4, 3 1/2, 2 1/2, 2	1	7.49
9HT27922	1 1/2	4, 3 1/2, 2 1/2, 2	1	8.49
9HT27931	1 1/2	5, 4, 3, 2	1	10.49
9HT27932	1 1/2	5, 4, 3, 2	1	12.49


(11) Hubless Single-groove V-pulleys.

Socket-head setscrew. Fit 3/8-inch (3L) or 1/2-inch (4L) V-belts, 2 1/2, 3-inch diameter pulleys in 3/8-inch bores have standard keyways.

ORDERING INFORMATION:

Catalog Number	Outside diameter	Bore in.	Shpg. wt.	Each
9 HT 29011	2 in.	1/2	5 oz.	\$1.09
9 HT 29012	2 in.	3/4	5 oz.	1.09
9 HT 29021	2 1/2 in.	1/2	6 oz.	1.39
9 HT 29022	2 1/2 in.	3/4	6 oz.	1.39
9 HT 29031	3 in.	1/2	7 oz.	1.69
9 HT 29032	3 in.	3/4	8 oz.	1.69

CRAFTSMAN® Bench Grinders • Full one-year warranty • Rubber-mounted base to reduce vibration

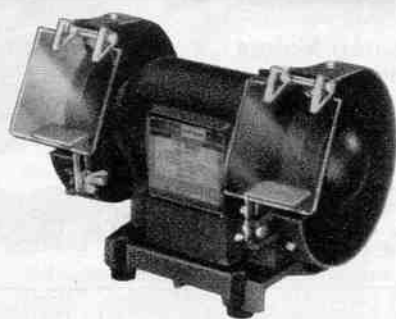

CRAFTSMAN® Hobby Grinder with two 5x1/2-in. wheels \$39⁰⁰

CRAFTSMAN® 1/4 HP Grinder with two 6x1/2-inch grinding wheels \$49⁰⁰

CRAFTSMAN® 1/2 HP Bench Grinder with two 6x3/4-inch wheels \$89⁰⁰

MOTOR: Direct-drive, shaded-pole motor, no-load speed of 3580 rpm. Permanently lubricated sleeve bearings for smooth operation.

GRINDING WHEELS: Two 5x1/2-inch aluminum-oxide grinding wheels (medium-fine and medium-coarse). 7 3/4-inch clearance between wheels. Removable wheel guards.

HOUSING: ABS Thermoplastic housing and base, the same tough housing material used in making telephones. Rubber mounts to help reduce vibration. 10 3/8 inches wide, 5 inches deep, 7 1/16 in. high. Top-mounted slide switch. 1/2x24-in. thread shaft. Adjustable Lexan® plastic shatter-resistant eye shields. Adjustable tool rests for the right angle when sharpening or grinding.

ELECTRICAL INFO: 115 volts, 60 Hz., AC. 135 maximum idle watts. UL listed. 6-foot, 3-wire cord.

ORDERING INFORMATION:
See warranty, safety note below.
9 HT 1931C—Wt. 10 lbs. . . . \$39.00

MOTOR: 1/4 rated HP (develops 1/3 HP). Split-phase, induction motor. No-load speed of 3580 rpm. Direct drive . . . no internal brushes to replace, no belt to break or wear out. Permanently lubricated roller bearings for long life, smooth running.

GRINDING WHEELS: Two 6x1/2-inch aluminum-oxide grinding wheels (medium-fine and medium-coarse). 10 3/8-inch clearance between wheels. Removable wheel guards for easy wheel changes.

HOUSING: ABS Thermoplastic housing, the same tough housing material used in making telephones. Rubber mounts help reduce vibration. 14 1/8 inches wide, 6 1/2 inches deep, 9 3/16 inches high. Top-mounted slide switch. 1/2x20-inch thread shaft. Adjustable Lexan® plastic shatter-resistant eye shields. Swivel lamp directs light on your work. Adjustable tool rests for the right angle when grinding or sharpening. Adjustable spark arrestors and removable quench tray for cooling hot metals.

ELECTRICAL INFORMATION: 115 volts, 60 Hertz, AC. 271 maximum idle watts. UL listed. 6-foot, 3-wire cord.

ORDERING INFORMATION: See warranty and safety note below.
9 HT 1932C—Shipping weight 20 lbs. . . . \$49.00

CRAFTSMAN® 1/2 HP Bench Grinder. Like bench grinder above, except with 1/2 rated HP (develops 1/2 HP) and two 6x3/4-in. aluminum-oxide grinding wheels. 286 max. idle watts.

ORDERING INFORMATION:
See warranty and safety note below.
9 HT 1933C—Shipping weight 21 lbs. . . . \$69.00

MOTOR: 1/2 rated HP (develops 3/4 HP). Split-phase, induction motor. No-load speed of 3580 rpm. Direct drive, no internal brushes to replace, no belt to break or wear out. Permanently lubricated ball bearings for long life.

GRINDING WHEELS: Two 6x3/4-inch aluminum-oxide grinding wheels (medium-fine and medium-coarse). 11 1/8-inch clearance between wheels. Removable wheel guards for easy wheel changes.

HOUSING: Flat-face aluminum housing for greater accessibility to grinding wheels. Die-cast aluminum base with rubber mounts to help reduce vibration. 15 3/8 inches wide, 7 3/8 inches deep, 10 1/4 inches high. Front-mounted toggle switch. 1/2x20-inch thread shaft. Adjustable Lexan® plastic shatter-resistant eye shields. Flexible 16-inch gooseneck lamp directs light where you need it for precision work. Adjustable tool rests for the right angle when grinding or sharpening. Adjustable spark arrestors and removable quench tray for cooling metals.

ELECTRICAL INFO: 115 volts, 60 Hertz, AC. 300 maximum idle watts. UL listed. 6-foot, 3-wire cord.

ORDERING INFORMATION:
See warranty and safety note below.
9 HT 1934C—Shipping weight 28 lbs. . . . \$89.00

FULL ONE YEAR WARRANTY ON CRAFTSMAN® BENCH GRINDERS: If this CRAFTSMAN® Bench Grinder fails to give complete satisfaction within one year from the date of purchase, return it to the nearest Sears store throughout the United States and Sears will replace it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

SAFETY NOTE: Play it safe! Protect your eyes . . . be sure to wear safety goggles when using bench grinders on these two pages. See page 75 for our selection of safety equipment and protective glasses.

CRAFTSMAN® Grinder-Sander Outfit

Includes grinder with 1/2 HP Motor, one 6x3/4-inch grinding wheel, gooseneck worklight, sanding attachment and stand

\$110⁰⁰

MOTOR: 1/2 rated HP (develops 3/4 HP). Split-phase induction motor. No-load speed of 3580 rpm. Direct drive. Permanently lubricated ball bearings.

GRINDING WHEEL, SANDER: One 6x3/4-inch medium-coarse aluminum-oxide grinding wheel. Removable wheel guard. 8-inch sanding disc with 4x8 3/4-inch table that adjusts 45° to 90°. With fine, medium, coarse sanding discs.

HOUSING: Aluminum housing with rubber mounts to help reduce vibration. 17 3/8x7 3/8x10 1/4 inches high. Front-mounted toggle switch. 1/2x20-inch thread shaft. Flexible 16-in. gooseneck lamp. Grinder side has adjustable tool rest, spark arrestor, and adjustable Lexan® plastic eye shield. Removable quench tray for cooling hot metals.

STAND: See stand (1) at right.

ELECTRICAL INFORMATION: 110-120 volts, 60 Hz., AC. UL listed. 6-foot, 3-wire cord. Maximum idle watts: 300.

ORDERING INFORMATION:
See warranty and safety note above.

Shipping weight 43 pounds.
9 HT 19397C2 \$110.00

Grinder/Sander without stand.
Shipping weight 32 pounds.
9 HT 19345C \$99.99



Tubular Steel Stand
\$19⁵⁰



Pedestal Stand
\$39⁵⁰



Carbide Wheel Dresser
\$9⁹⁵



Steel Wheel Dresser
\$4⁴⁹

(1) Tubular Steel Grinder Stand

CONSTRUCTION: Tubular steel frame, 32 inches high. Wide leg span for stability, minimal vibration. Fitted with rubber feet for quiet operation. Measures 26 inches wide, 24 inches deep. Fits all CRAFTSMAN® Grinders except 9 HT 1931C above and former 9-1964.

ORDERING INFO:
Shpg. wt. 11 lbs.
9 HT 29647C . . \$19.50

(2) CRAFTSMAN® Pedestal Stand

CONST.: Heavy-duty stand with tubular steel post, 2 3/4 in. in diameter. Overall height, 32 1/2 in. Cast-iron base bored for bolting to floor (bolts not incl.). 7 13/16x8 7/8-inch table fits all CRAFTSMAN® grinders except 9 HT 1931; 1932, 1933 above and former 9-1964.

ORDERING INFO:
Shpg. wt. 31 lbs.
9 HT 2964C . . \$39.50

(3) Carbide Dresser for grinder wheels

Carbide rod enclosed in plastic handle. For dressing, shaping. **ORDERING INFORMATION:**
9 HT 6491—Wt. 12 oz. . . \$9.95

(4) Steel Dresser for grinder wheels

High-carbon steel cutters. For dressing, shaping, and removing glaze from your grinding wheels. **ORDERING INFO:** Wt. 2 lbs. 2 oz. 9 HT 6492 \$4.49
Extra Cutters for above. Package of 4.
9 HT 6495—Wt. 2 oz. . Pkg. 59c

- Adjustable tool rests for the right angle when sharpening
- Permanently lubricated bearings for long life

- Removable wheel covers let you change wheels with ease
- Adjustable shatter-resistant Lexan® plastic eye shields



For more information on
CRAFTSMAN®
Bench Power Tools
send for our
FREE BOOKLET
... 39 HT 7499

CRAFTSMAN® 3/4-HP Bench Grinder
with two 7x3/4-inch wheels
\$119⁰⁰

MOTOR: 3/4 rated HP (develops 1 HP). Split-phase, induction motor. No-load speed of 3580 rpm. Direct drive... no internal brushes to replace, no belt to break or wear out. Permanently lubricated ball bearings for extended motor life and smooth operation.

GRINDING WHEELS: Two 7x3/4-inch aluminum-oxide grinding wheels (medium-fine and medium-coarse). 12-inch clearance between wheels. Removable wheel guards let you change wheels with ease.

HOUSING: Flat-face housing for greater accessibility to grinding wheels. Aluminum housing, die-cast aluminum base with rubber mounts to help reduce vibration. 17 1/2 inches wide, 7 3/4 inches deep, 10 3/4 inches high. Front-mounted toggle switch. 1/2x20-inch threaded shaft. Dust chutes direct grindings away from operator. Adjustable Lexan® plastic shatter-resistant eye shields. Flexible 16-inch gooseneck lamp directs light on your work. Adjustable tool rests for the right angle when grinding or sharpening. Adjustable spark arrestors and oversized 6 1/2x3 1/8-inch quench tray for cooling metals.

ELECTRICAL INFORMATION: 115 volts, 60 Hertz, AC 325 maximum idle watts. UL listed. 6-foot, 3-wire cord.

ORDERING INFORMATION: See warranty and safety note on facing page.
9 HT 1935C—Shipping weight 35 pounds \$119.00



Our best Bench Grinder has our most powerful
1-HP motor with two 8x1-inch grinding wheels
\$149⁰⁰

MOTOR: 1 rated HP (develops 1 1/2 HP). Capacitor-start, split-phase, induction motor. No-load speed of 3580 rpm. Direct drive... no internal brushes to replace, no belt to break or wear out. Permanently lubricated ball bearings for smooth operation and long life.

GRINDING WHEELS: Two 8x1-inch aluminum-oxide grinding wheels (medium-fine and medium-coarse). 12-inch clearance between wheels. Removable wheel guards let you change wheels with ease.


HOUSING: Flat face housing for greater accessibility to grinding wheels. Aluminum housing, die-cast aluminum base with rubber mounts to help reduce vibration. 20 inches wide, 11 1/4 inches deep, 12 1/2 inches high. Front-mounted rocker on/off switch. 3/8x18-inch threaded shaft. Dust chutes direct grindings away from operator. Adjustable Lexan® plastic shatter-resistant eye shields. Flexible 16-inch gooseneck lamp directs light on your work... with separate on/off switch. Adjustable tool rest for the right angle when grinding or sharpening. Adjustable spark arrestors and built-in quench tray for cooling metals.

ELECTRICAL INFORMATION: 110-120 volts or 230 volts, 60 Hertz, AC. 340 maximum idle watts. UL listed. 6-foot, 3-wire cord.


ORDERING INFORMATION: See warranty and safety note on facing page.
9 HT 1936L—Shipping weight 48 pounds \$149.00



Grinding Attachment
for drill bits
\$9⁹⁹

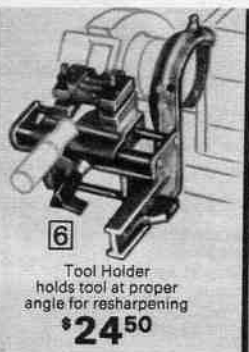

Tool Holder
holds tool at proper
angle for sharpening
\$24⁵⁰

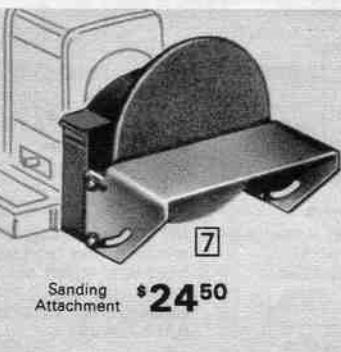

Sanding Attachment
\$24⁵⁰

**Sharpener and
reconditioner
for saw blades**



Whatever the job...
your CRAFTSMAN®
Bench Grinder
can do more with
these Accessories

YOU CAN DO MORE...

\$59⁹⁹

(5) Grinding Attachment
Locks drill bit at angle for reshaping. For twist drill sizes: 1/8 to 3/4 inches, Nos. 1 to 30, A to Z, 3 to 19 millimeters.
CONSTRUCTION: Hardened steel body and cross bar. Precision-built aluminum frame. Easily adjusts for all popular drill point angles. Use with wheel (9 HT 64222) on following pg. Fits all CRAFTSMAN® grinders.
ORDERING INFO:
Shpg. wt. 2 lbs. 8 oz.
9 HT 6677 \$9.99

(6) Tool Holder.
Holds tools at proper angle for sharpening. Fine feed adjustment. For hollow or conventional grind screwdrivers, plane blades, chisels, scraper blades, etc. Blade guide supplied for sharpening blades and garden tools.
CONSTRUCTION: Made of cast aluminum and steel, plastic knobs. 3-inch rack and pinion travel. Fits all CRAFTSMAN® grinders.
ORDERING INFO:
Shpg. wt. 5 lbs. 8 oz.
9 HT 19595 .. \$24.50

(7) Disc Sanding Attachment.
CONSTRUCTION: Made of steel. 8-in. disc with 4x8 3/4-inch table. Just remove wheel and wheel housing to attach to grinder. Work table adjusts from 45° to 90°. Includes attaching hardware, 3 sanding discs (fine, medium, coarse), adapter for 1/2 or 3/8-inch shafts. Fits all CRAFTSMAN® grinders except 9-1931, 1932, 1933.
ORDERING INFORMATION:
Shipping weight 8 pounds.
9 HT 19493 \$24.50
Extra Sanding Discs.
Pressure-sensitive back. 8-in. diam.
GRIT, ORDER INFO: Package of 6.
9HT25381—Fine. Wt. 9 oz. ... \$3.99
9HT25382—Med. Wt. 11 oz. ... 3.99
9HT25383—Coarse. Wt. 13 oz. ... 3.99

Recondition and sharpen saw blades by adding this attachment to your bench grinder. Does every blade reconditioning job but setting of blade teeth. Includes 6-inch sharpening wheel that replaces grinding wheel.

CONSTRUCTION: Steel and die-cast aluminum construction. Attach to either side of any 6-inch or larger grinder. Swing arm to side when you are not sharpening. Locating cone automatically centers blade for accurate sharpening of blades.


CAPACITY: Handles circular blades (except carbide-tipped disposable blades) up to 16 inches in diameter. With 6-inch material grinding wheel that fits 1/2, 3/8, or 3/4-inch arbors. Cone fits up to 2-inch round, diamond-shaped, and square blade arbor holes.

ORDERING INFORMATION:
9 HT 23393—Shipping weight 14 pounds \$59.99

More Accessories on next page



YOU CAN DO MORE...

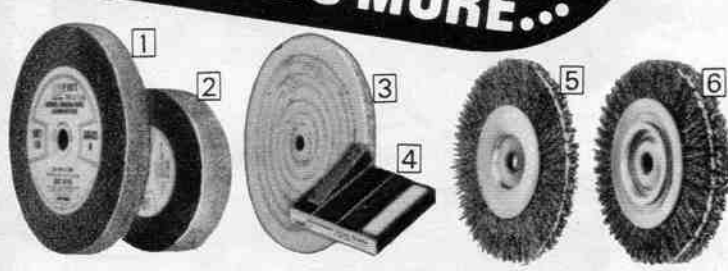

(1 and 2) CRAFTSMAN® Grinding Wheels

(1) Grinding Wheels

USES: Fine grit for knives, keen-edge tools, finish-grinding, polishing. Medium-fine grit for axes, wood-cutting tools, preparation for finishing. Medium-coarse grit for machine shop use.

CONST.: Aluminum-oxide grains. 4, 5, 6 and 7-in. wheels have 5/8-in. center hole. 4-in. wheels have bushings for 1/2 and 3/8-in. shafts. 5, 6 and 7-in. wheels have bushings for 1/2-in. shafts. 8-in. wheels have 3/4-in. center hole, bushings for 3/8-in. shaft.

GRIT, SIZE, ORDERING INFO: See safety rules at right.

Size	Min. shaft	Catalog Number	Wt. lbs. oz.	Each	5 for
Fine 100-grit					
4x1/2	3/8 in.	9HT64313	7 1/2	\$1.79	\$7.49
5x3/4	1/2 in.	9HT64317	1 2	2.79	11.99
6x1/2	3/4 in.	9HT64319	1 15	2.99	12.99
6x3/4	1/2 in.	9HT64321	1 12	3.79	15.99
7x1	1/2 in.	9HT64353	3 2	4.79	20.49
8x1	3/4 in.	9HT64354	4 4	5.49	23.99

Medium-fine, 60 grit					
4x1/2	3/8 in.	9HT64203	1 8	\$1.79	\$7.49
5x3/4	1/2 in.	9HT64207	1 3	2.79	11.99
6x1/2	3/4 in.	9HT64209	1 5	2.99	12.99
6x3/4	1/2 in.	9HT64211	1 12	3.79	15.99
7x1	1/2 in.	9HT64214	3 2	4.79	20.49
8x1	3/4 in.	9HT64355	4 4	5.49	23.99

Medium-coarse, 36 grit					
4x1/2	3/8 in.	9HT64351	1 8	\$1.79	\$7.49
5x3/4	1/2 in.	9HT64356	1 5	2.79	11.99
6x1/2	3/4 in.	9HT64352	1 5	2.99	12.99
6x3/4	1/2 in.	9HT64232	1 14	3.79	15.99
7x1	1/2 in.	9HT64235	3 2	4.79	20.49
8x1	3/4 in.	9HT64236	4 6	5.49	23.99

Grinding Wheel for carbide-tip tools

USES: For sharpening carbide-tip tools, either wet or dry.

CONSTRUCTION: Fine grit. Vitrified (crystallized) green silicon carbide. 6x1/2 inch thick. Center hole 5/8-in. Bushings for 1/2-inch shafts.

ORDER INFO: See safety rules below. 9 HT 64242—Shpg. wt. 1 lb. \$4.99

(2) Grinding Wheel for twist drills

USES: For sharpening twist drills.

CONST.: Aluminum oxide grains. 6x1 inch thick. Center hole 5/8-in. Bushings for 1/2-in. shafts.

ORDER INFO: See safety rules below. 9 HT 64222—Wt. 2 lbs. 7 oz. Each \$4.49 5 for \$20.20

SAFETY RULES

(1) Do not grind on side of wheels. (2) Use only with straight relieved flanges as large as, or larger than shown on table below. (3) Use guard and shatter-proof glass shield covering 3/4 of wheel. (4) Never exceed rpm shown. (5) Be sure to wear safety goggles. (6) Stand aside for 1 minute after starting wheel. (7) Follow instructions shown on wheels. Do not use on wood.

Wheel diam. inches	4	5	6	7	8
Flange diam. inches	1 1/4	1 3/4	2	2 1/2	3
Max. RPM	6207	4966	4138	3600	3600

(5) CRAFTSMAN Wire Wheels

USES: Remove rust, paint. Use 2 or more in tandem for wide work areas.

ORDER INFO: 1/2-in. center holes also bushed for 3/8-in. shaft. 5/8-in. center holes bushed for 1/2-in. shaft.

Catalog Number	Diam. in.	Hole in.	Width in.	Shpg. wt. lbs. oz.	Each
Coarse					
9HT64811	4	1 1/2	7/16	11	\$1.99
9HT64812	6	5/8	9/16	15	2.29
9HT64816	7	5/8	10/16	1	3.29
9HT64813	8	5/8	11/16	1	3.49

Fine					
9HT64823	4	1 1/2	3/8	11	\$2.29
9HT64824	6	5/8	9/16	15	2.59
9HT64815	7	5/8	10/16	1	3.89

Wide-face Coarse Wheels					
9HT64834	6	5/8	1	12	\$4.79
9HT64835	8	5/8	1 1/2	3	6.99


(6) CRAFTSMAN Commercial Production Wire Wheel

CONST.: 2 sections; heavy-duty and carbon steel wire. 6-in. diam. face, 3/4 in. thick, 5/8-in. arbor hole.

ORDERING INFORMATION: 9 HT 64814—Wt. 1 lb. 14 oz. \$6.99

CRAFTSMAN® Portable 3-inch Lathe

Turns stock up to 8 inches long... yet you can set up and go to work in an area as small as 2x1 feet

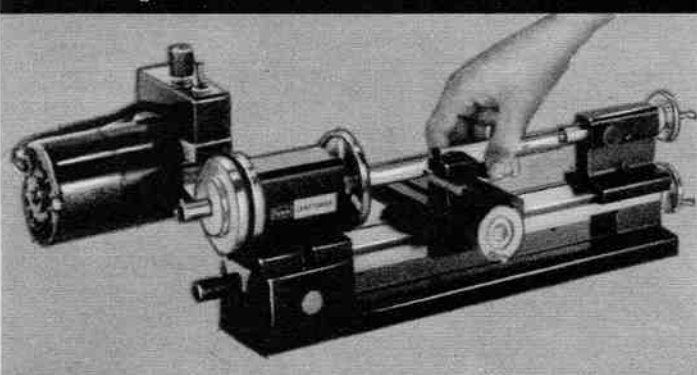

\$219⁰⁰

Use for lightweight precision metal work. Ideal for the hobbyist, for use in workshops and model making. With proper accessories (7 thru 17) sold below you can cut threads, do mill work, end boring. You can get much of the same versatility as our bigger lathes, even power feed (8).

SPEEDS: Variable speed control. Adjust belt drive system speeds from 100 to 2000 rpm. Powered by 1/2-HP motor.

CAPACITY, CONTROLS: 8 inches between centers, 3 1/2 inch swing over bed, 1 3/4 inch swing over cross-slide. Manual cross feed carriage and longitudinal feeds. Calibrated headstock swivels for taper turning... removes for use with milling attachment (17). Spindle nose has 3/4-in. 16 thread and a Morse No. 1 internal taper. Travel of crossslide 2 1/4 in. Travel of tailstock 1 1/2 in. Handwheels are graduated in .001 increments.

CONSTRUCTION: Solid nickel/brass alloy bed with fully dovetailed slides with adjustable gibs for accurate saddle movement along bed. Headstock has a permanently lubricated adjustable ball bearing with a 1 1/2 spindle bore. Overall measurements: 18x7 1/2x6 inches high.

ACCESSORIES: Includes V-belt, faceplate and carrier, two dead centers, two hexagon keys, tool post and one 1/4-inch tool bit, complete set up and operating instructions.

ELEC. INFO: 110-115 volt, 60 Hertz, AC. 8-foot, 3-wire cord. 300 watts.

ORDERING INFORMATION: See accessories for this lathe sold below, also 6-piece Formed Tool Bit Set (16) on page 33. See warranty page 35. Wear safety goggles... see page 75.

9 HT 2142C—Shipping weight 20 pounds \$219.00



(7 thru 17) Accessories for 3-inch Lathe above

(7) Live Center. Use for holding work for fast spinning.

ORDERING INFORMATION: 9 HT 2142B—Wt. 8 oz. \$12.95

(8) Power Feed. Separate gear motor drives lead screw. Feed is from right to left only, feeds at approximately 1-inch per minute.

ORDER INFO: 9 HT 21429—Wt. 4 lbs. 7 oz. \$39.95

(9) Cut-off Tool and Holder.

ORDERING INFORMATION: 9 HT 21425—Wt. 10 oz. \$19.95

(10) Steady Rest. Helps prevent whipping or wobble.

ORDERING INFORMATION: 9 HT 21426—Wt. 15 oz. \$12.95

(11) Two Position Tool Post. Holds cutting bits for turning.

ORDERING INFORMATION: 9 HT 21427—Wt. 7 oz. \$6.95

(12) Vertical Milling Column. Solid aluminum base and dovetailed vertical column. Fits on lathe where headstock was attached, attach headstock to column. Cut grooves, keyways, flycutting.

ORDERING INFORMATION: Shipping weight 7 lbs. 2 oz. 9 HT 21424 \$59.95

(13) Collets. Set of 5. Standard w.w. collets used by watchmakers.

1/16, 1/8, 3/16, 1/4, 5/16-in. sizes. Includes drawbar and collet adaptor.

ORDERING INFORMATION: Shpg. wt. 1 lb. 5 oz.

9 HT 21432 Set \$49.95

(14) 3-Jaw Self-centering Chuck. Reversible jaws hold work to 2 1/4 inch diameter.

ORDERING INFORMATION: Shipping weight 1 lb.

9 HT 21422 \$49.95

(15) 4-Jaw Chuck. Reversible jaws move independently. Hold work to 2 1/4 inches in diameter.

ORDERING INFORMATION: Shipping weight 1 lb. 3 oz.

9 HT 21423 \$49.95

(16) Tailstock Chuck. 0 to 1/4 in. Jacobs chuck, Nos. 0 and 1 Morse arbor to adapt to lathe spindle. Key.

ORDERING INFORMATION: 9 HT 21421—Wt. 10 oz. \$12.95

(17) Screw Cutting Attachment. Cut American and Metric thread, left and right-hand leads. Internal and external threads. Instructions.

ORDERING INFO: Unassembled. Shipping weight 2 lbs. 7 oz.

9 HT 21431 \$89.95

(3 thru 6) Buffing Wheels, Compound, Wire Wheels

(3) CRAFTSMAN Buffing Wheels

Spiral-sewn muslin with raked edges. 30 layers. Thread count 64x64 threads per in. Fits 1/2 or 3/8-in. shafts. Use 2 or more for wide work areas.

SIZES, ORDER INFO: Use with (4).

Catalog No.	Diameter	Shpg. wt.	Each
9 HT 64933	4 inches	3 oz.	99c
9 HT 64931	6 inches	6 oz.	\$1.69
9 HT 64932	8 inches	8 oz.	2.49

(4) CRAFTSMAN Buffing Compound Set

Four 3-oz. bars: emery (black), red rouge, white, Tripoli (brown).

ORDERING INFO: Use with (3) above. 9 HT 2896—Wt. 1 lb. 8 oz. Set \$1.59

CRAFTSMAN Buffing Compound for metal, plastic (not shown). 3-ounce bar.

ORDERING INFO: Use with (3) above. 9 HT 2865—Wt. 7 oz. Bar 89c

White Rouge Buffing Compound (not shown). For stainless steel, aluminum, cast brass, chrome. 3-oz. bar.

ORDERING INFORMATION: 9 HT 2860—Wt. 8 oz. Bar 89c

Precision 12 $\frac{1}{4}$ -inch Metal-turning Lathe gives you 16 speeds and 54 feeds...cutting accuracy tested to 1/1000 of an inch




Lathe with floor model cabinet

\$1795⁰⁰

Lathe without floor model cabinet

\$1595⁰⁰

Lathe includes this manual with valuable hints on care, operations, attachments, Machinists' tables, drawings and diagrams also included.

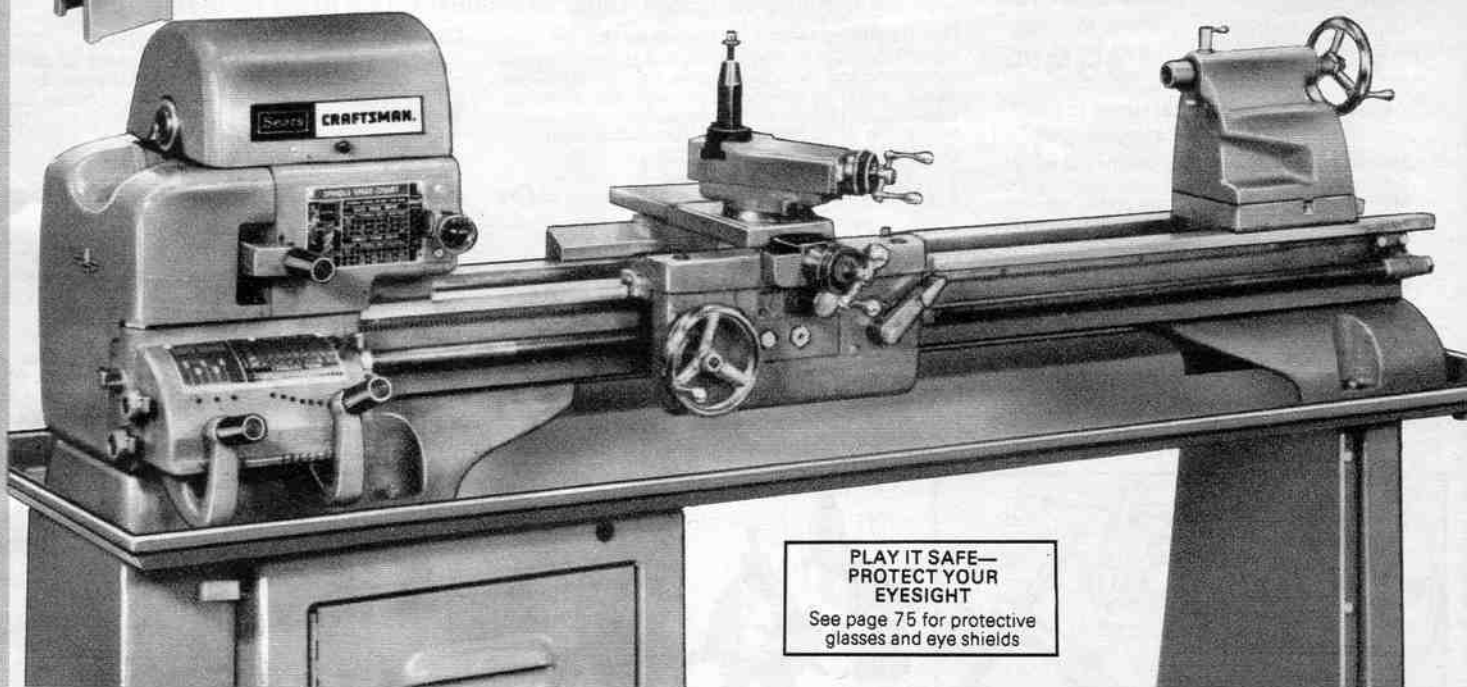

**PLAY IT SAFE—
PROTECT YOUR
EYESIGHT**

See page 75 for protective glasses and eye shields

Lathe with Floor-model Cabinet. Back-geared, screw-cutting lathe.

SPEEDS: 28, 45, 70, 83, 112, 134, 211, 345 rpm in back gear drive; 164, 266, 418, 500, 685, 805, 1270, 2072 rpm in direct drive.

CAPACITY, CONTROLS: 12 $\frac{1}{4}$ -in. swing over bed; 12-in. swing over saddle wings; 7 $\frac{3}{4}$ -in. swing over cross slide; 36-in. between centers. Carriage has reversible power cross, longitudinal feeds; 6 $\frac{1}{2}$ -in. cross, slide travel; $\frac{1}{2}$ -in. diam. feed screw with 8 Acme threads per in.; 2 $\frac{1}{4}$ -in. compound rest travel; $\frac{3}{4}$ x $\frac{7}{8}$ -in. slot in tool post takes $\frac{3}{8}$ -in. bits or holder for $\frac{1}{4}$ -in. bits. Headstock has 2 $\frac{1}{2}$ -in. spindle bore; $\frac{1}{2}$ -in. collet capacity; 1 $\frac{1}{2}$ -in. spindle nose with 8 threads; No. 3 Morse taper with No. 2 reducing sleeve. Tailstock with 1 $\frac{1}{2}$ -in. diam. spindle bored for Number 2 Morse taper; 2 $\frac{3}{4}$ -in. spindle travel; spindle graduated in $\frac{1}{16}$ ths of an in. from 0 to 3 in.; $\frac{3}{4}$ -in. tailstock setover for taper turning. Gear box quickly selects 54 feeds from .0042 to .250 in. Cuts 4 to 240 Standard threads per in., right or left hand. Threading dial shows time to engage half-nuts for successive cuts. Micrometer graduated feed-screw collars with locks for quick dialing. Base of compound rest swivels 180°...locks in any position. Sixty-hole indexing mechanism for dividing operations like fluting. 12 pitch back gears at 6 to 1 ratio, oil-impregnated bearings. Horizontal countershaft drive. Lever release for quick speed changes.

CONSTRUCTION: Semi-steel bed cast in 1 piece; bed ways align to $\frac{1}{1000}$ of an inch. Timken® tapered roller bearings absorb both radial and thrust loads...help keep friction at a minimum for long, accurate service. 4-step machine pulley, 2-step motor pulley. Overall measures 63x27x20 in. high.

ACCESSORIES: Includes "V" belt, two 60° centers, tool post, reducing sleeve for headstock centers, wrenches, set-up and operating instructions.

CABINET: Floor-model cabinet stand of heavy-gauge steel. 62 $\frac{1}{2}$ in. long, has rigid pedestal of $\frac{3}{16}$ -in. plate steel. Built-in chip pan with drain outlet. Underneath drive. Column encloses motor and countershaft (motor not incl.). Both countershaft and belt handles extend outside of cabinet. Overall dimensions: 63x19x48 inches high.

ORDERING INFORMATION: Chuck, bit and motor not included. Use at least $\frac{1}{2}$ -HP, $\frac{5}{8}$ -in. shaft, 1725-rpm motor. See motors on pages 26 and 27. Also see full, one-year tool warranty on page 35.

9 HT 2899N—Shipping weight 505 lbs.\$1795.00

Lathe without floor-model Cabinet.

9 HT 2891N—Shipping weight 348 lbs.\$1595.00

*Within 2 inches of chuck jaws

Sears Has a Credit Plan to Suit Most Every Need See Big Book or ask for details



Brass Padlocks

Low as **\$299**



Security Cables

low as **\$199**

(1) Brass Padlocks.

CONSTRUCTION: Solid brass case for indoor-outdoor use. Steel-plated double-locking shackle is case hardened to resist sawing and filing. 5-pin tumbler locking mechanism. Includes 2 keys.

CASE WIDTH, ORDER INFO:

1-inch. $\frac{3}{4}$ -inch clearance.

9 HT 58421—Wt. 5 oz.\$2.99

1 $\frac{1}{4}$ -inch. $\frac{13}{16}$ -inch clearance.

9 HT 58422—Wt. 6 oz.\$3.49

1 $\frac{1}{2}$ -inch. $\frac{13}{16}$ -inch clearance.

9 HT 58423—Wt. 8 oz.\$4.79

2-inch. $\frac{1}{2}$ -inch clearance.

9 HT 58424—Wt. 14 oz.\$6.99

2 $\frac{3}{4}$ -inch. $\frac{13}{16}$ -inch clearance.

9 HT 58425—Wt. 1 lb. 3 oz.\$9.49

(2) Security Cables.

CONSTRUCTION: Galvanized preformed aircraft cables. Tough plastic coating.

CABLE WIDTH, ORDERING INFORMATION:

$\frac{1}{4}$ -in. Cable. 3-ft. in length. 7 strands of 7 wires each.

9 HT 7745—Wt. 8 oz.\$1.99

$\frac{1}{4}$ -in. Cable. 6-ft. in length. 7 strands of 7 wires each.

9 HT 7746—Wt. 12 oz.\$2.99

$\frac{5}{16}$ -in. Cable. 6-ft. in length. 7 strands of 19 wires each.

9 HT 7747—Wt. 1 lb. 2 oz.\$3.99

$\frac{7}{16}$ -in. Cable. 6-ft. in length. 7 strands of 19 wires each.

9 HT 7748—Wt. 2 lbs. 7 oz.\$5.99

Our strongest cable...ideal for motorcycles, snowmobiles, boats.

CONSTRUCTION: Multiple-strand cable of high-carbon steel is $\frac{3}{8}$ -inch thick. 33,000-pound tensile strength is far stronger, far more resistant to cutting than conventional chains and padlocks. Protective black outer cover protects from scratching. 7-foot length allows for versatile securing.

LOCK: 7-tumbler tubular key lock is virtually unpickable. Locking component is made of high-tensile steel with black finish. With 2 tubular keys.

ORDERING INFORMATION:

Shipping weight 8 pounds.


9 HT 77401\$29.99

New at Sears... Maximum Security Cable

Our best cable is far stronger than standard chains and padlocks...ideal for motorcycles, snowmobiles, boats

\$29⁹⁹

YOU CAN DO MORE...



**Universal Tool
Post Grinder**
\$399.95

Enables 12 1/4-inch metal lathes to grind
tools, dies, bearings, shafts, valves

Mounts on tool slide of lathe compound rest for
precision work.


MOTOR: Two-speed 3450 rpm motor develops
maximum 1/4 HP. Belt-drive gives 4900 and 9100
rpm for grinding in soft or hard metals.

COMPONENTS: Includes belt, 4-inch external
and 1/2-inch internal grinding wheels (grind up to
4 1/4 inches external diameter; from 1/4 to 9 1/4
inches internal diameter). With diamond wheel
dresser and quill for internal work.

ELECTRICAL INFORMATION: 110-120-volt, 60-
Hz., AC. 150 maximum idle watts.

ORDERING INFORMATION:

9 HT 2998C—Shpg. wt. 37 lbs. \$399.95

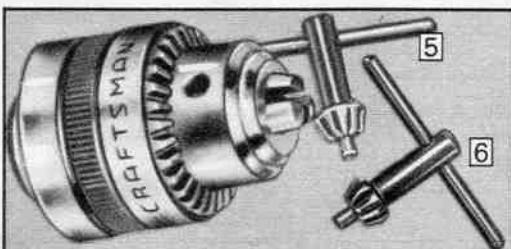

**(5) Replacement
Electric Drill Chucks**

Low
as **\$5.99**

Three-jaw keyed chuck for Sears and other electric
drills. Key included. Heavy-duty steel.

THREAD SIZES. CAPACITY. ORDERING INFO:

Catalog Number	Fit Threads	Capacity	Shipping weight	Price
9 HT 2975	1/4 or 3/8-in. x24	1/8 to 3/8 in.	15 oz.	\$5.99
9 HT 2980	1/2-in. x20	3/8 to 1/2 in.	1 lb.	7.99

(6) Chuck Keys for electric drills

Low
as **79c**

Fits geared chucks on Jacobs, Supreme or Sears elec-
tric drills listed below. Heavy-duty steel.

TYPE. ORDERING INFORMATION:

Catalog Number	Fits Jacobs Chuck	Supreme Chuck	Sears Chuck	Shpg. wt.	Each
9HT2051	1A,1BS	1A,1T1	9-2972	4 oz.	99c
9HT2073	7,7B,7-1A	H17A,4A,4B, 4C,4T1,4T2	9-2979 9-2976	7 oz.	\$1.59
9HT2058	MC1,MC2, U4G	B1A,B80A, BM1A,S80A	9-2975 9-29721	4 oz.	79c
9HT2059	MC4K61	B13A,B14T33 B14B,B16B, B16A,B16T33	9-2973 9-2980	4 oz.	99c




Lathe Handbook

CONTENTS: Hints on lathe care, opera-
tions, and attachments. 258 pages. With
machinist's tables, photos, diagrams and
index tabs. Paperbound.

ORDERING INFORMATION:

Shipping weight 1 pound 4 ounces.
9 HT 2925 \$7.49

Accessories for metal lathes, electric



Reversing Switches, Taper Attachment, Tool Rests for metal lathes

(1) Reversing Switch for motors up to 1 HP

FUNCTION: Gives you the control to stop, reverse
split-phase and capacitor motors up to 1 HP. Gives
added control for precision operations like threading.
Use on any 12 1/4-in. metal-turning lathe with proper
wiring. For up to 550-volt, AC. Installation diagram.

ORDERING INFORMATION:

Shipping weight 1 pound 9 ounces.

9 HT 2982 \$34.95

(2) Reversing Switch for motors up to 1 1/2 HP

FUNCTION: Lets you quickly stop, start and reverse
lathe for added control over threading and other jobs.
Specifically designed to fit CRAFTSMAN 6 and 12 1/4-inch
lathes. Use with AC single and 3-phase motors develop-
ing a maximum of 1 1/2 HP. For up to 550-volt, AC.
2-wire, 8-foot cord. Includes installation diagram.

ORDERING INFORMATION:

Shipping weight 4 pounds 1 ounce.

9 HT 2018 \$74.95

(3) CRAFTSMAN® Taper Attachment

FUNCTION: Cuts duplicate tapers on pieces of differ-
ent lengths. For internal boring, external work. Index
plate graduated 7°, 3 inches both sides of center line.
Travel is 6 inches.

ORDERING INFORMATION:

For 12 1/4-inch CRAFTSMAN lathe only.

Shipping weight 10 lbs. 9 oz.

9 HT 29845 \$129.95

(4) Two-piece Toolrest Set

FUNCTION: Allows precision operations in wood, cop-
per, brass, aluminum and plastic, using handheld tools.
Rugged cast-iron construction. Mounts quickly in
compound rest of metal lathes.

SIZES. ORDERING INFORMATION:

For 12 1/4-inch metal lathes. 4 and 12-in. wide sizes.

9 HT 2045—Shpg. wt. 2 lbs. 8 oz. Set \$26.95

For 6-inch metal lathes. 4 and 8-in. wide sizes.

9 HT 2044—Shpg. wt. 1 lb. 6 oz. Set \$21.95



Accessories for metal lathes

(7) Follower Rest. Mounts to rear of carriage

dovetail slide. For work on long slender rods.

ORDERING INFORMATION:

For 6-inch metal lathes.

9 HT 2042—Shpg. wt. 3 lbs. 2 oz. \$26.95

For CRAFTSMAN 12 1/4-inch metal lathe.

9 HT 2988—Shpg. wt. 3 lbs. 4 oz. \$26.95

(8) Steady Rest.

Clamps to bed ways. Bronze jaws.

TYPE. ORDERING INFORMATION:

For 6-inch metal lathes. For diam. to 2 3/8 in.

9 HT 2041—Shpg. wt. 3 lbs. 2 oz. \$29.95

For CRAFTSMAN 12 1/4-inch metal lathes.

Hinged type. For diameters to 2 3/8 inches.

9 HT 20507—Shpg. wt. 9 lbs. 4 oz. \$69.95

(9 and 10) **Face Plates.** Use for work which
cannot be machined on the center or in the chuck.
Fit on headstock spindle. Machine gray-iron cast-
ing; slots clamp work or drive lathe dog.

(9) For 6-inch metal lathes. For 1-inch, 10
thread spindle. 5 1/4-inch diameter with 4 slots.

ORDERING INFORMATION:

9 HT 21405—Shipping weight 1 lb. 14 oz. \$16.95

(10) For 12 1/4-inch metal lathes. For 1 1/2-inch, 8
thread spindle. 8 1/2-inch diameter with 8 slots.

ORDERING INFORMATION:

9 HT 24755—Shipping weight 7 lbs. \$31.95

(11) Lathe Dogs. Forged steel. For (9) or (10).

SIZES. ORDERING INFORMATION:

9 HT 21831—1/2-in. Shpg. wt. 8 oz. \$5.19

9 HT 21832—3/4-in. Shpg. wt. 10 oz. 5.99

9 HT 21833—1-in. Shpg. wt. 12 oz. 6.99

9 HT 21834—1 1/2-in. Shpg. wt. 14 oz. 8.99

(12) Carriage Stop. Clamps to bed way of 6-inch or 12 1/4-inch metal lathes.

ORDERING INFORMATION:

9 HT 2185—Shipping weight 1 lb. 4 oz. ... \$26.95

(13) **Cross Slide Stop.** Fits 12 1/4-in. metal
lathes. Shows depth at which to stop cross feed.
Not intended to stop cross feed automatically.
To install, clamp cross slide stop to dovetail.

ORDERING INFORMATION:

9 HT 1510—Shipping weight 8 oz. \$19.95

(14) **Angle Plate.** For 12 1/4 and 10-in. metal
lathes. Simplifies off-center work and machining
of odd-shaped pieces. Bolt to face plate. Horizontal
face, 6x4 3/4x5 1/2 in. Vertical face, 6x2 3/8x5 1/2 in.

ORDERING INFORMATION:

9 HT 1509—Shipping weight 10 lbs. ... \$42.99

(15) Boring Tool Holder.

Includes clamp ring, V-block, plain block and 1/4-
inch high-speed boring tool. Slots hold boring
tools of 3/16, 1/4, 5/16, 3/8 inches diameter.

ORDERING INFORMATION:

For 6-inch metal lathes.

9 HT 1515—Shipping weight 1 lb. \$17.95

For 12 1/4-inch metal lathes. Clamp ring has
1 3/4-inch outside diameter, 1 1/16 inside diam.

9 HT 1511—Shipping weight 1 lb. \$19.95

(16) Clamp-type Dog.

For 12 1/4, 6-inch metal lathes. Handles square,
round, rectangular and hexagonal work. Clamp
bars machined, hardened—screws heat treated
for long wear. Jaws open to 2 inches.

ORDERING INFORMATION:

9 HT 1512—Shipping weight 1 lb. \$26.95

(17) Woodruff Keyway Cutters. 1/2-inch shank. For 12 1/4 and 6-inch metal lathes.

ORDERING INFORMATION: Shpg. wt. 8 oz.

Catalog No.	Diameter	Thickness	Each
9 HT 29961	1/4 inch	1/4 inch	\$12.95
9 HT 29962	3/8 inch	3/8 inch	13.95
9 HT 29963	1 inch	1/4 inch	17.95
9 HT 29964	1 1/4 inch	3/8 inch	19.95
9 HT 29965	1 1/4 inch	3/4 inch	22.95

drills and motors

Milling Accessories for Lathes

(1) **Milling Attachment.** Graduated swivel vise, flat block. For face-milling, cutting keyways, etc. Use with 6 or 12 1/4-in. lathes.

For CRAFTSMAN 6-in. Lathes. Vise capacity 2-in. Vertical feed 1 3/4-in. Cross feed 3 3/8-in.

ORDERING INFORMATION:

9 HT 2057—Shipping weight 8 lbs. 6 oz. . . . \$99.95

For CRAFTSMAN 12 1/4-in. Lathes. Vise capacity 2 3/4-inches. Vertical feed 3 3/4-inches. Cross feed 5-inches.

ORDERING INFORMATION:

9 HT 2987C—Shipping weight 17 lbs. . . . \$129.95

(2) **Milling Cutter Holder.** With 1/2-in. arbor. ORDERING INFORMATION:

For 6-in. lathes 9-2120, 9-2140 only.

9 HT 21408—Shipping weight 1 lb. 5 oz. . . . \$28.95

For 12 1/4-in. lathes.

9 HT 29945—Shipping weight 2 lbs. 2 oz. . . . \$36.95

Set of Bushings (not shown). Adapts either holder above to these end mill sizes: 1/4, 3/16, 1/8, 5/16 inch.

ORDERING INFORMATION:

9 HT 2985—Shpg. wt. 8 oz. . . . Set \$11.95

(3) **Arbors.** Enable cutter holders (2) to take angular cutters (4).

ORDERING INFORMATION:

For 3/8-in. x 24-thread cutter.

9 HT 1566—Shpg. wt. 3 oz. . . . \$9.95

For 1/2-in. x 20-thread cutter.

9 HT 1567—Shpg. wt. 3 oz. . . . \$9.95

(4) **Angular Cutters.** Face mill, dovetail, cut angles less than 90°. Included angle of 60°.

SIZES, ORDERING INFORMATION:

3/16-inch thick, 1 1/4-inch diameter with 3/8 inch x 24 thread hole. Use with arbor 9 HT 1566 to fit holders (2).

9 HT 29951—Shipping weight 8 oz. . . . \$35.95

1/8 inch thick, 1 3/8 inch diameter with 1/2 inch by 20 thread hole. Use with arbor 9 HT 1567 to fit holders (2).

9 HT 29952—Shipping weight 8 oz. . . . \$38.95

(5) **Right hand Spiral End Mills**

For slots. Held in milling holder 9 HT 29945 or 9 HT 21408, with bushing 9 HT 2985.

SIZES, ORDERING INFORMATION: Wt. 8 oz.

Catalog Number	Diameter	Length flute	Each
9 HT 29971	1/4 in.	3/4 in.	\$9.95
9 HT 29972	3/8 in.	1 1/4 in.	11.45
9 HT 29973	1/2 in.	1 3/4 in.	12.95
9 HT 29974	3/4 in.	2 in.	13.95
9 HT 29975	1 in.	2 1/4 in.	14.95

Sears Has a Credit Plan to Suit Most Every Need
See Big Book or ask for details

CRAFTSMAN® Lathe Chucks

(6) **Independent 4-jaw Chucks.** Chuck body semi-steel cast with deep jaw slots for strength and bearing surface. All four reversible jaws work independently, so they're ideal for holding irregularly shaped pieces. Large jaw screw and T-handle wrench. Made in England.

SIZES AND ORDERING INFORMATION:

Cat. No.	Will fit spindle	Diam.	Shpg. wt.	Each
9HT2155	3/4-in. by 16-thread	4 in.	4 lbs.	\$64.95
9HT2159	1-in. by 10-thread	4 in.	3 lbs. 14 oz.	64.95
9HT2150	1 1/2-in. by 8-thread	6 in.	10 lbs.	109.95
9HT2158	1 1/2-in. by 8-thread	8 in.	14 lbs.	119.95

(7) **Universal 3-jaw Lathe Chucks.** Heavy-duty self-centering type. Jaws controlled by single screw and pinion gear. . . . ideal for centering work. Body casting of semi-steel. Alloy metal scroll, alloy steel pinion. Alloy steel jaws with raised steps heat-treated and hardened. Inside, outside gripping jaws. T-handle chuck wrench. Made in England.

SIZES AND ORDERING INFORMATION:

Cat. No.	Will fit spindle	Diam.	Shpg. wt.	Each
9HT21407	1-in. by 10-thread	4 in.	5 lbs. 8 oz.	\$119.95
9HT2165	1 1/2-in. by 8-thread	5 in.	9 lbs.	139.95
9HT2168	1 1/2-in. by 8-thread	6 in.	12 lbs. 2 oz.	164.95

(8 thru 13) **Lathe Tool Holders.** Forged steel, without bit.

SIZES AND ORDERING INFORMATION:

Type	Catalog No.	Bit size	Fits Metal Lathe	Wt.	Each
(8) Straight	9 HT 2033	3/16-in.	Craftsman 6-in. lathe	8 oz.	\$9.95
(8) Straight	9 HT 2196	1/4-in.	Craftsman 12 1/4-in. lathe	10 oz.	11.95
(9) Left hand	9 HT 2035	3/16-in.	Craftsman 6-in. lathe	8 oz.	9.95
(9) Left hand	9 HT 2194	1/4-in.	Craftsman 12 1/4-in. lathe	10 oz.	7.95
(10) Right hand	9 HT 2034	3/16-in.	Craftsman 6-in. lathe	8 oz.	8.95
(10) Right hand	9 HT 2192	1/4-in.	Craftsman 12 1/4-in. lathe	10 oz.	7.95
(11) Knurling	9 HT 2036	3/16-in.	Craftsman 6-in. lathe	10 oz.	24.95
(11) Knurling	9 HT 2202	1/4-in.	Craftsman 12 1/4-in. lathe	13 oz.	20.95
(12) Threading	9 HT 2031	3/16-in.	Craftsman 6-in. lathe	10 oz.	15.95
(12) Threading	9 HT 2198	1/4-in.	Craftsman 12 1/4-in. lathe	12 oz.	15.95
(13) Cutoff	9 HT 2037	3/16-in.	Craftsman 6-in. lathe	10 oz.	16.95
(13) Cutoff	9 HT 2200	1/4-in.	Craftsman 12 1/4-in. lathe	12 oz.	14.95

Replacement Blades (not shown). For (13) above.

ORDERING INFORMATION:

9 HT 2009—For (9 HT 2037). Shipping weight 2 ounces . . . \$4.95

9 HT 2238—For (9 HT 2200). Shipping weight 4 ounces . . . 4.95

(14) **Tool Post Sets.** 4 boring bars; internal, external threading; external turning tool; spacer, V-block.

ORDERING INFORMATION:

For 6-inch metal lathe

9 HT 2038—Shipping weight 1 pound . . . Set \$37.95

For 12 1/4-inch metal lathe

9 HT 2189—Shipping weight 2 pounds 2 ounces . . . Set 42.95

(15) **Boring Tool Set.** For 6-inch metal lathes. Includes 1/4, 3/16-inch boring, and 1/4-inch threading tools, also includes V-block.

ORDERING INFORMATION:

9 HT 2008—Shipping weight 4 ounces . . . Set \$17.95

(16) **6-piece Formed Tool Bit Sets.** Threading bit; left-hand and right-hand facing bits; left-hand, right-hand round-nose turning bits. Made of high-speed steel.

SIZES, ORDERING INFORMATION:

1/4-inch size for 3-in. and 12 1/4-inch lathes

9 HT 2016—Shipping weight 4 oz. . . . Set \$9.95

3/16-inch size for 6 inch lathes

9 HT 2017—Shipping weight 3 oz. . . . Set 8.95

Work Centers, Adapter Sleeves for Lathes

(17) **Spur Centers.** Use for wood turning.

TAPER SIZE, ORDERING INFORMATION:

9 HT 21062—No. 1 Morse taper. Wt. 6 oz. . . . \$2.99

9 HT 21072—No. 2 Morse taper. Wt. 9 oz. . . . 3.99

(18) **Screw Centers.** Use for woodworking.

TAPER SIZE, ORDERING INFORMATION:

9 HT 21164—No. 1 Morse taper. Wt. 8 oz. . . . \$3.99

9 HT 21152—No. 2 Morse taper. Wt. 12 oz. . . . 4.49

(19) **60-degree Centers.** For metal turning.

TAPER SIZE, ORDERING INFORMATION:

9 HT 21102—No. 1 Morse taper. Wt. 5 oz. . . . \$2.69

9 HT 21112—No. 2 Morse taper. Wt. 6 oz. . . . 3.29

(20) **Tailstock Cup Centers.** For wood.

TAPER SIZE, ORDERING INFORMATION:

9 HT 21002—No. 1 Morse taper. Wt. 5 oz. . . . \$2.99

9 HT 21012—No. 2 Morse taper. Wt. 6 oz. . . . 2.99

(21) **Crotch Center.** For cross drilling round work. V-slot. Steel. No. 2 Morse taper.

ORDERING INFORMATION:

9 HT 21142—Shpg. wt. 1 lb. 2 oz. . . . \$4.49

(22) **High-speed Center Drill.**

SIZES, ORDERING INFORMATION: Wt. 2 oz.

9 HT 20801—3/64 in. size; 1/4 in. body . . . \$2.99

9 HT 20802—1/8 in. size; 3/16 in. body . . . 1.99

(23) **Ball-bearing 60 Center.** For hardwood and metal at high speeds.

TAPER SIZE, ORDERING INFORMATION:

9 HT 21122—No. 1 Morse taper. Wt. 11 oz. . . . \$6.79

9 HT 21132—No. 2 Morse taper. Wt. 13 oz. . . . 6.99

(24) **Adapter.** No. 2 to No. 1 Morse taper.

ORDERING INFORMATION:

9 HT 21612—Shpg. wt. 7 oz. . . . \$4.00

Work Arbors and Chucks for lathes, electric motors

(25) **Work Arbors with Chuck.** 3 jaw screw-on type. 1/2-in. cap.; 1/2-in. x 20-thread.

TAPER SIZE, ORDER INFO:

No. 1 Morse taper.

9 HT 22344—Wt. 1 lb. 8 oz. \$5.79

No. 2 Morse taper.

9 HT 22472—Wt. 1 lb. 10 oz. 5.79

(26) **Work Arbor.** Use with motor for buffing, polishing, wire brushing. Carbon steel arbor, steel flanges. 3/8-inches long, 2 3/8-inch spindle, 1/2-inch x 20-inch thread.

SIZE, ORDER INFO: Wt. 14 oz.

9 HT 21643—1/2-in. bore . . . \$2.49

9 HT 21644—3/8-in. bore . . . 2.49

(27) **Work Arbors.** 2 steel flanges, clamping nut, 1/2-in. x 20 thread.

TAPER, ORDER INFO:

No. 1 Morse taper.

9 HT 21534—Wt. 11 oz. \$3.49

No. 2 Morse taper.

9 HT 21522—Wt. 13 oz. 3.49

(28) **CRAFTSMAN Keyless Chuck.** 3-jaw, screw-on, knurled. For 1/2-in. x 20 thread spindle.

CAPACITY, ORDER INFO:

1/4-in. capacity.


9 HT 22482—Wt. 7 oz. . \$1.99

1/2-in. capacity.

9 HT 22582—Wt. 13 oz. 2.99

CRAFTSMAN® 18-inch Band Saw

Four blade speeds let you cut metal up to 2 inches thick, wood stock up to 12 inches thick, yet maintain the versatility for cutting curves, bevels, miters, straight cuts... even resawing

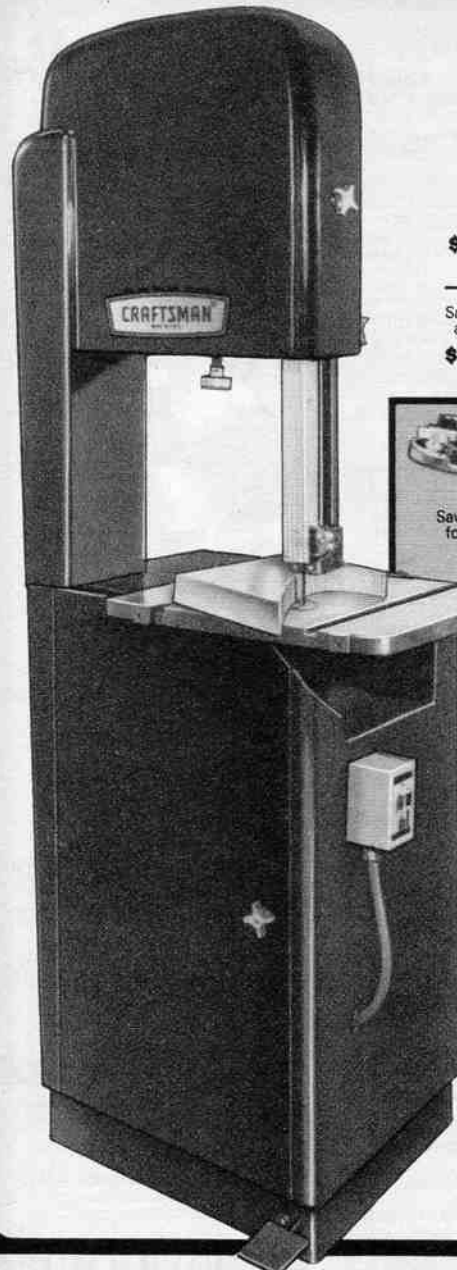

Saw alone

\$1150⁰⁰

Saw with built-in motor and magnetic switch

\$1375⁰⁰



Saw includes miter gauge for accurate miters and straight cuts in wood or metal

Magnetic switch not included with saw alone

For more information on CRAFTSMAN® Bench Tools and Accessories send for our FREE BOOKLET... 39 HT 7499

USES: Heavy-duty sawing of metals, wood stock; cuts plywood; cuts curves, bevels, miters. Make compound cuts, rip cuts, even resaw boards. Saw big sections of aluminum, brass or iron castings, galvanized steel pipe... even saw mild steel girders.

DRIVE MECHANISM: 18-inch drive and idler wheels revolve on pre-lubricated ball bearings. Ball-bearing gear reduction allows four blade speeds; 118, 167, 221 and 3550 ft. per minute. Includes 7-in., 4-step machine pulley and 3-in., 4-step motor pulley. Foot operated brake pedal stops blade when pedal is pushed down, after power is off.

WORK TABLE: Cast-iron, measures 20x17 inches. Tilts and locks at any angle up to 45° for bevel cuts. Table has two slots for miter gauge (included).

CUT CAPACITY, OVERALL SIZE: Cuts to center of wood stock up to 36 in. wide and 12 in. thick. Depth of throat with shroud, 17 in.; without shroud, 18 in. Cuts metals up to 2 inches thick. Overall: 75 in. high, 22½ in. wide, 31 inches deep.

ACCESSORIES: Includes two 11-ft. blades; ¼ in. wide for cutting metals; ⅝ in. wide for cutting wood... order extra blades below, 2 pulleys, V-belt and miter gauge.

CAPACITOR-START 1-HP MOTOR: 1725 rpm. Permanently lubricated ball bearings. Induction run, fan cooled. Pre-wired to magnetic switch... if power fails or voltage drops, switch automatically shuts motor off—won't start until you reset switch.

HOUSING, CONSTRUCTION: All operating parts enclosed (except cutting portion of blade) in steel cabinet. Blade guard assembly moves up and down, locks in any position. Adjustable belt-blade tension control. Two rubber tires, ball bearing wheels.

ELECTRICAL INFORMATION: 115/230-v., 60-Hz., AC. 1200 full-load input watts. Switch operates on 230 volts only.

ORDER INFO: See warranty on facing page, also motor warranty, page 26.

T9 HT 2361N—Shipping weight 515 pounds \$1375.00

Saw alone. Same as above but without motor and magnetic switch.

T9 HT 2360N—Shipping weight 415 pounds \$1150.00

Motor alone. Capacitor start, 1-HP, 1725-rpm. Induction run, ball bearings.

ORDER INFO: Motor warranty, page 26.

9 HT 1240C—Shpg. wt. 32 lbs. \$89.99

Rip Fence (not shown). For CRAFTSMAN Band Saw sold above.

ORDERING INFO: See Shpg. Note below.

T9 HT 23586—Shpg. wt. 13 lbs. \$32.99

Shipping Note: "T" items (as T9 HT 23586) shipped from Chicago, Philadelphia, Atlanta, Dallas or L.A. Customers served by other Distribution Centers should allow time. Pay shipping and handling charges from your Distr. Ctr. "T" items with "N" suffix (as T9 HT 2361N) are sent by motor carrier; C.O.D.'s accepted only for shipment to a Sears Store.

Extra 11-foot Blades for Band Saw above.

SIZES, USES, ORDERING INFORMATION:

Catalog Number	Width	Teeth	Cutting depth	Shpg. wt. ea.	Each	5 for
For metal						
9 HT 27525	¼-inch	18 per inch	0 to ½ in.	6 oz.	\$6.99	\$29.95
9 HT 27526	⅜-inch	14 per inch	¼ to ½ in.	8 oz.	6.99	29.95
9 HT 27527	½-inch	10 per inch	½ to 2 in.	10 oz.	6.99	29.95
For wood						
9 HT 27151	¼-inch	6 per inch	Use on woods to size limit of band saw	3 oz.	5.99	\$25.95
9 HT 27152	⅜-inch	6 per inch		4 oz.	5.99	25.95
9 HT 27153	½-inch	6 per inch		6 oz.	5.99	25.95

Sears Has a Credit Plan to Suit Most Every Need
See Big Book or ask for details

De Walt Industrial 12-inch Radial Saw

A big-capacity saw designed to withstand continuous use... ideal for factories, schools, commercial workshops where 3-phase electrical power is available.

12-inch blade cuts wood up to 4 inches thick.

Motor is totally enclosed, with magnetic starter and automatic motor brake

Saw with built-in motor and steel stand **\$845⁰⁰**



Steel stand included with saw

CUTTING BLADE, CAPACITIES: 12-inch blade. Lower blade guard. Rear-located depth of cut and miter controls. Blade and motor swivel for up to 27-inch wide out-ripping. Crosscuts up to 16-in. wide in 1-inch stock. Maximum depth of cut is 4-in. at 90°, 27½ in. at 45°. Fixed miter stops at vertical, 45°, and horizontal. Anti-kickback pawls help prevent wood from kicking back. Automatic blade brake.

ARM CONSTRUCTION: Motor and blade carriage ride on 4 permanently lubricated ball bearings in 2 machined tracks. Cast-iron arm and column support. Heavier "Deep-Beam" arm is super-rigid. Column is cadmium plated.

WORKTABLE: Chipboard, 29½x38½x1-in. thick.

STAND: Steel. Top is 26x32 inches. Positions saw worktable 33 inches from floor. Gray wrinkle finish.

MOTOR: 3450 rpm, continuous duty 2-HP, develops 5-HP. Totally enclosed, fan cooled. Thermal overload protector... low and no voltage protector meets OSHA (Occupational Safety and Health Act) requirements. ⅝-inch blade arbor accepts sanding discs, dadoes, molding heads, etc. See index for these and other accessories.

ELECTRICAL INFORMATION: Use only where 3-phase electrical power is available. Push button magnetic-type power switch with key lock (key included). Factory wired for 208-240 volt... can be re-wired for 208-240/480 volt, 60-Hertz, AC. With 8-foot, 3-wire cord.

ORDERING INFO: Warranted by De Walt. Write for free copy, see page 82. See shipping note above.

T9 HT 2319N—Shpg. wt. 265 lbs. \$845.00

Safety Note: Be sure to wear safety goggles when using saws on these two pages... see our selection of safety equipment on page 75.

CRAFTSMAN® Convertible Metal-cutting Band Saws



1

(1) Dry-cut 4 1/2-inch Saw \$449⁹⁵

with stand and motor
Three blade speeds, adjustable feed rate for cutting various metal stock. Cuts up to 4 1/2-inch round or 4x6-inch rectangular stock

MOTOR: Split-phase, rated 1/2 HP, 1725-rpm motor. No or low voltage manual reset protector helps prevent accidental starts.

HOUSING, TABLE, STAND: Precision-ground cast-iron head. Heavy-gauge steel base with replaceable wear plate. Saw swings to vertical position for contour cuts, notching and slitting . . . 3x4-in. table. Sturdy steel base with two 8-in. diam. semi-pneumatic tires. Vise adjusts for miter cuts from 45° to 90°. 44x22x38 in. high in horizontal position, 55 in. high in vertical position.

DRIVE, BLADE, CUTTING CAPACITY: V-belt drive system. Transmission has steel worm and bronze gear with permanently lubricated ball bearings, sealed gear box. 3 speeds: 65, 120, 220 fpm. Uses 1/2-inch blade. Ball-bearing blade guides provide adjustment in 3 axes for optimum accuracy and ease of adjustment. Cuts 4 1/2-inch round or 4x6-inch rectangular stock. Spring-tension, feed-rate adjustment. Automatic shut-off when cut is completed (in horizontal position). Blade guard covers exposed portions of blade above and below cutting area.

ACCESSORIES: V-belt, pulleys, 64 1/2x1 1/2-inch blade with 14 teeth per inch.


ELEC. INFO: 115 volts, 60 Hz., AC. 480 full-load input watts. 4-foot, 3-wire cord.

ORDERING INFO: See tool warranty below, motor warranty on page 26.

9 HT 22965N—Shipping weight 142 pounds \$449.95

FULL ONE YEAR WARRANTY ON CRAFTSMAN® STATIONARY POWER TOOLS

If, within one year from date of purchase, your CRAFTSMAN Band Saw fails due to a defect in material or workmanship, we will repair it free of charge. Warranty service is available by contacting any Sears store throughout the United States. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

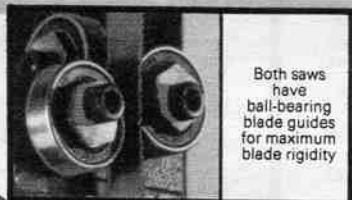

Both saws have ball-bearing blade guides for maximum blade rigidity



Both saws have permanently lubricated sealed gear boxes for positive drive, long life . . . no open gears to clog with dirt and metal chips



Both saws give precision 45° and 90° cuts in horizontal position . . . swing to vertical for contour cuts, notching, slitting



2

(2) Wet or Dry-cut 7-inch Saw \$950⁰⁰

with stand and motor
Four blade speeds and hydraulic feed provide fast controlled cuts of the hardest metals. Cuts up to 7-inch round or 7x12-inch rectangular stock

MOTOR: Split phase, rated 1/2 HP, 1725-rpm motor. Manual reset overload protector.

HOUSING, TABLE, STAND: Heavy-duty steel construction. Saw swings to vertical position for contour cuts, notching, slitting . . . 3x4 inch table. Steel stand. Wet cut system for horizontal cuts . . . coolant is pumped from reservoir over blade and recirculated and filtered automatically for extended blade life. Quick action vise adjusts for miter cuts of 45° and 90°. Overall, 53x24x67 in. high in vertical position, 44 1/2 in. high in horizontal position.

DRIVE, BLADE, CUTTING CAPACITY: V-belt drive system. Completely sealed spur gear transmission. 4 cutting speeds; 65, 105, 180, 280 feet per minute. Uses 3/8 or 1/2-inch blade. 3 ball bearing blade guides provide adjustment on 3 axes to keep blade from flexing even on angle cuts. Cuts up to 7-inch round stock or 7x12 inch rectangular stock. Adjustable hydraulic feed and quick change tension adjustment allows operator infinite range of cutting pressures and feed rates. Stops automatically when cut is completed in horizontal position only.

ACCESSORIES: V-belt, blade (14 teeth per inch).

ELECTRICAL INFO: 115-230 v., 60 Hz. AC. 660 full load w. 4-ft. 3-wire cord.


ORDERING INFORMATION: See tool warranty at left, motor warranty page 26.

Shipping note below. Stand unassembled.

F9 HT 22963N—Shipping weight 441 pounds \$950.00

Dry-cut only 7-inch Saw. Same as above but without wetting system.

F9 HT 22962N—Shipping weight 404 pounds \$850.00



Extra Blades for CRAFTSMAN® Metal-cutting Band Saws

Extra blades for (1) (9 HT 22965N) sold above, left, 14 teeth per inch. 64 1/2x1 1/2-inches.

ORDER INFO: Wt. each 6 oz.
9 HT 22332 Ea. \$3.99, 5 for \$17.95

Extra blades for (2) (F9 HT 22963N), (F9 HT 22962N) above, right, 14 teeth per in., 107x5/8 in.

ORDER INFO: Wt. each 14 oz.
9 HT 22333 Ea. \$5.99, 5 for \$27.45

(3 thru 5). Extra Blades. For 9 HT 2296N and 9 HT 22964N2 sold at right and former 9-2295, 9-22954, 9-2290, 9-22901.

TEETH, USE, ORDERING INFORMATION:

Teeth per in.	Use for cuts (in. deep)	Catalog Number	Shpg. wt. ea.	Price each	5 FOR
(3) 24	up to 1/4 in.	9 HT 22929	6 oz.	\$4.99	\$22.45
(4) 14	1/4 to 1 in.	9 HT 22927	6 oz.	4.99	22.45
(5) 10	Over 1 in.	9 HT 22926	6 oz.	4.99	22.45

CRAFTSMAN® Dry-cut 4-inch Metal-cutting Band Saw with 3 blade speeds and gravity feed . . . cuts 4-inch round stock or 4x6-inch rectangular stock

MOTOR: Split phase, rated 1/3-HP, 1725-rpm sleeve-bearing. Manual reset overload protector.

HOUSING, TABLE, STAND: Die-cast aluminum housing. Swings to vertical position. 8x12 1/2-in. table locks. Steel stand, two 6-in. rubber wheels. Quick action vise adjusts to 45° or 90° angle . . . stock stop.

DRIVE, BLADE, CUTTING CAPACITY: Worm-gear, belt drive system. Solid-type blade guides. Gravity feed with spring tension. Cuts stock up to 4-in. round stock or 4x6 in. rectangular stock. 3 speeds; 90, 155, 250 fpm. 1/2-in. blade. Stops automatically when cut completed in horizontal position only.

ACCESSORIES: Cutting table, blade (14 teeth/in.).

ELECTRICAL INFORMATION: 115 volts, 60 Hz. AC. 490 full load watts, 4-ft., 3-wire cord.

ORDERING INFORMATION: Stand unassembled. See warranty above. See motor warranty page 26.

9 HT 22964N2—Shpg. wt. 91 lbs. \$285.00

Saw, Stand. Use 1725-rpm (min. 1/3-HP) motor.

9 HT 2296N—Shpg. wt. 75 lbs. \$249.95

Motor alone. Same as above with 9 HT 22964N2.

9 HT 1233C—Shpg. wt. 16 lbs. \$45.99

SHIPPING NOTE: "F" items (as F9 HT 22963N) sent from factory in Paris, Tenn. Pay motor carrier charges from factory. Allow extra delivery time. No C.O.D.'s.

\$285⁰⁰ Saw, Stand and Motor | \$249⁹⁵ Saw, Stand



CRAFTSMAN® AC/DC Arc Welder Outfits

DC reverse polarity for cleaner overhead and vertical welding

\$289⁰⁰

25-230 amps AC or 25-180 amps DC ranges

Choose from three kinds of welding current: AC for regular welding; DC reverse polarity for vertical and overhead welding jobs; DC straight polarity for all-position welding. Use any AC, DC, even low hydrogen, stainless steel or hard surfacing electrodes.

TRANSFORMER: Aluminum-wound. Permanently lubricated cooling fan helps increase duty cycle (ratio of welding time to cooling time per 10-minute cycle).

HEAT SELECTIONS: Set controls on top of cabinet for desired heat . . . infinite heat selection on AC from 25-230 amps; DC from 25-180 amps.

CABINET: Heavy steel cabinet, baked enamel finish. Cabinet is 11 1/2 x 13 1/2 x 21 inches high.

ACCESSORIES: Includes full-face welding helmet, power cable with plug, ground cable with grounding clamp, electrode cable with electrode holder, instruction manual.

ELECTRICAL INFO: 230-volt, 60-Hz., AC. ORDER INFO: See warranty below, other specs. on p. 37. Order receptacle (5) below.

9 HT 20177N—Shpg. wt. 123 lbs. \$289.00

250-amp AC/DC Arc Welder. As above, with extended ranges . . . AC, 30-250 amps; DC, 30-250 amps. No cord, must be wired direct. 9 HT 20178N—Shpg. wt. 138 lbs. \$339.00



Light-duty, constant-ampere AC Arc Welders with carbon arc torch

70-ampere **\$75⁰⁰** | 50-ampere **\$59⁵⁰**

70-ampere Arc Welder. For repair jobs in home and shop. Weld metals up to 1/2 inch thick with multiple passes, cut lighter metals.

TRANSFORMER: Aluminum-wound, convection-cooled.

HEAT SELECTION: Constant 70-ampere, not adjustable.

CABINET: Steel. Measures 10 3/4 x 10 1/4 x 7 1/4 inches high.

ACCESSORIES: Includes electrode holder, 9000° carbon arc torch, carbons, electrodes, brazing rod, cables, full-face welding helmet and instruction manual.

ELECTRICAL INFO: 1725-watts. 110-120-volt, AC. UL listed. ORDER INFO: Not Craftsman. See warranty below.

9 HT 20179C—70-ampere Welder. Wt. 33 lbs. . . . Outfit \$75.00

50-ampere Arc Welder. As above, but welds up to 1/4-in. thick with multiple passes, constant 50-ampere, 115-v. 9 HT 20175C—Shipping weight 31 pounds. . . . Outfit \$59.50

Electrodes and rods for use with welders above.

TYPES, SIZES, ORDERING INFORMATION:

Type	Size in.	Catalog Number	Pkg. of	Wt. lbs.	Pkg. price
Welding Electrodes . . . 1/16		9 HT 20264	54*	12	\$2.39
Contact Electrodes . . . 3/64		9 HT 20265	21*	12	2.89
Brazing Rods 3/32		9 HT 20266	34*	4	6.89

FULL ONE YEAR WARRANTY ON CRAFTSMAN ELECTRIC WELDER (90 DAYS ON NON-CRAFTSMAN). If any Craftsman electric welder fails to perform properly, due to a defect in material or workmanship within 1 year (90 days for non-Craftsman welders) from date of purchase, Sears will repair it, free of charge. Warranty service is available by simply returning the welder to the nearest Sears store or Service Center throughout the United States. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.



Accessories for AC and DC Arc Welders

(1) Twin Carbon Torch

For any arc welder (exc. 9-20175, 9-20179). 2 cored carbons, 5-ft. cables. Insulated fiber grip handle. Braze, solder, heat.

ORDER INFO: Wt. 4 lbs. 2 oz. 9 HT 20073 \$29.50

Cored Carbons for (1). 1/4-in. also for 9-20175, 9-20179.

Size in.	Catalog Number	Pkg. of	Wt. oz.	Pkg. price
1/4 x 6	9 HT 2020	10	7	\$3.49
3/8 x 6	9 HT 20221	10	11	3.49

(2) Chipper Brush. Forged steel head with wire brush.

ORDER INFO: Wt. 1 lb. 4 oz. 9 HT 2074 \$8.95

Extra Brush for (2).

9 HT 2081—Wt. 6 oz. \$1.29

Extension Cord. 25-ft., 3-wire. For 230 amp arc welders.

ORDER INFO: Wt. 8 lbs. 15 oz. 9 HT 20699 \$34.99

(3) Ground Clamp. Copper alloy jaws. 500-amp capacity.

ORDER INFO: Wt. 1 lb. 6 oz. 9 HT 2075 \$5.95

(4) Electrode Holder. Copper alloy jaws, 200-amp capacity. Asbestos jaw covers. Holds electrodes up to 1/4-in. diam.

ORDERING INFO: Wt. 1 lb. 9 HT 2071 \$9.95

(5) Receptacle. For 230-volt arc welders. Rated 50-amps at 250-volt, 2-pole, 3-wire ground. Surface-mounted. Includes mounting hardware.

ORDERING INFO: Wt. 1 lb. 9 HT 20898 \$3.99

(6) "Arc Weld it Yourself" Manual. Illustrated. Explains AC arc welding process.

ORDERING INFO: 36 pages. Shipping weight 2 ounces. 9 HT 20256 95c

(7) Industrial Welders' Helmet. Ratchet-type adjustment. Slide-in, lift-front plate holder. With cover lens and No. 10 filter.

ORD. INFO: Wt. 2 lbs. 10 oz. 9 HT 1325 \$12.95

(8) Homeshop Welders' Helmet. Cover glass, lens holder, No. 10 filter.

ORDER INFO: Wt. 2 lbs. 1 oz. 9 HT 1320 \$6.95

No. 10 Replacement Filter for (7 and 8) above.

9 HT 13277—Wt. 4 oz. . . . \$1.99

(9) Dolly Kits. With 2 rubber wheels, axle kit, handle.

ORDER INFO: Kit for 9 HT 20177N, 9 HT 20178N, former 9-20176. 9 HT 20483—Wt. 4 lbs. . . . \$9.95

Kit for 9-20153, 9-20133. Shipping weight 1 lb. 4 oz. 9 HT 20481 \$4.99

Electrodes for Arc Welders

Contact-type Electrodes. For sheet metal fabricating, production welding, auto and farm equipment repairs. General-purpose (type E-7014) start on contact, hold steady arc while touching metal, restrike on contact. For AC or DC welders.

SIZES, ORDER INFO: Save with 25-lb. bulk package.

Size inches	Catalog Number	Tube pkg. of	Wt. lbs.	25-lb. pkg. Catalog No.	Pkg. of	Wt. lbs.	25-lb. pkg.
3/32 x 12	9HT20286	44*	1 10	9HT20284C	325*	26	\$19.95
1/4 x 14	9HT20287	23*	1 15	9HT20285C	162*	26	19.95
3/32 x 14	9HT20288	17*	1 14				

Deep-penetrating Electrodes. For repair of autos, farm equipment, structural pipes. Conventional (type E-6011) weld in any position . . . horizontal, vertical, overhead. Penetrate rust, dirt for strong weld. For AC or DC welders.

SIZES, ORDER INFO: Save with 25-lb. bulk package.

Size inches	Catalog Number	Tube pkg. of	Wt. lbs.	25-lb. pkg. Catalog No.	Pkg. of	Wt. lbs.	25-lb. pkg.
3/32 x 12	9HT20276	60*	1 13	9HT20273C	925*	26	\$29.95
1/4 x 14	9HT20277	32*	1 15	9HT20274C	455*	26	19.95
3/32 x 14	9HT20278	24*	2	9HT20275C	287*	26	19.95

*Quantities figured by weight, may vary due to density of electrode flux.

Sheet-metal Electrodes.

Tipped for quick starts. Measure 1/16 x 9 in. For home repair, metal sculpturing.

ORDER INFO: 64 in pkg.* Wt. 1 lb. 2 oz. 9 HT 20293 Pkg. \$3.99

Machineable Cast-iron Electrodes.

Nickel core wire. No pre-heating needed. 1/8 x 13 1/2 in. long. Weld cast-iron to steel, nickel alloys and copper.

ORDER INFO: Pkg. of 6. Shipping wt. 8 oz. 9 HT 20271 Pkg. \$4.99

Cutting Electrodes.

3/32 x 12 in. For piercing, gouging, cutting, scarfing of any alloy. Removes old welds. Bevels cracks.

ORDER INFO: 27 in pkg.* Wt. 1 lb. 2 oz. 9 HT 20281 . Pkg. \$3.49

Hard-surfacing Electrodes.

Tough alloy resists abrasion. 1/8 x 14 in. For strong welds on equipment subject to wear.

ORD. INFO: 23 in pkg.* Wt. 1 lb. 15 oz. 9 HT 20045 . Pkg. \$3.99

Electrode Assortment.

With 6 types, 4 sizes: contact, deep penetrating, cast-iron, hard-surfacing, cutting, sheet-metal. 1/16, 3/32, 1/8, 5/32-inch sizes.

Gives you a full range of welding operations described above.

ORDERING INFO: 180 in pkg.* Wt. 10 lbs. 12 oz. 9 HT 20471 Pkg. \$29.95

This CRAFTSMAN® Outfit converts your Arc Welder to the versatile T.I.G. (Tungsten Inert Gas) process

\$199⁰⁰ outfit

This outfit will enable you to weld metals such as aluminum, bronze, nickel, stainless steel . . . also metals of very light gauge and up to 1/4 in. thick. Use both Arc Stabilizer and T.I.G. Torch to connect AC or AC-DC arc welders.

HOW IT WORKS: Arc stabilizer operates continuously to maintain arc. Provides low arc for AC units—tip need not touch metal during welding. Process floods molten steel with non-combining inert gas (usually argon, not incl.)—prevents oxidation, embrittlement of weld. No preheating. T.I.G. Torch (not sold separately) uses 1/8-in. tungsten electrode—won't pass impurities on to weld. With shut-off valve, regulator, hose, 3 collets (1/16, 3/32, 1/8-inch).

CABINET: Air-cooled. Rated for 30% duty cycle. Measures 13 1/4 x 8 1/2 x 9 1/8 inches wide.

ELECTRICAL INFORMATION: Stabilizer uses 230-volt outlet, or wire into welder.

ORDERING INFORMATION: See warranty above. 9 HT 20118C2—Shipping weight 22 pounds . . . Outfit \$199.00

Arc Stabilizer alone. Without torch. For easier starts with AC or AC-DC welders in stick electrode process. 13 1/4 x 8 1/2 x 9 1/8 in. wide. Uses 230-v. outlet or wire into welder circuit.

ORDERING INFORMATION: See warranty above. 9 HT 20993C—Shipping weight 17 pounds \$115.00

Electrode Cup.

SIZES, ORD. INFO: Wt. 3 oz. For 1/16, 3/32-in.

9 HT 20163 \$3.19

For 1/8-inch. 9 HT 20168 3.99



Tungsten-tip Electrodes.

ORDERING INFO: Shipping weight 3 oz.

9 HT 20161—1/16-in. . . . \$1.59

9 HT 20164—3/32-in. . . . 3.79

9 HT 20166—1/8-in. . . . 5.29

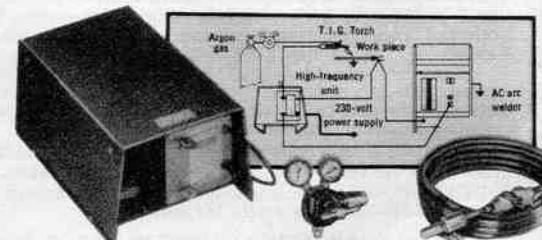

These 2 CRAFTSMAN® Arc Welders are easy as ABC to operate

- (A) Material thickness gauge lets you verify thickness of metal to be welded and indicates recommended rod size
- (B) Electrode size index holes let you verify correct electrode size
- (C) Top-mounted, one-hand control... set indicator at recommended electrode size and you automatically have correct heat setting

230-amp AC Dual-range Arc Welder

30-140 amp range for improved arc stability... 45-230 amp range best for minimum current draw

\$179⁰⁰

HEAT SELECTIONS: Exclusive top-mounted control lets you change and lock in heat settings with just one hand. Infinite heat selections from 30-230 amperes in 2 ranges.

CABINET: Steel, baked enamel finish... 15x12x21 in. high. Flow-thru, side-to-side ventilation allows unit to be placed against wall without worry of overheating because of poor air circulation.

ACCESSORIES: 12-ft. electrode, 10-ft. ground cables, electrode holder, ground clamp, full-face welder helmet, input cord with 230-v. plug, operating instr., Arc Weld-it-Yourself Manual.

ELEC. INFO: 230-volts, 60-Hz., AC. UL listed, CSA listed, NEMA rated. Requires 50-amp circuit, wiring. Order receptacle (9 HT 20698) keyed (5) on p. 36.

ORDER INFO: See warranty on page 36, other electrical specifications below. 9 HT 20137N—Wt. 95 lbs. ... \$179.00

Weld, pierce or cut metal... use to repair auto body or farm and construction equipment. Use carbon arc torch (9 HT 20073 keyed (1) and sold separately on opposite page) with welder to braze, repair light gauge metal, sweat copper tubing... even construct metal sculptures.

TRANSFORMER: Advanced aluminum-wound transformer design lets you weld with all electrodes up to 3/16 in. diameter... even low hydrogen and stainless steel electrodes. Dual range transformer gives improved arc stability at the 30 to 140 ampere range (easier to strike and hold arc) or use 45 to 230 ampere range when minimum current draw is desired. Permanently lubricated cooling fan increases duty cycle (ratio of welding time to cooling time per 10 minute cycle). Extended duty cycle means fewer pauses for cooling so you can weld for longer periods of time.

IMPORTANT ELECTRICAL SPECIFICATIONS: Before ordering, first check voltage, cycle phase and capacity of your power line with your electric utility company or local REA office.

Catalog Number	Amperes maximum input	Input amperes rated	Primary maximum short circuit	Fuses amps.	Rod sizes (inches)	Max. KVA	Max. KW	Maximum open circuit secondary	Duty cycle	Max. Power factor
9HT20139	73	60	60 amps	60	1/16-1/4	16.8	11.7	80-volts	†	70.0
9HT20137	55	50	50 amps	50	1/16-3/16	12.6	7.6	80-volts	†	66.0
9HT20177	81	65.7	92 amps	60	1/16-3/16	18.6	8.0	78-volts	†	47.6
9HT20178	*98	80	155 amps	60	1/16-1/4	22.7	11.2	78-volts	†	49.3
	**92	76	130 amps	60	1/16-1/4	20.7	11.2	78-volts	†	54.1
9HT20175	18	15	28 amps	15	1/16-3/32	2.1	1.5	45-volts	20%	70.0
F9HT20179	25	20	32 amps	20	1/16-1/8	2.8	1.75	41-volts	20%	62.5

*Wired for 208-volts

**Wired for 230-volts

†From 20% to 100% depending on amp setting

295-amp AC Dual-range Arc Welder

30-200 amp, 40-295 amp ranges... weld any gauge metal from heavy plate to light gauge steel

\$199⁰⁰

Welds any gauge metal from heavy plate to light gauge steel.

TRANSFORMER: Advanced aluminum-wound transformer design lets you weld with all electrodes up to 1/4 in. diameter... even low hydrogen and stainless steel electrodes. Two ranges of transformer: (40-295 amps; 30-200 amps) for flexibility, minimum line draw and increased arc stability. Permanently lubricated cooling fan and insulation increase duty cycle (ratio of welding time to cooling time per 10 minute cycle). Extended duty cycle means fewer pauses for cooling so you can weld for longer periods.

HEAT SELECTIONS: Exclusive top-mounted control lets you change and lock in heat setting with just one hand. Infinite selections from 30 to 295 amperes in 2 ranges.

CABINET: Steel with baked enamel finish... 15x12x21 in. high. Flow-thru, side-to-side ventilation allows unit to be placed against wall without worry of overheating because of poor air circulation.

ACCESSORIES: Includes 10-foot electrode and 10 foot ground cables, heavy-duty electrode holder and professional-type ground clamp. Full-face welder helmet, operating instructions with Arc Weld-it-Yourself Manual.

ELECTRICAL INFORMATION: 230-volts, 60-Hertz, AC. UL listed. NEMA rated. Requires 60-ampere circuit and direct wiring. **ORDERING INFORMATION:** See warranty on page 36. See other important electrical specifications below, left.

Shipping weight 110 pounds. 9 HT 20139N \$199.00

(1) Wheel Kit for either Arc Welder above

Give portability to your welder. Includes two 6-inch rubber-tired wheels, top-mount handle for maneuvering and bottom front brace for stability. Assembly and installation instructions included.

ORDERING INFORMATION: Shipping weight 6 lbs. 2 oz. 9 HT 20482 Kit \$9.95

CRAFTSMAN® 55 to 180-amp AC Welder/Alternator

120-240-v. pushbutton battery start **\$1095⁰⁰** | 120-240-v. manual start **\$995⁰⁰**

Use for welding and standby power. **ENGINE:** 14-HP. Solid-state, single-cylinder, 4-stroke gasoline engine. Air-cooled, 1 1/2-gal. tank. Stellite™ exhaust valve, seat, rotor.

WELDER: AC alternator and control circuit produce steady arc. Handles up to 3/16-in. electrodes. 6 current settings: 55, 80, 105, 130, 155, 180-amps.

ALTERNATOR: 5000 watt, 240-v. and two 120-v. outlets for auxiliary AC output. 25 and 40-amp manual reset circuit breakers.

SIZE: 23x24x31 in. high, with 2-man carrying frame.

ELEC. INFO: AC welding output: 55-180-amp range, 25-v. AC auxiliary output: 120/240-v., 60-Hz. **ORDER INFO:** See warranty p. 36; shipping note below, left.

Push-button, electric-start Unit. With electric switch. Order 12-v. Garden-Recreation DieHard® Battery (not incl.) 28-96032N from Big Book. Wt. 350 lbs. F9 HT 20198N \$1095.00

Manual-start Unit. With recoil rope-pull starter. Wt. 350 lbs. F9 HT 20194N \$995.00

CRAFTSMAN® 50-200-amp DC Welder/Alternator


ENGINE: Electric-start, 16-HP, 2-cylinder, 4-stroke gasoline engine. Air-cooled, 7.3-gallon tank. Stellite™ exhaust valve, valve seat, rotor for long life.

WELDER: AC alternator and control circuit produce steady arc. Handles up to 3/16-in. electrodes. 10 current settings: 50, 60, 75, 90, 105, 120, 140, 160, 180, 200-amps.

ALTERNATOR: 3500 w. Two 120-v. outlets for auxiliary AC output.

SIZE: 36x29x27 1/4 in. high, with 2-man carrying frame.

ELEC. INFO: DC welding output: 50-200-amp range, 28-volt AC auxiliary output: 120-volt, 60-Hz. **ORDER INFO:** See Warranty p. 36; shipping note at left. 12-v. Garden-Recreation DieHard® Battery (not incl.)... order 28-96032N from Big Book. Shipping weight 445 pounds. F9 HT 20199N \$1395.00

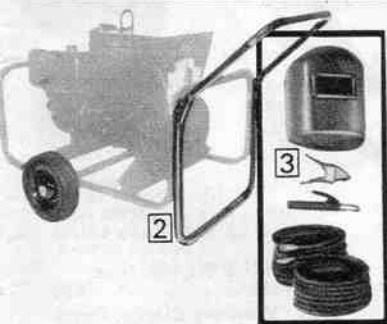

(2) Dolly Kits. Tubular steel. Rubber-tired wheels.

ORDERING INFO: Shpg. wt. 25 lbs.

For F9HT20194N, F9HT20198N.

F9 HT 20195 Kit \$69.95

For F9HT20199N.

F9 HT 2019 Kit 89.95

(3) Accessory Kit. For welder/generators at right. Includes full-face welder's helmet, 18-ft. electrode cable, 12-ft. ground cable, holder, clamp.

ORDERING INFO: Shpg. wt. 12 lbs.

F9 HT 20196 Kit \$49.95

SHPG. NOTE: "F" items (as F9HT20194N) sent from factory in Minneapolis, Minn. (exc. F9HT20196 from Paris, Tenn.). For items with "N" suffix, pay motor carrier from factory; items without "N" suffix pay shpg. handling from Dist. Center. Allow extra time. No C.O.D.'s.



Gas Torch Outfits are best suited for cutting, brazing and heating jobs... may also be used for welding

CRAFTSMAN® Porta-Torch™

Cuts steel up to 1 in. thick (with optional tip) and brazes all types of metals. Uses MAPP® and oxygen gases. Completely portable, weighs less than 30 pounds... carry cylinders, torch, regulators and all accessories to the job site in the 18x10½-inch wide carrying case

\$149⁰⁰ outfit with cylinders



\$69⁰⁰
kit without cylinders

CRAFTSMAN® Cut 'n Weld Oxy-Acetylene Torch Kit

Cuts steel up to 1 in. thick (with optional tip); welds steel up to ½ in. thick

TORCH: Brass-forged head and body, Lexan® plastic handle. Built-in anti-reverse flow valves. Use same torch for brazing or cutting... simply change tips. Color-coded control valves (green for oxygen, red for MAPP® gas). Stainless steel valve stems give you precise flame settings. Includes 2 tips... cutting tip for cutting steel up to ½ in. thick and brazing tip for brazing steel. Torch can cut steel up to 1 in. thick with optional tip (9 HT 54436) sold separately at right.

REGULATORS: Pre-set... no pressure adjustments required.

ACCESSORIES: 8-ft. flexible twin-rubber neoprene hose with brass fittings; goggles; spark lighter; polyethylene carrying case with molded-in compartments for cylinders; torch; brazing rods and operating instructions.

CYLINDERS: Filled MAPP® gas cylinder holds 16.0 oz. by weight... lasts approx. 4 times longer than similar amount of acetylene. Empty, refillable oxygen cyl. holds 30 cu. ft., instr. for filling.

ORDER INFO: See Warranty, Note below.
9 HT 5448C—Wt. 19 lbs. \$149.00

Acetylene Regulator. (Not shown.)

Lets you use acetylene instead of MAPP® gas with Porta-Torch™.

ORDER INFO: See warranty below.
9 HT 54308—Wt. 12 oz. \$12.95

Pressure Gauge. (Not shown.)

ORDER INFO: Indicates amount of oxygen in cylinder.

9 HT 54463—Wt. 1 lb. 3 oz. \$14.95

No. 1 Cutting Tip. (Not shown.)

For both Porta-Torch™ and Cut 'n Weld Torch Kit. Cuts steel to 1 in.

ORDERING INFORMATION:
9 HT 54436—Wt. 3 oz. \$5.95

Brazing/Welding Tip. (Not shown.)

Use with Porta-Torch for larger brazing jobs; Cut 'n Weld to weld to ½ in.

ORDERING INFORMATION:
9 HT 54462—Wt. 3 oz. \$4.99

TORCH: Brass-forged head and body with Lexan® plastic handle. Use same torch for welding and cutting steel... simply change tips. Stainless steel valve stems give you precise flame settings. Includes two tips... cutting tip for cutting steel up to ½ inch thick, welding tip for welding steel up to ½ inch thick. Torch can cut steel up to 1 inch thick with optional No. 1 cutting tip (9 HT 54436) sold separately at left.

REGULATORS: Pre-set... no pressure adjustments required.

ACCESSORIES: Includes 8-foot flexible twin-rubber neoprene hose with brass fittings; safety goggles; spark lighter and instruction manual.

ORDERING INFORMATION:
See Full One Year Warranty below.
Shipping weight 5 pounds 7 ounces.
9 HT 5447 \$69.00

MAPP® Gas Regulator. (Not shown.)

Lets you use MAPP® gas instead of acetylene with Cut 'n Weld Kit. Aluminum. 1½-inch diameter gauge.

ORDER INFO: Warranty below.
9 HT 54307—Wt. 6 oz. \$12.95

Acetylene Cylinder Adapters. (Not shown.)

For regulator in Cut 'n Weld Kit to adapt different size cylinders.

TYPE, ORDERING INFO:

For "B" Cylinders. Adapts CGA200 to CGA520.
9 HT 54478—Wt. 1 lb. 2 oz. \$5.49

For "POL" Cylinders. Adapts CGA200 to CGA510.
9 HT 54479—Wt. 1 lb. 2 oz. \$5.49

Shpg. Note: Alaska, Hawaii customers... propane, MAPP® gas cylinders must, by law, be sent via surface transportation. Contact your local Selling Unit for info.

Gas Torch Accessories



(1) Gas Rod Assortment. 52 copper-coated welding rods; 20 each ⅛, ¼, ½, ¾, 1 in. diam. Also 15 flux-coated brazing rods; nine ⅛, ¼, ½, ¾, 1 in. diam. six 1½ in. diam.

ORDERING INFORMATION: Pkg. of 67 rods.
9 HT 20061—Wt. 2 lbs. 8 oz. Pkg. \$9.95

Copper-coated Gas Rods (Not shown).

ORDER INFO: 18-in. Approx. 80 per pkg. Shipping weight 5 pounds 2 ounces.

9 HT 20404—¾-in. diam. Pkg. of 25 \$5.95
9 HT 20406—½-in. diam. 4.95

Tip Cleaners (Not shown). For welding and cutting tips.

ORDERING INFO: Set of 9 with case.
9 HT 5425—Shpg. wt. 4 oz. Set \$2.95

(2) Flux-coated Gas Brazing Rods. 18-in.

ORDERING INFO: Shpg. wt. 1 lb. 4 oz.
9 HT 20464—¾-in. diam. Pkg. of 25 \$5.95
9 HT 20466—½-in. diam. Pkg. of 14 5.45

(3) Oxy-acetylene Welders' Handbook.

Instructions, hints, 306 pages, illustrated.
ORDERING INFORMATION:
9 HT 5411—Shipping wt. 10 oz. \$5.49

(4) Neoprene twin-type Welding Hose.

Oil-resistant. 20-foot long. Brass fittings.
ORDERING INFORMATION:
9 HT 54271—Shpg. wt. 5 lbs. 2 oz. \$15.99

(5) Adapters for Acetylene Tanks.

TYPE, ORDER INFO: Adapts regulators in 9-5441, 9-5443 Torch outfits to different size cyl. For "B" Cylinders. Adapts CGA510 to CGA520.
9 HT 5408—Shpg. wt. 1 lb. 2 oz. \$5.49
For "MC" Cyl. Adapts CGA510 to CGA200.
9 HT 5409—Shpg. wt. 1 lb. 2 oz. \$5.49

(6) Reverse Flow-check Valves.

Designed to stop accidental mixing of oxygen and fuel gas in hose and regulator. Factory tested. UL listed. Includes 2 check valves.

ORDER INFO: Fits all Torch Outfits on p. 39.
9 HT 54423—Shpg. wt. 5 oz. \$8.95

(7) Spark Lighter. For lighting torch. 1 flint.

ORDERING INFORMATION:
9 HT 5440—Shpg. wt. 4 oz. \$5.95

(8) Extra Flints for (7). Pkg. of 6 flints.

ORDERING INFORMATION:
9 HT 54405—Shpg. wt. 2 oz. Pkg. \$5.95

(9) Soap Stones. For marking intended area of metal to be cut with gas torch. Package of 4.

ORDERING INFO:
9 HT 54461—Wt. 6 oz. 79c

(10 thru 13) Clamping Tools. Hold materials for welding or cutting.

CONSTRUCTION: Alloy steel is heat-treated for strength. Nickel-plated to resist rust.

(10) Chain Clamp. Holds and locks around any shaped stock. Adjusts to ratchet action. Won't crush thin-wall tubing. 19-inch long chain.

ORDER INFO: Wt. 1 lb. 14 oz.
9 HT 54484 \$9.95

(11) Sheet Metal Tool. Adjusts to pliers action. 8 in. long. 3¼-in. jaw width. 1¼-in. throat depth.

ORDER INFO: Wt. 1 lb. 5 oz.
9 HT 54481 \$5.95

(12) "C" Clamp. Set jaws, squeeze to lock... frees both hands. 11 in. long. Jaws adjust 3¼ in.

ORDER INFO: Wt. 1 lb. 14 oz.
9 HT 54483 \$6.95

(13) Welding Clamp. Deep-throated. U-shaped jaws adjust 1½ in. ... lock in place, provide visibility. 9-in. long.

ORDER INFO: Wt. 1 lb. 10 oz.
9 HT 54482 \$6.95

(14) Welders' Goggles. Polyethylene, adjustable headband. Fits over glasses. No. 5 filter, 2x4¼-inch window.

ORDERING INFO: Wt. 9 oz.
9 HT 18636 \$7.49

No. 5 Replacement Filter Plate. To cut steel to 6 in., weld to ½ in.

9 HT 13275—Wt. 4 oz. \$1.59

(15) Welders' Gloves. Cowhide. Cotton flannel lining.

SIZES: M(9-9½), L(10-10½).
ORDER INFO: State M or L.
N51 HT 26022F—Wt. 13 oz. \$6.97



\$134.00
without cylinders

CRAFTSMAN® Single-stage Oxy-Acetylene Torch Outfit

General-purpose Unit for home, shop, farm or garage . . . Cut steel up to 2 inches thick and weld steel up to 1/4-in. thick with optional tips

TORCH: Brass-forged body. Stainless steel valve stems for delicate flame settings. Anti-flashback mixer with needle shut-off valve that seals tight. Includes three welding tips (Nos. 3, 5 and 7) to fusion weld steel up to 1/4-inch thick.

CUTTING ATTACHMENT: Brass-forged. No. 0 tip cuts steel up to 1/2 inch thick. Torch can cut steel up to 2 inches thick with optional cutting tips sold at right.

REGULATORS: Single-stage regulation. Two pressure-tested, brass forged regulators. Regulators have 2-inch diameter gauges with white-on-black faces for easy visibility and Lexan® plastic covers.

ACCESSORIES: Includes 12 feet of Siameez hose with brass fittings, safety goggles, spark lighter, wrench and operating instructions.

ORDERING INFORMATION: See Warranty on page 38.

Single-stage Oxy-Acetylene Outfit.
9 HT 5443—Shipping weight 14 pounds \$134.00

Welding Torch alone.
9 HT 54401—Shipping weight 14 ounces 34.95

Cutting Attachment alone.
9 HT 54402—Shipping weight 14 ounces 34.95

Oxygen Regulator alone.
9 HT 54403—Shipping weight 4 lbs. 4 oz. 34.95

Acetylene Regulator alone.
9 HT 54404—Shipping weight 4 lbs. 4 oz. 34.95

Cylinder Outfits and Trucks

(16) Portable Oxygen-Acetylene Cylinder Outfit
Steel cylinders, machined brass valves. Storage, carrying rack. Acetylene "MC" cylinder holds 10 cu. ft.; oxygen "R" tank holds 20 cu. ft. Measures 14x8x26 in. high.

ORDER INFO: Requires "MC" adapter (9HT5409) keyed (5) on p. 38. Shipped empty, with local filling instr.
9 HT 5406C—Shipping weight 28 pounds Kit \$139.00

(17) Truck for Gas Cylinders. Holds 2 cylinders (not incl.): 1 oxygen (145-cu. ft.); 1 acetylene (122-cu. ft.). Can be used as utility cart. Platform base 20x10 1/2 in. deep. Overall: 38 1/2 in. high. Tubular steel frame. Tool tray. 10-in. semi-pneumatic rubber-tired wheels.

ORDERING INFO: See "N" suffix note on p. 82.
9 HT 5429N—Shipping weight 27 pounds \$39.95

(18) Hvy-duty high-wheel Truck for Gas Cylinders
Handles up to two 300 cu. ft. cylinders for combined cylinder diam. of 18 3/4 in. One-in. nylon straps help keep cylinders securely in place. Platform base 21x9 1/2 in. deep. Stands 28x46 in. high. Tubular frame of 14-ga. steel. Wheels have 1/4-in. steel spokes electrically welded in place. Pneumatic rubber-tired wheels, 20x2.125 in. for easy rolling over rough surfaces.

ORDERING INFORMATION:
9 HT 54291L—Shipping weight 46 pounds \$85.00

Welding Tips. For welding torch in outfit (9 HT 5443) and welding torch (9 HT 54401) only.

SIZES, ORDERING INFO:

Catalog Number	Tip size	Welding capacity
9 HT 54431	No. 1	up to 1/2 in.
9 HT 54432	No. 3	1/2 to 1/4
9 HT 54433	No. 5	1/4 to 1/8
9 HT 54434	No. 7	1/8 to 1/16


Shpg. wt. 4 oz. Each \$4.95

Cutting Tips. For cutting attachment in outfit (9 HT 5443) and cutting attachment (9 HT 54402) only.

SIZES, ORDER INFO: Wt. 3 oz.

Catalog Number	Tip size	Cutting capacity, inches	Price each
9 HT 54435	No. 0	1/4 to 1/2	\$5.95
9 HT 54436	No. 1	1/2 to 1	5.95
9 HT 54437	No. 2	1 to 2	5.95

Propane Tip
9 HT 54438 [No. 1] 1/2 to 1 | 5.95

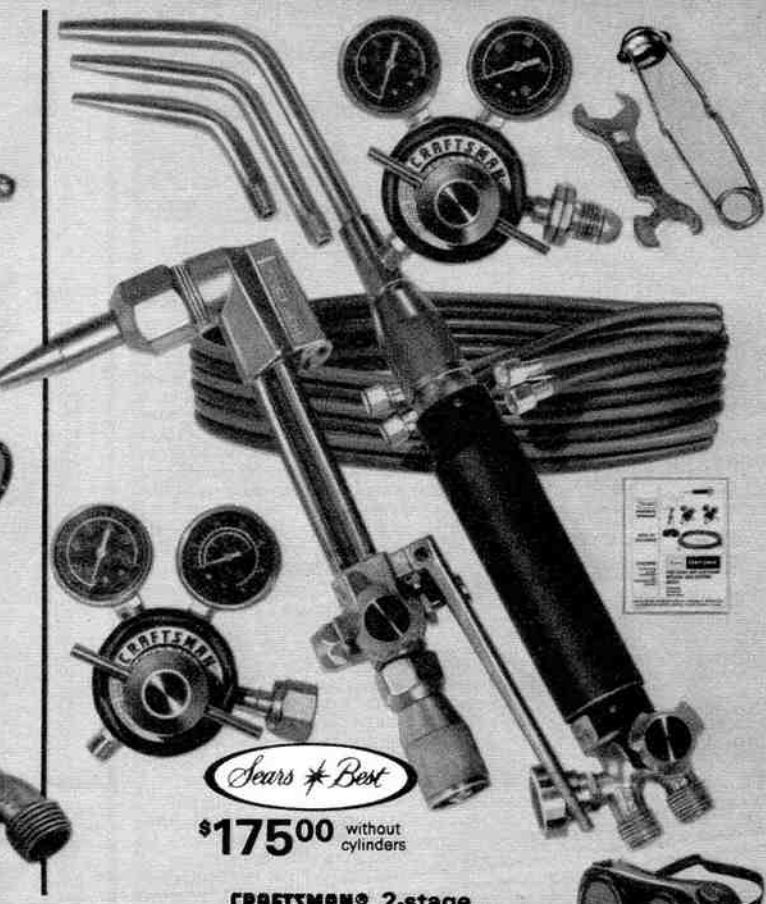

Sears * Best

\$175.00 without cylinders

CRAFTSMAN® 2-stage Oxy-Acetylene Torch Outfit

Our best gas outfit because 2-stage regulation maintains a constant pressure to torch . . . automatically makes adjustments as cylinder pressure changes

Cuts steel up to 6 inches thick and welds steel up to 5/16 inches thick with optional tips

TORCH: Brass-forged body. Stainless steel valve stems for delicate flame settings. Anti-flashback mixer with double "O" ring for leak-free, hand-tight connections. Comfort-balanced handle lets you weld for long periods of time without arm fatigue. Includes three welding tips (Nos. 3, 5 and 7) to fusion weld steel up to 1/4 inch thick. Torch can weld steel up to 5/16 in. thick with optional tips sold at right.

CUTTING ATTACHMENT: Brass-forged cutting head. Includes No. 1 cutting tip that cuts steel up to 1 inch thick. Torch can cut steel up to 6 inches thick with optional cutting tips sold separately at right.

REGULATORS: Two-stage regulation maintains constant pressure to torch . . . you won't need to make adjustments as cylinder pressure drops. Two pressure-tested, brass-forged regulators have larger handles than our single-stage outfit . . . makes setting pressure easier when wearing gloves. Regulators have 2-inch diameter gauges with easy-to-read white-on-black faces and Lexan® plastic covers.

ACCESSORIES: Includes 20 feet of Siameez hose with brass fittings, vinyl plastic cover-all goggles, spark lighter, wrench and operating instructions.

ORDERING INFORMATION: See Warranty on page 38.

2-stage Oxy-Acetylene Outfit.
9 HT 5441C—Wt. 20 lbs. \$175.00

Welding Torch alone.
9 HT 54406—Wt. 1 lb. 11 oz. 39.50

Cutting Attachment alone.
9 HT 54407—Wt. 1 lb. 11 oz. 42.50

Oxygen Regulator alone.
9 HT 54302—Wt. 4 lbs. 54.00

Acetylene Regulator alone.
9 HT 54303—Wt. 4 lbs. 54.00

Welding Tips. For use with welding torch 9 HT 54406 sold at left or with outfits 9-5441, 9-5444, 9-5446 only.

SIZES, ORDER INFO:

Catalog Number	Size	Capacity inches
9 HT 54441	No. 1	up to 1/2 in.
9 HT 54442	No. 2	1/2 to 3/4
9 HT 54443	No. 3	3/4 to 1
9 HT 54444	No. 4	1 to 1 1/2
9 HT 54445	No. 5	1 1/2 to 2
9 HT 54446	No. 6	2 to 3
9 HT 54447	No. 7	3 to 4
9 HT 54448	No. 8	4 to 5 1/2

Shpg. wt. ea. 5 oz. Ea. \$5.95

Cutting Tips. For use with cutting attachment 9 HT 54407 sold at left or with outfits 9-5441, 9-5444 and 9-5446 only. Propane and MAPPG® Gas tips let you use alternate fuels in areas where acetylene is unavailable or inconvenient to use.

SIZES, ORDER INFO:
Oxy-Acetylene Tips . . . Wt. 5 oz. Propane, MAPPG® Gas Tips . . . Shpg. wt. 4 oz.


Catalog Number	Tip size	Cutting capacity, inches	Price each
Oxy-Acetylene Tips			
9 HT 54451	No. 0	1/4 to 1/2	\$6.49
9 HT 54452	No. 1	1/2 to 1	6.49
9 HT 54453	No. 2	1 to 2	6.49
9 HT 54454	No. 3	2 to 3	6.49
9 HT 54455	No. 4	3 to 6	6.49

Propane Tips
9 HT 54456 [No. 1] 1/2 to 1 | \$6.49
9 HT 54457 [No. 3] 2 to 3 | 6.49

MAPPG® Gas Tips
9 HT 54458 [No. 1] 1/2 to 1 | \$6.49
9 HT 54459 [No. 3] 2 to 3 | 6.49

4-gal. Wall-mount Wet/Dry Vac holds 2 1/4 gallons of liquid or 1/5 bushel of dry debris

Stationary mount keeps vac up and out of your way . . . 18-foot hose makes it almost as handy as roll-about models

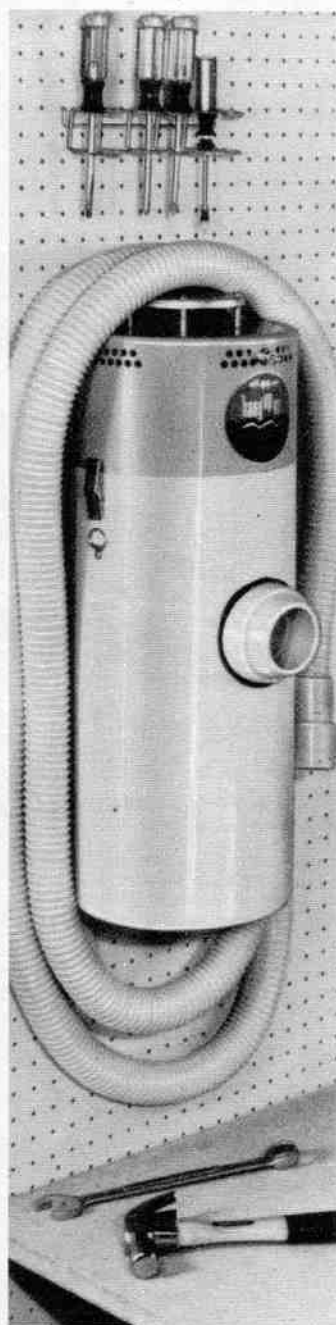

40 Sears COMPBK SLAEGJO

Wet/Dry Vac with 18-ft. hose **\$110.00**

Wall-mount Wet/Dry Vac. Industrial-type vac designed for use where space is limited in factories, stores, laboratories, as well as your laundry room, basement, workshop or garage. Picks up sawdust, wood chips, nails and other dry debris plus standing water, suds or spilled liquids.

MOTOR: Ball-bearing, 2 stage type. Steel housing with yellow porcelain enamel finish.

FILTER: Permanent-type paper filter cartridge . . . removes for cleaning, remains in vac during both wet and dry pickups.

TANK: Seamless steel with beige porcelain enamel finish that resists chipping and rust. Tank snaps off motor assembly for emptying contents. Unit measures 23 1/2 inches high, 8 1/2-inch diameter.

ACCESSORIES: Includes 18-ft., 1 1/2-inch diam. vinyl hose. Additional hose, vac accessory kit sold separately below.

INSTALLATION INFO: Bracket anchors to wall with 5 screws (incl.) Motor assembly and tank hang-up on bracket.

ELECTRICAL INFORMATION: Operates on 120 volt, 60-Hertz AC. 720 watts. With 8-foot 3-wire cord.

ORDERING INFORMATION: Not Craftsman. See Warranty (B) on facing page.

Shipping weight 20 pounds.
T9 HT 1791C \$110.00

Wall-mount Dry Vac. Similar to Wall-mount Wet/Dry Vac described above except for dry pick-up only. Holds 1/5 bushel of dry debris.

ORDERING INFORMATION: Not Craftsman. See Warranty (B) on facing page.

Shipping weight 19 pounds.
T9 HT 1790C \$95.00

Extra Hose. For either vac above. Vinyl. 18-foot long, 1 1/2-inch diameter.

ORDERING INFORMATION: Shpg. wt. 2 lbs. 8 oz.
T9 HT 17903 \$19.95

Accessory Kits for Wall-mount Vacs

KIT COMPOSITION: 6-piece kits with 1 1/2-inch diameter accessories. Two-piece extension wand . . . chrome-plated steel, measures 40 in. long assembled. One 14-in. master nozzle with 3 snap-in inserts: squeegee shoe with rubber insert for picking up liquids, rug shoe for carpeting and brush shoe for floors.

ORDERING INFORMATION:
Steel Accessory Kit. Master nozzle and 3 inserts made of steel. Extension wand above. Shipping weight 7 pounds.
T9 HT 17901C Kit \$49.00

Plastic Accessory Kit. Master nozzle and 3 inserts made of plastic. 2-piece extension wand described above. Shipping weight 6 pounds.
T9 HT 17902C Kit \$34.00



\$39.00

CRRAFTSMAN® Home-N-Shop Dry Pick-up Vac holds 1/5 bushel of dry debris

MOTOR: Sealed ball and sleeve bearing type.
FILTER: Permanent-type filter cartridge. For dry pick-up only.
TANK: Gold-color polypropylene plastic. Hinged, lift-off steel lid with plastic cover and handle. 14 1/2-in. high, 15-in. diam. Rolls on 4 snap-in casters.
ACCESSORIES: Incl. adapter to use 1 1/4-in. diam. accessories; 1 1/4-in. diam., 6-ft. hose and utility nozzle. Uses 1 1/4 or 2 1/2-in. diam. accessories.
ELECTRICAL INFORMATION: 110-120 v., 60-Hz. AC. 570-w. UL listed. With 8-ft. 3-wire cord.
ORDERING INFO: See warranty (A), facing page.
9 HT 17844L—Shipping weight 16 lbs. \$39.00



Accessories for Home-N-Shop Vacs

2 1/2-in. diameter Accessories

Best for picking up bulky debris such as woodchips

(1) **Extension Handle.** Two-piece plastic tube measures 46 inches long when assembled . . . extends work area.
9 HT 16964—Wt. 1 lb. 10 oz. \$5.95

(2) **3-pc. Attachment Set.** Includes plastic crevice tool, blower nozzle and round soft bristle brush.
Shipping weight 1 lb. 4 oz.
9 HT 16973 Set \$5.95

(3) **Flexible Hose.** Plastic, wire reinforced. 6 feet long. Includes connector for joining two hoses.
9 HT 17818C—Shpg. wt. 3 lbs. \$8.45

(4) **Auto Attachment.** Plastic. For cleaning auto trunks and interiors.
9 HT 16978—Shpg. wt. 8 oz. \$3.25

(5) **Wet Nozzle.** Plastic body with rubber squeegee insert. 14 inches wide.
9 HT 17817—Wt. 1 lb. 4 oz. \$6.95

(6) **Dry Nozzle.** Plastic body with brush and end rollers. 14 inches wide.
9 HT 16925—Wt. 1 lb. 3 oz. \$6.75

Attachment Kit. Separate prices total \$27.10. Incl. (1), (2), (3), (6) above. Shipping weight 6 pounds.
9 HT 16975C Kit \$24.50

1 1/4-in. diameter Accessories

Not for use with 16, 32 or 45-gal. vacs sold on facing page

(7) **Auto Attachment.** Plastic.
9 HT 17868—Shpg. wt. 5 oz. \$2.45

(8) **Utility Nozzle.** Plastic, 5 in. wide.
9 HT 17867—Shpg. wt. 7 oz. \$2.25

(9) **Crevice Tool.** Plastic, 9 in. long.
9 HT 17863—Shpg. wt. 5 oz. \$1.95

(10) **Extension Handle.** 2-pc. plastic tube measures 38 in. long assembled.
9 HT 17861—Wt. 1 lb. 1 oz. \$4.95


(11) **Flexible Hose.** Vinyl, wire reinforced. 6 feet long.
9 HT 17866—Wt. 1 lb. 12 oz. \$6.45

(12) **Wet Nozzle.** Plastic body with rubber squeegee insert. 14 in. wide.
9 HT 17865—Wt. 1 lb. 2 oz. \$6.45

(13) **Dry Nozzle.** Plastic body with brush and end rollers. 14 in. wide.
9 HT 17864—Wt. 1 lb. 1 oz. \$5.95

(14) **Brush Attachment.** Plastic body with soft bristles. 2 in. diam.
9 HT 17862—Shpg. wt. 6 oz. \$2.45

Attachment Kit. Sep. prices total \$21.75. Includes (9), (10), (12), (13), (14) described above.
9 HT 17869—Wt. 3 lbs. 5 oz. Kit \$19.50

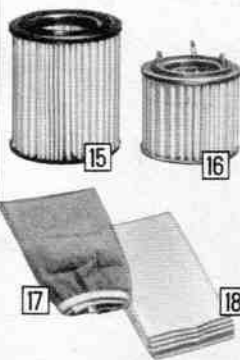


Replacement Vac Filters

(15) **Washable Wet/Dry Cartridge Filter.** Permanent-type. To clean, just remove, rinse, replace. Made of styrene, rubber and phenolic impregnated paper. Fits former 9-17851, 9-17855, 9-1787, 9-1788, 9-17885, 9-1792 and 9-1793.
ORDER INFO: Wt. 1 lb. 11 oz.
9 HT 17809 \$5.99

(16) **Cartridge Filter.** Like (15). Fits 17844 above; also 9-1690, 9-1780, 9-17812, 9-1784.
ORDERING INFORMATION:
9 HT 17807—Wt. 1 lb. 8 oz. \$5.95

(17) **Cloth Filter Bag.** Fits former 9-17821, 9-17831, 9-1785 only. Use with paper bags (18) below.
ORDERING INFO: Shpg. wt. 4 oz.
9 HT 16967 \$2.50

(18) **Paper Filter Bags.** Use with cloth filter bag (17) sold above. Pkg. of 5.
ORDERING INFO: Shpg. wt. 4 oz.
9 HT 16946 Pkg. \$1.95

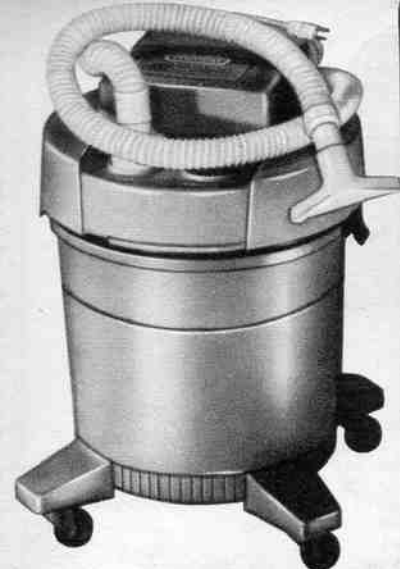

**CRAFTSMAN® Home-N-Shop
8-gallon Wet/Dry Vac
holds 1/4 bushel dry debris
or 5 gallons of liquid
\$79.99**

This compact vac is powerful enough to pick up tracked-in dirt, broken glass, nails, gravel, even standing water . . . stores easily in small area.

MOTOR: Sealed ball and sleeve bearing type. High efficiency blower wheel with patented bleed-off air vents helps develop and maintain increased air velocity for greater pick-up power. Converts to blower action by placing hose in exhaust port. Suction shuts off when tank is full during wet pick-ups. On-off switch and wrap-around cord storage arm located on motor housing.

FILTER: Permanent-type paper filter cartridge removes for cleaning . . . remains in place during both wet and dry pick-ups.

TANK: Muted green plastic tank with light green lid is rustproof; resists chipping, cracking, peeling. Lid snaps off for emptying contents. Neoprene foam-rubber lid gasket retains its original shape to help prevent power robbing leaks. 25 in. high, 21-in. diam.

ACCESSORIES: Incl. adapter for using 1 1/4-in. accessories; 6-ft., 1 1/4-in. diam. flexible vinyl hose; rectangular utility nozzle; 4-caster dolly assembly. Use 1 1/4 or 2 1/2-in. diam. accessories sold on facing page.

ELECTRICAL INFORMATION: 110-120-v., 60-Hz. AC. 900 watts. 16-foot 3-wire cord. UL listed.

ORDERING INFORMATION: See warranty (A) below.

9 HT 17885L—Wt. 23 lbs. . . \$79.99

Six-piece Vac Outfit. Includes vac and accessories described above plus extension handle (10) and wet nozzle (12) on facing page.

ORDERING INFORMATION: Separate prices total \$91.39.

9 HT 17887L3—Wt. 26 lbs. . . \$85.00

(A) FULL ONE YEAR WARRANTY ON CRAFTSMAN® HOME-N-SHOP VACS: If, within one year from the date of purchase, any of these Craftsman Home-N-Shop Vacs fails due to a defect in material or workmanship, Sears will repair it, free of charge. Warranty service is available by simply returning the Home-N-Shop Vac to the nearest Sears store or Service Center throughout the United States. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

(B) FULL 90-DAY WARRANTY: If, within 90 days from the date of purchase, any of these Sears Wall-mount Vacs fails due to a defect in material or workmanship, Sears will repair it, free of charge. Warranty service is available by simply returning the Wall-mount Vac to the nearest Sears store or Service Center throughout the United States. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

These CRAFTSMAN® Home-N-Shop Vacs have our most powerful utility vac motor . . . they pick up nails, sawdust, gravel, even water *fast!*

In actual tests under lab conditions, they produced these results*:

*Tests witnessed by
Nationwide Consumer
Testing Institute



RUNS ON 110-120-V.

Plugs into
this outlet

**16-gallon size holds
1.8 bushels of dry debris
or 13 gallons of liquid
\$114.00**

**32-gallon size holds
3.5 bushels of dry debris
or 26 gallons of liquid
\$129.00**

Here are 3 reasons these vacs develop and maintain the high velocity air flow needed for fast pick-ups:

(a) High-efficiency blower wheel is coupled with powerful ball bearing motor to generate high-speed air flow. (b) Patented bleed-off air vents together with large exhaust port let extra air out of tank. Helps keep back pressure inside vac at a minimum for increased pick-up power. (c) Neoprene foam-rubber lid gasket retains its original shape even after numerous re-sealings. Tank lid maintains positive seal against power robbing leaks.

MOTOR: Sealed ball bearing for quiet operation and long life. Suction automatically shuts off when tank is full during wet pick-ups. Converts to blower action when hose is placed in exhaust port. On-off switch mounted on motor.

FILTER: Permanent-type paper filter cartridge has 3 times the filtration surface of most bag-type filters. Removes for cleaning . . . just rinse with water and replace in vac. Stays in place during both wet and dry pick-ups.

ACCESSORIES: Includes 6-ft., 2 1/2-in. diam. flexible hose and rectangular utility nozzle for general clean-ups. With 4-caster dolly assembly. Use additional 2 1/2-in. diam. accessories sold separately on facing page.

ELECTRICAL INFORMATION: Double insulated, never needs grounding . . . uses standard 2-prong outlet. Operates on 110-120 volt, 60-Hertz AC. 1200 watts. With 16-foot 2-wire cord. UL listed.

(1) 16-gallon tank size

TANK: Red, high-impact polypropylene plastic . . . won't rust or dent; resists chipping and peeling. Black steel lid with neoprene foam rubber gasket. Red plastic motor housing. Lid snaps off for dumping dry debris. Side-mounted drain plug for emptying liquids. Stands 28 3/4 in. high, 22 1/2-in. diameter.

ORDERING INFORMATION: See "N" suffix on page 82 and warranty (A) at left.

9 HT 1787N—Wt. 35 lbs. \$114.00

32-gallon tank size (not shown . . . similar to (1) at left).

TANK: Red, high-impact polypropylene plastic . . . rustproof. Black steel lid with neoprene foam rubber gasket. Red plastic motor housing. Lid snaps off for dumping dry debris. Side-mounted drain plug for emptying liquids. 34 3/4 in. high, 26 1/2-in. diameter.

ORDERING INFORMATION: See "N" suffix on page 82 and warranty (A) at left.

9 HT 1793N—Wt. 37 lbs. \$129.00

NAIL TEST: Picked up an average of 1600 (5.9 pounds) 1/8-inch roofing nails in 15 seconds

SAWDUST TEST: Picked up 1/2 bushel of fine, dry sawdust in an average of 6.8 seconds

GRAVEL TEST: Picked up an average of 4.4 lbs. of gravel (3/4-in. average diameter) in 30 seconds

WATER TEST: Picked up 1 gal. of standing water in less than 1 second (average of 0.82 sec.)



**45-gal.
tank size
holds
4.25 bu.
dry debris,
38 gal.
liquid**

Our largest capacity vac is
ideal for industrial applications

\$149.00


(2) 45-gallon tank size

TANK: Gray, hi-density Permanex® plastic . . . won't rust or dent. Black steel lid with neoprene foam rubber gasket. Red plastic motor housing. Lid snaps off for dumping dry debris. Side-mounted drain plug for emptying liquids. Stands 43 3/4 in. high, 26 1/4-in. diameter.

ORDERING INFO: See "N" suffix, page 82 and warranty (A) at left.

9 HT 1788N—Wt. 54 lbs. . . \$149.00

Trash Receptacles

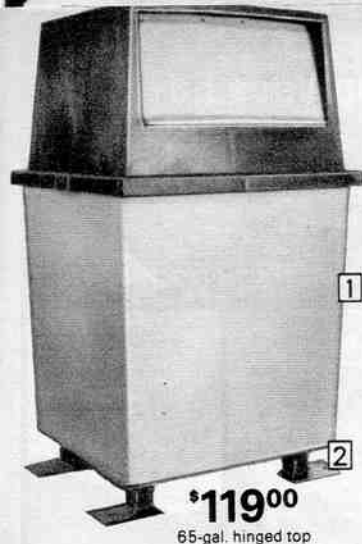

\$119.00

65-gal. hinged top



\$26.99

32-gallon mobile can



\$19.99

10-gallon



\$34.99

15-gallon



\$19.99

25-gallon

(1) Two-door square-top Receptacle

CONSTRUCTION: Sturdy structural plastic, $\frac{3}{16}$ -in. walls resist chipping, denting and peeling. Colors resist fading. 27 $\frac{1}{2}$ x25 $\frac{1}{2}$ x43 $\frac{1}{2}$ in. high.

CAN: 65-gallon capacity. Four drain holes in bottom.

TOP: Hinged to can with heavy-duty, rust-resistant plated spring hinges, attached with rust-proof stainless steel rivets. 2 self-closing doors. Molded in-lip door bottom.

STYLES, COLORS, ORDERING INFO: See Shpg. Note at right.

Orange hinged top with brown base. Wt. 67 lbs. F11 HT 63004N \$119.00

Orange removable top with brown base. Wt. 62 lbs. F11 HT 63001N \$109.00

Brown hinged top with beige base. Wt. 67 lbs. F11 HT 63006N \$119.00

Brown removable top with beige base. Wt. 62 lbs. F11 HT 63003N \$109.00

(2) Optional Leg Kit. Includes four 3 $\frac{1}{2}$ -in. black epoxy-coated steel legs plus one-bolt mounting hardware. **ORD. INFO:** See Shpg. Note. F11 HT 63007—Wt. 5 lbs. . \$9.99

Plastic Liners. 28x25x46 inches high. Package of 100. **ORDERING INFORMATION:** See Shipping Note at right. F11HT63008—Wt. 29 lbs. \$33.99

(3) Mobile Industrial Receptacles.

CONSTRUCTION: Copolymer medium density resin. Molded-in handles. Mobile units mounted to 3-inch ball-bearing casters. Lids and covers for receptacles sold separately below.

SIZES, COLORS, ORDERING INFORMATION: See Shipping Note at right.

32-gallon size. 22x30 in. high. Wt. 19 lbs. F11 HT 63073N—Gray \$26.99 F11 HT 63075N—Yellow 26.99

44-gallon size. 24x36 in. high. Wt. 25 lbs. F11 HT 63076N—Gray \$39.99 F11 HT 63078N—Yellow 39.99

Freestanding Receptacles. Same as above, but without casters.

20-gallon size. 19 $\frac{1}{2}$ x22 $\frac{1}{2}$ in. high. Wt. 6 lbs. F11 HT 63055N—Gray \$14.99

32-gallon size. 22x27 $\frac{1}{4}$ in. high. Wt. 9 lbs. F11 HT 63059N—Gray \$19.99 F11 HT 63062N—Yellow 19.99

44-gallon size. 24x31 $\frac{1}{2}$ in. high. Wt. 15 lbs. F11 HT 63066N—Gray \$29.99 F11 HT 63068N—Yellow 29.99

Flat Lids. (Not shown.) Fit mobile and freestanding receptacles. Same construction as receptacles (3) above.

20-gallon size Lid. Shpg. wt. 2 lbs. F11 HT 63057—Gray \$1.99

32-gallon size Lid. Shpg. wt. 3 lbs. F11 HT 63063—Gray \$3.99 F11 HT 63065—Yellow 3.99

44-gallon size Lid. Shpg. wt. 3 lbs. F11 HT 63069—Gray \$6.99 F11 HT 63072—Yellow 6.99

(4) Dome-top Cover. For 32-gallon Receptacle. Fits mobile or Free-standing units sold above.

CONSTR.: Injected-molded thermoplastic. **SIZES, COLORS, ORDERING INFO:** 22 $\frac{1}{2}$ x13 in. high. See Shipping Note at right. Wt. 10 lbs. F11 HT 63019—Gray \$17.99 F11 HT 63021—Yellow 17.99

(5) Square swing-top Receptacles

CONSTRUCTION: Blow-molded polyethylene.

COLORS, SIZES, ORDER INFO: Shpg. Note below.

10-gal. 11 $\frac{1}{2}$ x11 $\frac{1}{2}$ x28 $\frac{1}{2}$ in. Shpg. wt. 8 lbs. Beige/bronze F11 HT 63028 \$19.99

Avocado/gold F11 HT 63029 19.99

25-gal. 16 $\frac{1}{2}$ x16 $\frac{1}{2}$ x33 $\frac{1}{2}$ in. Shpg. wt. 14 lbs. Beige/bronze F11 HT 63032N2 \$25.99

Avocado/gold F11 HT 63033N2 25.99

32-gal. 16 $\frac{1}{2}$ x16 $\frac{1}{2}$ x38 in. Wt. 15 lbs. Beige/bronze F11 HT 63036N2 \$29.99

Avocado/gold F11 HT 63037N2 29.99

SHIPPING NOTE: "F" items shipped from Santa Fe Springs, CA., or St. Louis, MO. For items with "N" (as F11 HT 63004N) pay motor carrier charges from factory. For other items pay shipping and handling from Dist. Center. Allow extra time. No C.O.D. orders.


Trash Bags



CONSTRUCTION: 100% virgin polyethylene degradable film. Individually folded bags. Flat bottom. Twist ties included. All are redwood color.

SIZES AND ORDERING INFORMATION:

Catalog No.	Size (in.)	Gauge	Qty./pkg.	Shpg. wt.	Package
11 HT 61001C	20x22	.001	1000	10 lbs.	\$24.99
11 HT 61002C	24x24	.001	500	20 lbs.	16.99
11 HT 61003C	24x33	.001	500	28 lbs.	22.99
11 HT 61004C	30x37	.00125	250	25 lbs.	16.99
11 HT 61005C	30x37	.0015	250	28 lbs.	16.99
11 HT 61006C	33x40	.00125	250	25 lbs.	17.99
11 HT 61007C	33x40	.0015	250	33 lbs.	24.99
11 HT 61011C	38x60	.00175	100	28 lbs.	19.99

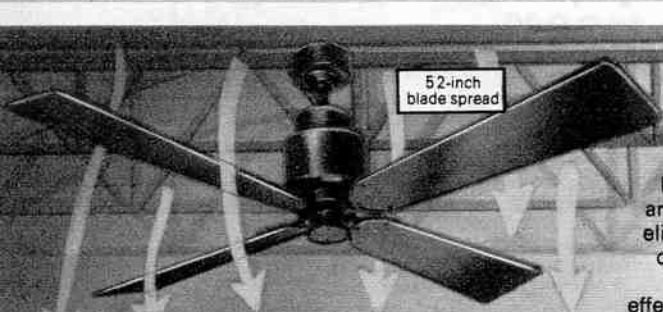

Ceiling Fan with 52-inch blade spread

Ceiling Fan

Significantly reduces heating costs in industrial and commercial buildings by eliminating heat stratification due to poor air circulation. It also increases the effectiveness of air conditioning.

\$127.99


Heat stratification occurs when warm air rises toward, and is trapped near, the ceiling. Warm air is eventually lost through the roof and upper walls. By installing a ceiling fan, the warm air is recirculated down to floor level to produce more uniform and comfortable air temperatures. The fan also provides circulating air comfort in large areas where there is no air conditioning.

CONSTRUCTION: Brown-color polystyrene blades and steel motor housing. **MOTOR:** 216-watt heavy-duty motor with high and low speeds. Permanently lubricated bearings.

INSTALLATION: For ceiling heights to 40 ft. Extends 13 in. from ceiling. Use no lower than 8 ft. from floor.

ELECTRICAL INFORMATION: UL listed 110-120-volt, 60-Hz AC.

ORDERING INFORMATION: 34 HT 9056C—Shpg. wt. 30 lbs. \$127.99

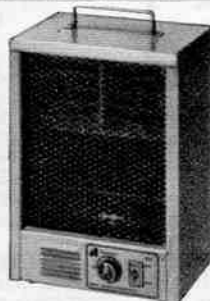

110-volt Utility Heater

For heavy-duty use . . . two settings deliver up to 5100 BTU's of heat

\$23.99

HEAT CONTROL: Front-mounted. Choose 1250 w. for 4250 BTU's and 1500 w. for 5100 BTU's of fan-forced heat. Thermostat. Positive off, heat limit switches.

CABINET: Tan-color enameled steel case, metal grill.

SIZE: Measures 10x6 $\frac{1}{2}$ x14 $\frac{1}{2}$ inches high.

ELECTRICAL INFORMATION: UL listed 110-120-volt, 60-Hz AC. 1250 or 1500 watts. 6-ft. cord.

ORDERING INFORMATION: See warranty below. 34 HT 7242—Shpg. wt. 12 lbs. 10 oz. \$23.99

FULL ONE YEAR WARRANTY ON HEATER: If, within one year from date of purchase, this heater fails due to a defect in material or workmanship, Sears will replace it, free of charge. Warranty service is available by simply returning the heater to the nearest Sears store throughout the U.S. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Move or haul anything from stacks of cartons to huge industrial pallets . . . capacities to 4500 lbs.



Rugged Pallet Truck with hydraulic lift

Handles loads to 4500 pounds **\$399⁰⁰**

(1) Heavy-duty Pallet Truck
Pallet truck has the largest moving capacity of any truck we sell. Powerful hydraulic lift. Choose the size you need.

CONSTRUCTION: 1-piece all-steel hydraulic unit with overload valve to prevent exceeding capacity. Full 200° turning radius for maneuvering ease. Three-position foot pedal, jacks up, locks and lowers loads. See wheel brake sold at right.

WHEELS: Two 8x2-inch double base wheels made of durable polyurethane. 3 1/4 x 4-inch fork load rollers are also polyurethane.

SIZES, ORDERING INFORMATION: See Shipping Note below.

Catalog Number	Fork Length	Truck Width	Wt. lbs.	Price
F9 HT 87256N	32 in.	27 in.	283	\$399.00
F9 HT 87251N	36 in.	17 1/2 in.	241	399.00
F9 HT 87254N	36 in.	20 1/2 in.	265	399.00
F9 HT 87257N	36 in.	27 in.	290	399.00
F9 HT 87252N	42 in.	17 1/2 in.	248	399.00
F9 HT 87205N	42 in.	20 1/2 in.	272	399.00
F9 HT 87258N	42 in.	27 in.	297	399.00
F9 HT 87253N	48 in.	17 1/2 in.	256	399.00
F9 HT 87255N	48 in.	20 1/2 in.	280	399.00
F9 HT 87206N	48 in.	27 in.	304	399.00


(2) Wheel Brake for (1) above. Steel. Stop loads by placing handle in down position. Includes installation hardware. **ORDER INFO:** See Shipping Note below. **F9 HT 87207N—Wt. 9 lbs. . . . \$65.00**



3
Steel Shelf Truck
500-lb. capacity
\$49⁹⁹

Hardwood Platform Truck has reinforced handle with rubber bumpers

4
24x48-in. deck
\$169⁹⁵

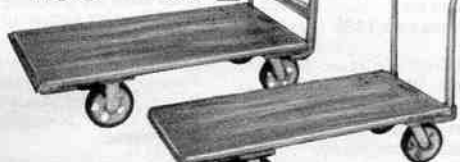

5
Hardwood Platform Truck with tubular steel handle
1500-lb. capacity
\$129⁹⁵

(3) Steel Shelf Truck . . . 500-lb. capacity. Ideal for toolrooms, warehouses, service stations and plants. Conveniently store and transport small parts and packages.

SIZE: Overall 32 in. high, 18 in. wide, 35 in. long. Two trays, each measure 16x30 in. long; 19 inch clearance between shelves.

CONSTRUCTION: Angle steel frame, shelves welded into 1 solid unit. Two 3-in. deep formed trays with rolled edges for added strength. Top tray is reversible. Tubular handle, enamel finish. Mounting hardware provided.

WHEELS: 5-inch heavy-duty rubber casters; 2 rigid and 2 swivel.

ORDER INFO: Unassembled. Shipping weight 35 lbs. **9 HT 87264C . . . \$49.99**

500-pound capacity. Like shelf truck shown above, except trays are 24x30 in. long. Overall, 26x35 in. long.

ORDER INFORMATION: See "N" suffix, p. 82. Shipping weight 52 lbs. **9 HT 87265N . . . \$59.99**

(4) Hardwood Platform Truck. 2000-pound capacity. Available in 2 sizes. **CONSTR.:** 1 1/2-in. thick hardwood. Tubular steel handle. Enamel finish. Deck is sanded then natural varnished. Rubber bumpers on pushbar and open platform end.

WHEELS: Bolted through hardwood crossboards and deck. 8x2-in. wheels (2 swivel and 2 rigid casters).

CAP., SIZES, ORDER INFO: Shpg. note below.

24x48-in. deck. **F9 HT 87266N—Wt. 115 lbs. . . . \$169.95**

30x60-inch deck. **F9 HT 87267N—Wt. 145 lbs. . . . \$189.95**

(5) Hardwood Platform Truck . . . 1500 or 2000-lb. capacity

CONSTR.: 1-in. thick hardwood; 2000-lb. has 1 1/2-in. . . both are kiln-dried. Reinforced beneath hardwood crossboards. Tubular steel handle; enamel finish.

WHEELS: Bolted through hardwood crossboards and deck.

CAP., ORDER INFO: See shpg. note below.

1500-lb. trucks have 6x2-in. wheels, 9 1/4-in. deck height; 2000-lb. trucks have 8x2-in. wheels, 11 1/8-in. deck height.

Catalog Number	Capacity lbs.	Width in.	Length in.	Shpg. wt. lbs.	Price
F9 HT 87231N	1500	24	48	85	\$129.95
F9 HT 87232N	1500	30	60	120	149.95
F9 HT 87233N	2000	24	48	115	149.95
F9 HT 87234N	2000	30	60	150	169.95

LOAD, CAPACITY: Holds 6-cu. feet. **TRAY, HANDLE:** Steel tray, 38 1/2 x 25 1/2 x 13-in. deep. Has enamel finish, rolled edges. Seamless for hauling cement. Hardwood handles have front tray supports. Steel nose guard and legs.

TIRE, WHEEL: 16-inch diameter pneumatic tire on permanently lubricated, ball-bearing wheel.

ORDERING INFO: Sent unassembled. See "N" shipping note, page 82. **9 HT 87874N2—Wt. 64 lbs. . . \$64.94**

SHIPPING NOTE: Items (1), (2) pay motor carrier charges from fcty. in New Bremen, Ohio. Other "F" items pay motor carrier charges from fcty. in Fairbault, Minn. Allow extra time. No C.O.D.'s.

CRAFTSMAN® 6-cu. foot Wheelbarrow . . . the largest we sell



Hand Trucks move big loads

(6) 300-lb. capacity

SIZE: Stands 46 1/2 inches high, 14 inches wide. Nose is 8 inches deep.

CONSTRUCTION: Tubular steel frame. Stair riser slides. Enamel finish.

WHEELS: 8x1.75-inch. Ball bearings.

ORDERING INFORMATION:

See "N" suffix, page 82.

9 HT 87216N—Wt. 26 lbs. . . . \$29.50

(7) 500-lb. capacity

SIZE: Stands 50 inches high, 14 inches wide. Nose is 8 inches deep.

CONSTRUCTION: Tubular steel frame. Vertical handle with curved bar helps improve leverage. Stair riser slides. Wheel guards. Enamel finish.

WHEELS: 10x2.75-in. rubber tires.

ORDERING INFORMATION: See "N" suffix, page 82.

9 HT 87217N—Wt. 46 lbs. . . . \$42.99

(8) 400-lb. capacity with convertible handle. Use as upright truck or convert to 4-wheel cart for bulky loads.

SIZE: Stands 47 1/2 in. high, 14 in. deep. Nose is 8 inches deep.

CONSTRUCTION: 1 1/4 and 1-inch tubular steel frame. Stair riser slides. Wheel guards. Enamel finish.

WHEELS: Heavy-duty 3x3/4-in. swivel casters on handle. Two 8x1.75-in. rubber tires.

ORDERING INFORMATION: See "N" suffix, page 82.

9 HT 87218N—Wt. 38 lbs. . . . \$45.99

(9) 500-lb. capacity with nose plate. Plate holds 200-lb. load when down.

SIZE: Stands 50-in. high, 21 in. wide. Nose is 14 in. wide, 8 in. deep.

CONSTR.: 1-in. tubular steel frame. 24-in. steel nose plate extension folds down. Wheel guards. Enamel finish.

WHEELS: 10x2 3/4-in. semi-pneumatic. 5/8 diameter axle.

ORDERING INFO: See "T" note, page 34.

T9 HT 87262N—Wt. 52 lbs. . . . \$49.99

(10) 750-lb. capacity.

SIZE: 51-in. high, 19 1/2 in. wide. Nose is 17 1/2 in. wide, 14 1/2 in. deep.

CONSTR.: Heavy-gauge 1 1/4-in. arc welded tubular steel frame. Nose plate has beveled front edge. Wheel guards. Adjustable barrel hook attachment.

WHEELS: 6x2-in. rubber tires. 5/8 inch diameter axle.

ORDER INFO: "T" shipping note, page 34.

T9 HT 87263N—Wt. 46 lbs. . . . \$79.95

(11) 800-lb. capacity . . . our most rugged upright hand truck

SIZE: Stands 52 inches high, 22 inches wide. Nose is 6 1/2 inches deep.

CONSTRUCTION: Steel strapped hardwood frame. Straight crossbars. Wheel guards.

WHEELS: 8x2-inch rubber tires.

ORDERING INFORMATION: See Shipping Note below, left.

F9 HT 87212N—Wt. 60 lbs. . . . \$119.95

Truck Similar to (11) above except with curved crossbars for barrels, cylinders.

ORDER INFO: See Shpg. Note below, left.

F9 HT 87213N—Wt. 60 lbs. . . . \$119.95

(12) Universal Appliance Truck . . . 700-lb. capacity. Ideal for handling refrigerators, water heaters, gas cylinders.

SIZE: 60-in. high, 16 in. wide. Nose is 24-in. wide, 5 in. deep.

CONSTRUCTION: Tubular steel frame. Extruded rubber bumper on front plus felt-padded curved crossbars for complete protection. Appliance ratchet with web belt; belt-type stair climbers, for easy maneuvering. Enamel finish.


WHEELS: 6x2-inch rubber tires.

ORDERING INFO: "T" shipping note p. 34.

T9 HT 87261N—Wt. 56 lbs. . . . \$119.95



Auto Repair Tools can help simplify and speed repairs for the

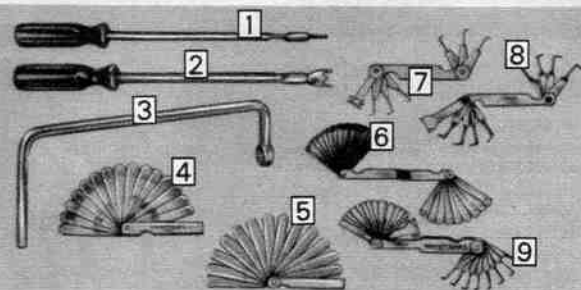

CRAFTSMAN® Tune-up Tools

(1) **Distributor Adjuster**
For Delco distributors. Flexible shaft.
9 HT 47723—Wt. 5 oz. ...\$3.47

(2) **Carburetor Adjuster**
For adjusting idle.
9 HT 47727—Wt. 5 oz. ...\$2.37

(3) **Distributor Wrenches**
Each with 12-point openings. Offset design permits easy access to mounting bolt. Steel alloy heat-treated, cadmium-plated. Japan.
Not Craftsman.

For Buick, Pontiac, Oldsmobile. 1/16-in. opening.
9 HT 47753—Wt. 12 oz. ...\$3.97

For Chrysler-built cars. IHC trucks with V-8 engines. 1/2-inch opening.
9 HT 47754—Wt. 15 oz. ...\$3.97

For Chev. 1/16-in. opening.
9 HT 47755—Wt. 11 oz. ...\$3.97

For Ford, Mercury. 1/2-inch opening.
9 HT 47756—Wt. 12 oz. ...\$3.97

(4) **Go-no-go Gauge**
15 blades: .006-.008 thru .020-.022 inch. Steel.
9 HT 40803—Wt. 5 oz. ...\$1.99

5-blade Ignition Gauge
For Chrysler products. Blade sizes .004 to .012 inch. Nonmagnetic. Brass.
Not shown.
9 HT 40809—Wt. 3 oz.79c

25-leaf Feeler Gauge
Leaves 3/16 in. long, sizes .0015 to .035 in. Steel.
Not shown.
Shpg. wt. 6 oz.
9 HT 40804\$2.29


(5) **13-blade Metric Ga.**
For imported cars and motorcycles. Sizes .05mm to .10mm plus 1.00mm. Steel.
Shpg. wt. 5 oz.
9 HT 40807\$2.19

(6) **Offset Gauge**
26 leaves .005 to .030 in., each 3/16 in. long; 1-in. offset allows adjustment of "V" engine tappets. Measures 4 inches long. Steel.
Shpg. wt. 8 oz.
9 HT 40802\$3.29

(7) **6-wire High-energy Spark Plug Gap Gauge.**
For all transistorized ignition systems. Reads in standard and metric. Steel.
Shpg. wt. 4 oz.
9 HT 40808\$1.29

(8) **8-wire Spark-Plug Gap Gauge.** Sizes marked in standard scale. Steel.
Not Craftsman.
Shpg. wt. 4 oz.
9 HT 407569c

(9) **Ignition Gauge**
14 leaves .012-.032 in.: 8 wires .022-.040 in. Steel.
Shpg. wt. 4 oz.
9 HT 40801\$2.29

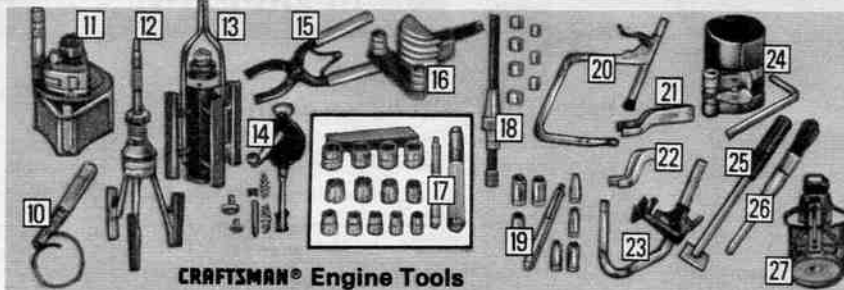

CRAFTSMAN® Engine Tools

(10) **Oil Filter Wrench.** For standard size oil filters. Swivel handle to avoid obstructions.
Not Craftsman.

9 HT 47608—Shipping wt. 1 lb.\$3.97

(11) **Lathe-type Ridge Reamer.** Tool steel cutter. For all 3 to 4 1/2-in. diameter cylinders and short stroke motors with piston in place.
9 HT 4713—Shpg. wt. 1 lb. 14 oz.\$20.97

(12) **Glaze Breaker.** Range of 2 to 7 inches. Operates with 1/4 to 3/8-inch electric drill.
9 HT 4633—Shpg. wt. 1 lb. 14 oz.\$16.97

Replacement Stones for (12). Package of 3.
9 HT 46331—Shipping wt. 5 oz.Pkg. \$5.97

(13) **Cylinder Hone.** Range 2 1/16 to 4 1/2 in. Two 5-in. stones. Universal joint action. Shank and extension fit 1/2-in. drill, drill press.
9 HT 4682—Shipping wt. 11 lbs.\$82.88

Extra Replacement Stones for (13). Sets incl. 2 stones, 2 pads.
9 HT 4687—Medium, 180 Grit. Wt. 11 oz.Set \$8.97

9 HT 4686—Coarse, 80 Grit. Wt. 11 oz.Set 8.97

(14) **Valve Grinder.** Reciprocating, progressive action. Long, short stems, 2 suction cups, 2 adapters. For auto, small engine valves.
9 HT 47042—Shipping wt. 1 lb. 12 oz.\$5.77

(15) **Piston Ring Expander.** 1/4 to 1/2-in. rings.
9 HT 4682—Shpg. wt. 7 oz.\$3.27

(16) **Tubing Bender.** For bending 3/16, 1/4, 3/8, 1/2-in. tubing. Not for 3/4-in. steel tubing.
Not Craftsman.

9 HT 47805—Shipping wt. 1 lb. 2 oz.\$7.47

(17) **15-pc. Bushing Driver Set.** With 13 collars (1/16 to 1 1/8-in. inside diameter, 3/8 to 1 1/4-in. outside diameter). 2 driving handles. Plastic box.
Not Craftsman.

9 HT 4707—Shpg. wt. 4 lbs. 4 oz.Set \$26.97

(18) **Clutch Aligning Set.** 8 diam.: .590, .612, .624, .668, .749, .786, .808, .984-in.; 9 in. long.
Not Craftsman.

9 HT 4728—Shipping wt. 1 lb. 12 oz.Set \$8.97

(19) **8-piece Gasket Punch Set.** Cuts holes in gaskets and rubber hose. Not for metal. Includes sizes 1/4, 5/16, 3/8, 7/16, 1/2, 5/8, 3/4-in.
9 HT 3635—Shipping wt. 15 oz.Set \$15.97

(20) **Valve Spring Compressor.** 9x11-inch steel frame, 10 1/2-inch opening. No. 1 spring steel jaws ... fit 90% of all spring sizes.
9 HT 4695—Shipping wt. 6 lbs. 2 oz.\$9.87

(21) **No. 2 Jaws.** For GMC, Continental engines. Fits compressor (20) above.
9 HT 4697—Shipping weight 6 oz.Pair \$1.27

(22) **No. 5 Jaws.** For Plymouth, Dodge, Chrysler. Fits compressor (20) above.
9 HT 4699—Shipping weight 6 oz.Pair \$1.77

(23) **Piston Groove Cutter and Cleaner.** 5 point sizes for grooving, one for trimming, cleaning. Fits over piston up to 5 in. in diameter.
9 HT 4722—Shipping wt. 1 lb. 2 oz.\$7.97

(24) **Ratchet-type Ring Compressor.** For auto or light truck piston rings. Range 2 1/8 to 5 inches. Tension bands compress ring uniformly; 3 1/2 inches deep, holds up to 4 rings at a time. With wrench.
9 HT 4716—Shipping weight 14 oz.\$2.99

(25) **Gasket Scraper.** Three blades measure 1, 1 1/2, and 2 inches wide.
9 HT 47725—Shipping weight 9 oz.\$3.67

Replacement Blades for (25). Package of 6.
9 HT 47729—Shipping weight 6 oz.Pkg. 47c


(26) **Parts Cleaning Brush.** Sturdy aluminum handle, tough polypropylene bristles.
Not Craftsman.

9 HT 47602—Shipping weight 6 oz.\$2.87

(27) **Ridge Reamer.** Wide range 2 3/8 to 4 1/8 in. scraper action with floating carbide cutter.
9 HT 4723—Shpg. wt. 2 lbs. 9 oz.\$12.97

Replacement Cutter for (27)
9 HT 4724—Shipping weight 6 oz.\$2.87

See Warranty on page 49

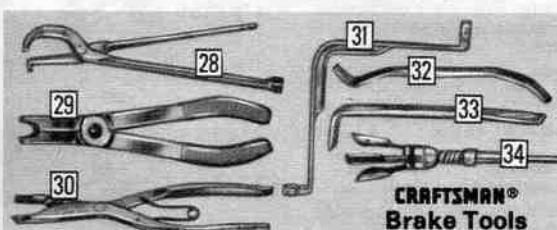

CRAFTSMAN® Brake Tools

(28) **Brake Spring Pliers**
Chrome-plated alloy steel, 1 1/2 in. long.
Wt. 1 lb. 3 oz.
9 HT 47395\$5.97

(29) **Spring Washer Pliers.** Steel construction.
Not Craftsman.
9 HT 47721—Wt. 8 oz. ...\$3.37

(30) **Lock-ring Pliers**
Opens 1 1/2 in. Chrome-plated forged steel, 8 1/2 in. long.
9 HT 4735—Wt. 10 oz. ...\$3.97


(31) **Brake Bleeder Wrench.** 3/16, 3/8-inch hex ends. For GM since 55; 1965 Lincoln, Thunderbird. Chrome-plated alloy steel.
Not Craftsman.
9 HT 47603—Wt. 5 oz. ...\$3.67

(32) **Brake Adjusting Tool.** Chrome-plated, drop-forged alloy steel, 1 1/2-in. blade. Overall measures 3/8 in. wide, 9 1/4 in. long.
Shpg. wt. 9 oz.
9 HT 4740\$1.69

(33) **Chevrolet Brake Adjusting Tool.** For Bendix brakes. Made of steel.
Shpg. wt. 7 oz.
9 HT 4736\$1.49

(34) **Brake Cylinder Hone.** Three stones hone and polish brake cylinder. Range of 1/8 to 2 inches. Controlled pressure. Flexible shaft. For 1/4-inch drill.
Shpg. wt. 6 oz.
9 HT 4656\$9.47

Replacement Stones for (34). Package of 3.
Shpg. wt. 3 oz.
9 HT 4657Pkg. \$2.67

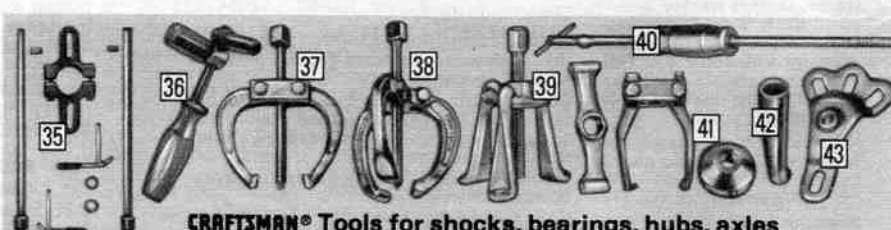

CRAFTSMAN® Tools for shocks, bearings, hubs, axles

(35) **MacPherson Strut Spring Compressor.** For removing shock absorbers with MacPherson struts. Not Craftsman.
9 HT 47601—Shpg. wt. 12 lbs. 3 oz.\$59.50

(36) **Universal Shock Absorber Tool.** Steel.
Not Craftsman.
9 HT 47604—Shipping weight 14 oz.\$7.97

(37) **Two-jaw Puller.** Forged high-carbon steel jaws. Fine-pitch screw thread.
SIZES AND ORDERING INFORMATION:

Catalog No.	Jaw Spread	Reach	Shpg. wt.	Price
9 HT 46941	0 to 3 in.	2 1/4 in.	12 oz.	\$8.97
9 HT 46901	0 to 5 1/2 in.	3 3/4 in.	1 lb. 12 oz.	11.47
9 HT 46911	0 to 8 in.	5 1/2 in.	3 lbs. 2 oz.	18.97
9 HT 4692	0 to 10 in.	8 1/2 in.	8 lbs. 12 oz.	35.97

(38) **Three-jaw Puller.** As above but with 3 jaws for more balance; 0-5 1/2-in. spread, 3 3/4-in. reach.
9 HT 46902—Shpg. wt. 2 lbs. 2 oz.\$17.97

(39) **Hub Puller and Striking Wrench Set.** 3 adjustable arms; use any wheel studs. For 7 1/2-in. bolt circles. Forged high-carbon steel.
9 HT 46642—Shpg. wt. 9 lbs. 12 oz.Set \$33.97

(40) **Slide Hammer.**
Use with accessories below. Heat-treated alloy steel. 24 inches long.
9 HT 4696—Shipping wt. 5 lbs. 6 oz.\$10.97


(41) **Two-jaw Reversible Puller.** Fits (40). Pulls bearings and retainers. Jaws pull inside or outside. With a capacity of 1 1/2 to 4 1/2 inches outside, 1 1/4 to 3 3/8 inches inside.
9 HT 46961—Shipping wt. 1 lb. 8 oz.\$13.47

Conversion Kit.
Converts two-jaw puller (41) to 3-jaw puller. Capacity outside 1 1/2 to 4 1/2 inches, inside 1 1/8 to 4 3/4 inches.
9 HT 46962—Shipping weight 10 oz.Kit \$8.47

(42) **Seal Hook.**
Fits (40). Pulls seals, bearings.
9 HT 46964—Shipping wt. 4 oz.\$5.27

(43) **Axle Puller.**
Fits (40). For flange-type rear axles with up to 1 1/8-inch studs and 4, 5 or 6 bolt circle up to 5 1/16-inch diameter.
9 HT 46963—Shipping wt. 1 lb. 12 oz.\$10.47


home mechanic or professional

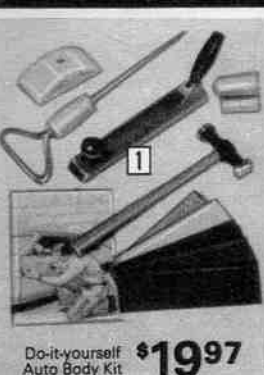

Do-it-yourself Auto Body Kit **\$19.97**




- CRAFTSMAN® Body and Fender Tools**
- (1) **Do-it-yourself Auto Body Repair Tool, Finishing Kit**
INCLUDES: Dent puller, finishing hammer, dolly, file, sanding block, 10 assorted sandpaper re-fills and instructions.
Not Craftsman.
Shipping weight 9 lbs. 2 oz.
9 HT 4171.....Kit \$19.97
- 9-piece Auto Body Repair Set**
INCLUDES: (2) thru (10) below.
Save \$3.85. Sep. prices total \$68.73.
Shipping weight 19 lbs.
9 HT 4583C.....Set \$64.88
- 10-piece Auto Body Repair Set**
INCLUDES: (2) thru (10) below plus tool box (9 HT 6512) p. 71.
Save \$5.10. Sep. total \$84.98.
9 HT 45882C—Wt. 29 lbs. Set \$79.88
- (2 thru 6)
Drop-forged heads. Fiber glass handles. 12 inches long.
- (2) **Bumping Hammer.** For panel work. With 5/8-inch head; 1 1/2-inch square face, 1 3/8-inch round face.
9 HT 45511—Wt. 1 lb. 6 oz. ...\$6.97
- (3) **Light Bumping Hammer.** With 3/8-inch head; 7/8-inch square face, 1 1/8-inch round face.
9 HT 45501—Wt. 1 lb.\$6.97
- (4) **Blunt Pick Hammer.** 5 3/8-in. head; 1 1/2-in. round face, 2 1/2-in. pick.
9 HT 45531—Wt. 1 lb. 3 oz. ...\$6.97
- (5) **Pointed Pick Hammer.** With 5 3/8-inch head; 1 1/2-inch round face, 2 1/2-inch pick.
9 HT 45561—Wt. 1 lb. 3 oz. ...\$6.97
- See Warranty on page 49
- (6) **Cross-pein Hammer.** With 5 3/8-inch head; 1 1/2-inch round face, 2 1/2x3/4-inch cross-pein.
9 HT 45521—Wt. 1 lb. 4 oz.\$6.97
- (7) **Heel Dolly.** Drop-forged steel.
9 HT 45621—Wt. 2 lbs. 11 oz.\$7.97
- (8) **Universal Dolly.** Two beading surfaces. Drop-forged steel.
9 HT 45611—Wt. 3 lbs. 6 oz.\$8.47
- (9) **All-purpose Dolly.** 8 molding, beading surfaces. Bottom for panel, fender-skirt work. Drop-forged steel.
9 HT 45651—Wt. 3 lbs. 2 oz.\$8.97
- (10) **Combination Dolly and Spoon.** For working on roof rails, behind door, body posts. Drop-forged steel.
9 HT 45631—Wt. 3 lbs. 9 oz.\$8.47
- (11) **Metal Mend.** Plastic compound body filler. No heat required. Not Craftsman.
32 oz. in can. Wt. 2 lbs. 7 oz.
9 HT 45742.....Can \$3.99
- (12) **Kromed® 14-inch Auto Body File.** Curved teeth cut fast into metal and fillers. Not Craftsman.
9 HT 3114—Wt. 14 oz.\$7.90
- (13) **Adjustable File Holder with File.** For concave, convex and straight filing. Holder has cast aluminum frame. With 14-in. Kromed® file (12) described above. Not Craftsman.
9 HT 31134—Wt. 2 lbs. 4 oz.\$15.90
- (14) **Dent Puller.** Metal handle grip. Contour slide handle grip. 14 in. long.
Not Craftsman.
9 HT 45701—Wt. 2 lbs. 2 oz.\$7.79

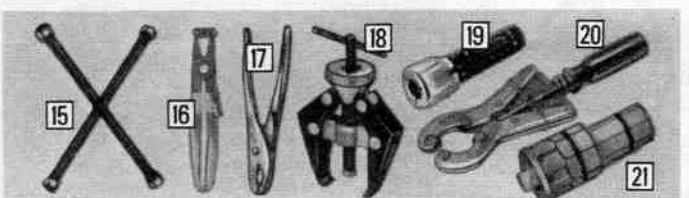

- Tire, Battery, Hose, Tailpipe Tools**
- (15) **Cross-rim Wrench** with 16 1/4-in. arms. Chrome-plated steel. Openings of 3/4, 1 1/8, 1 3/8 in., 19mm.
9 HT 44888—Wt. 3 lbs. 2 oz. ...\$6.27
- Wrench with 22 1/2-in. arms.** As above. Openings: 3/4, 1 1/8, 1 3/8, 1 7/8 in.
9 HT 44889—Wt. 4 lbs. 10 oz. ...\$7.27
- (16) **Swivel Jaw Hose Clamp Pliers** with Ratchet. 8 1/2 inches in length.
9 HT 4770—Wt. 11 oz.\$4.27
- (17) **Hose Clamp Pliers**
9 HT 45391—Wt. 13 oz.\$3.97
- (18) **Terminal Clamp Lifter**
9 HT 47147—Wt. 15 oz.\$6.47
- (19) **Terminal Clamp/Battery Post Cleaner.** Stainless steel spring cutters resist corrosion.
9 HT 47633—Wt. 7 oz.\$2.97
- (20) **Muffler Tailpipe Cut-off Tool**
Four cutting wheels cut quick, clean. 1 3/4 to 2 1/2-inch range. Not Craftsman.
9 HT 47607—Wt. 1 lb. 10 oz.\$9.97
- Set of 4 Replacement Cutter Wheels** for (20) above. Not Craftsman.
9 HT 47611—Wt. 4 oz.Set \$3.57
- (21) **Tailpipe Expander.** 1 1/2 to 2 1/2-in. range. For use with impact wrench.
Not Craftsman.
Shipping weight 2 lbs. 14 oz.
9 HT 47608.....\$9.97

CRAFTSMAN® steel alloy Punches, Chisels, Line-up Tools

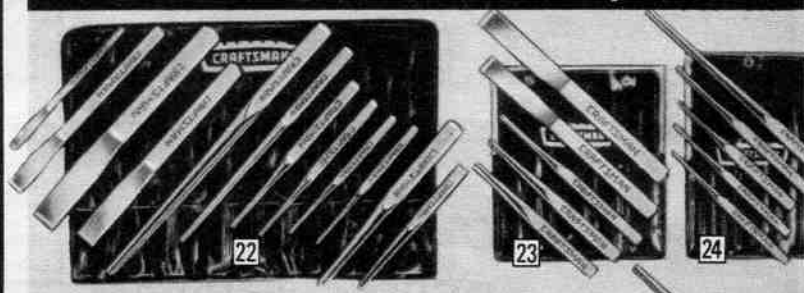


- CONST.: Items (22 thru 33) of chrome vanadium steel double heat-treated for maximum durability on cutting edge, maximum impact resistance on striking end. Nickel-chrome plated. Punches precision ground. Square shape for easy gripping, helps prevent rolling off workbench. Sets (22 thru 26) have plastic pouch.
- (22) **12-pc. Punch, Line-up and Chisel Set**
SET INCLUDES: 6 punches: 3/32, 1/8, 3/16, 1/4-in. pin; 3/8-in. center; 1/2-in. prick. 2 line-up tools: 3/32x7 and 1/8x9-in. 4 cold chisels: 1/4, 1/2, 3/8, 1/2-in. Shipping weight 2 lbs. 4 oz.
9 HT 43031.....Set \$16.99
- (23) **5-pc. Chisel, Punch Set**
SET INCLUDES: 2 cold chisels: 1/2, 3/4-in. 3 punches: 3/8-in. center, 3/32, 1/4-in. pin. Shipping weight 1 lb. 9 oz.
9 HT 4302.....Set \$7.99
- (24) **5-pc. Punch, Line-up Set**
SET INCLUDES: Four pin punches: 1/8, 3/32, 1/4, 3/8-in. One line-up tool: 3/32-in. 9 HT 4285—Wt. 12 oz. Set \$7.49
- (25) **4-pc. Pin Punch Set**
SET INCLUDES: Sizes 1/8, 3/32, 1/4, 3/8-in. 9 HT 4311—Wt. 1 lb. ...Set \$5.69
- (26) **3-pc. Cold Chisel Set**
SET INCLUDES: Sizes 1/4, 3/8 and 1/2-in. Shipping weight 10 ounces.
9 HT 4309.....Set \$4.49
- SAFETY NOTE:** Protect your eyes... wear safety glasses sold on p. 75 when using punches, chisels
- See Warranty on page 49
- (27) **Rolling Wedge Bar.** With a 90° polished rolling head... gives good leverage. Pointed end for lining up work. 16 in. long with a 1/8-in. diam. Shpg. wt. 1 lb. 7 oz.
9 HT 42892.....\$6.89
- (28) **Extra-long Cold Chisels.** Cuts bolts and rivets. Meets Federal Specifications GGG-P-831b for strength.
3/4x12 inches. Wt. 13 oz.
9 HT 42991.....\$3.19
- 3/4x18 inches
Shpg. wt. 1 lb. 4 oz.
9 HT 42992.....\$4.29
- 3/4x12 inches
Shpg. wt. 1 lb. 4 oz.
9 HT 42993.....\$4.29
- (29) **Center Punches**
Mark points for drill holes. Meets Federal Specifications GGG-P-831e for strength.
3/4x4 1/2 in. Wt. 3 oz.
9 HT 42861.....\$1.39
- 1/2x6 in. Wt. 6 oz.
9 HT 42862.....\$1.79
- (30) **Pin Punches.** Drive out pins, bolts. Meet Fed. Specs. GGG-P-831e.
- | Catalog Number | Point size | Length | Wt. oz. | Each |
|----------------|------------|-----------|---------|--------|
| 9 HT 42881 | 1/16 in. | 4 1/4 in. | 4 | \$1.49 |
| 9 HT 42882 | 3/32 in. | 4 1/4 in. | 4 | 1.59 |
| 9 HT 42883 | 1/8 in. | 4 1/4 in. | 3 | 1.59 |
| 9 HT 42884 | 3/16 in. | 5 in. | 4 | 1.69 |
| 9 HT 42885 | 1/4 in. | 5 3/8 in. | 5 | 1.69 |
| 9 HT 42886 | 3/8 in. | 5 3/8 in. | 6 | 1.79 |
- (31) **Line-up Tools.** Hardened ends. Meet Federal Specifications GGG-P-831e. Not for impact use.
- | Catalog No. | Size (in.) | Shpg. wt. | Each |
|-------------|-----------------|-------------|--------|
| 9 HT 42901 | 3/32x3/8x7 | 6 oz. | \$1.99 |
| 9 HT 42902 | 1/8x1/2x9 | 8 oz. | 2.49 |
| 9 HT 42903 | 3/16x3/4x12 1/2 | 1 lb. 4 oz. | 3.29 |
| 9 HT 42904 | 1/4x1x9 1/2 | 1 lb. | 2.99 |
- (32) **Std.-length Cold Chisels**
Meet or exceed Federal Specifications GGG-P-831b for strength.
- | Catalog Number | Edge (in.) | Stock (in.) | Length (in.) | Wt. oz. | Each |
|----------------|------------|-------------|--------------|---------|--------|
| 9 HT 42971 | 1/4 | 3/16 | 43 1/2 | 4 | \$1.49 |
| 9 HT 42972 | 3/8 | 1/2 | 51 1/2 | 4 | 1.69 |
| 9 HT 42973 | 1/2 | 3/4 | 61 1/2 | 6 | 1.89 |
| 9 HT 42974 | 3/4 | 1 | 71 1/2 | 8 | 2.09 |
| 9 HT 42975 | 1 | 1 1/4 | 81 1/2 | 12 | 2.49 |
| 9 HT 42976 | 1 1/4 | 1 3/4 | 91 1/2 | 16 | 3.19 |
- *Shipping weight 1 lb.
- (33) **Pry Bar.** 1/2x16 in. long.
9 HT 4283—Wt. 1 lb. 1 oz.\$3.49

- (34) **CRAFTSMAN Hand Impact Driver.** Loosen or tighten frozen nuts, screws, bolts. No electric or air power needed... just strike driver with hammer (not incl.). Each impact turns bit up to 20°. Can also be used with any 1/2-inch square drive regular or deep impact socket.
- INCLUDES: 1/2-inch square drive tool with adapter, numbers 2 and 4 Phillips bits, 1/2, 3/8-inch straight-slotted bits, plastic storage pouch.
9 HT 47634—Shipping weight 2 pounds 1 ounce.....Set \$13.97
- Replacement Bits for hand impact driver above**
- 9 HT 47631—No. 1 Phillips Bit—Shpg. wt. 3 oz.87c
- 9 HT 47635—No. 2 Phillips Bit—Shpg. wt. 3 oz.87c
- 9 HT 47632—No. 3 Phillips Bit—Shpg. wt. 3 oz.87c
- 9 HT 47636—No. 4 Phillips Bit—Shpg. wt. 3 oz.87c
- 9 HT 47637—3/8-in. Straight-slotted Bit—Wt. 3 oz.99c
- 9 HT 47638—1/2-in. Straight-slotted Bit—Wt. 3 oz.\$2.39
- (35) **CRAFTSMAN Universal Nut Cracker.** Splits nuts up to 1 1/2-inch across flats without damage to threads. 4 1/2-inch, forged alloy steel frame; hardened cutter.
9 HT 4772—Shipping weight 15 ounces\$9.97
- 9 HT 4773—Replacement Cutter. Shipping wt. 3 oz.2.47
- See Warranty on page 49



Portable Hydraulic Power Sets ... 4 or 10-ton capacity

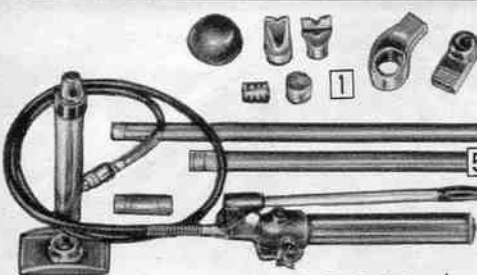

4-ton Set **\$169⁹⁹**

Make quick work of bent automobile frames and heavy lifting jobs.

SET COMPOSITION: Hydraulic power unit; 3, 5, 10, 18 and 23-inch extension tubes; wedge head; 90° V-base; serrated saddle; ram toe; 2 3/4-inch flex head; male connector; base spread toe; 3 couplings.

ORDERING INFORMATION: 4 and 10-ton unit accessories not interchangeable. From Columbus, Wisc. factory. See Shpg. Note right.

4-ton Set ... as shown. With 5-in. stroke; 14 3/4-in. extended height, 9 3/4-in. collapsed.

F28 HT 1280—Wt. 25 lbs. Set **\$169.99**

10-ton Set ... as shown. With 6-in. stroke; 17 3/4-in. extended height, 11 3/4-in. collapsed.

F28 HT 1290—Wt. 64 lbs. Set **\$239.99**

(1) Hydraulic Unit only

ORDERING INFORMATION:

F28 HT 1281—4-ton. Wt. 11 lbs. **\$119.99**

F28 HT 1291—10-ton. Wt. 30 lbs. **\$159.99**

Spreader Ram Attachment for unit above

Lifts heavy objects; spreads crushed objects. 1-ton cap. Stroke 3 3/8 in., extended height 3 3/4 in., collapsed height 3/8 in. at tips. Return spring.

ORDERING INFORMATION: Shipped from Columbus, Wisc. factory. See Shipping Note at right.

F28 HT 1286—4-ton. Shipping weight 4 pounds **\$46.99**

F28 HT 1296—10-ton. Shipping weight 5 pounds **\$47.99**

10-ton Set **\$239⁹⁹**

(2) Coupling

ORDERING INFORMATION: One only.

For 4-ton Extension Tubes.

F28 HT 1282—Shpg. wt. 6 oz. Ea. **\$2.69**

For 10-ton Extension Tubes.

F28 HT 1292—Shpg. wt. 12 oz. Ea. **\$2.49**

(3) 5-inch Heavy-duty Extension Tube

ORDERING INFORMATION:

F28 HT 1283—For 4-ton. Wt. 10 oz. ... **\$2.99**

F28 HT 1293—For 10-ton. Wt. 2 lbs. ... **\$5.49**

(4) 10-inch Heavy-duty Extension Tube

ORDERING INFORMATION:

F28 HT 1284—For 4-ton. Wt. 2 lbs. ... **\$3.89**


F28 HT 1294—For 10-ton. Wt. 4 lbs. ... **\$7.49**

(5) 18-inch Heavy-duty Extension Tube

ORDERING INFORMATION:

F28 HT 1285—For 4-ton. Wt. 3 lbs. ... **\$4.89**

F28 HT 1295—For 10-ton. Wt. 4 lbs. ... **\$9.99**




1 1/2-10-ton Hydraulic Press **\$134⁹⁹**

Use for removing and installing bearings, U-joints, gears, bushings, ball joints, pulleys, etc. 52 in. high (excluding jack).

ORDERING INFORMATION: Use with up to 10-ton hydraulic jack. See accessories sold below. Pay motor carrier charges from Milwaukee, Wisc. factory. Allow extra time. No C.O.D.'s. Shipping weight 140 lbs.

F28 HT 12001N **\$134.99**

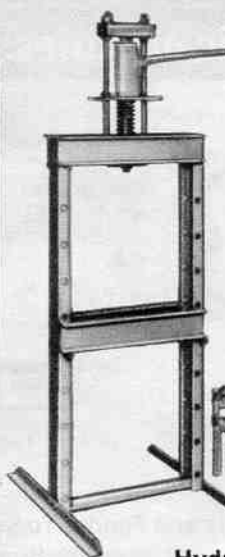

Hydraulic Press Accessories

For faster completion of work without damage to parts. Do more types of work without special rigging.

ORDERING INFORMATION: Sent from Milwaukee, Wisconsin factory. See Shipping Note below.


Item	Description	Catalog Number	Wt. lbs.	Price
(6)	Small Bearing Puller	F28 HT 12003	6	\$31.99
(7)	Medium Bearing Puller	F28 HT 12006	13	49.99
(8)	Large Bearing Puller	F28 HT 12005	20	94.99
(9)	Safety Shield	F28 HT 12004	2	4.99
(10)	Small V-blocks (pair)	F28 HT 12008	9	14.99
(11)	Arbor Plates (pair)	F28 HT 12009	19	15.99
(12)	Large V-blocks (pair)	F28 HT 12007	46	29.99

SHIPPING NOTE: "F" items (as F28 HT 12007) shipped from factory indicated. Pay shipping and handling charges from nearest Sears Merchandise Distribution Center. Allow extra delivery time. No C.O.D.'s please.

**Sears Has a Credit Plan
to Suit Most Every Need**

See Big Book or ask for details

Auto Creeper and Seat Creeper

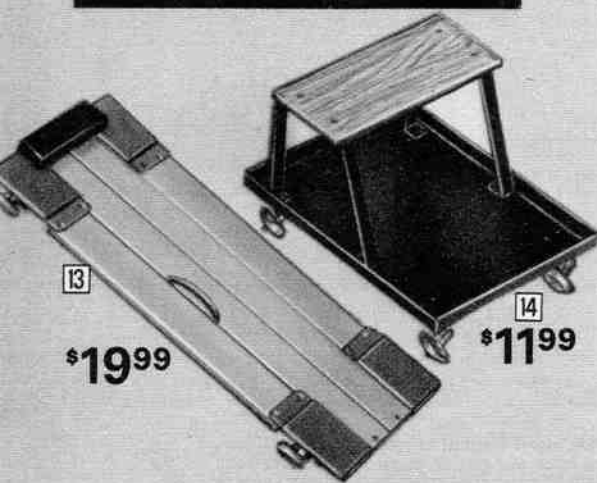

\$19⁹⁹

\$11⁹⁹

(13) Auto Creeper. Allows easy movement under car.

CONSTRUCTION: Built with 3/4-inch thick wood bed. Metal-braced corners. Foam-rubber filled headrest, vinyl covering, 3 1/4-in. diameter steel wheels, ball bearings on brackets and wheels. Hand hole cut-out.

ORDERING INFORMATION: 36x15 1/4 in. wide. Shpg. wt. 16 lbs.

28 HT 12706C **\$19.99**


(14) Seat Creeper

CONSTRUCTION: Steel and plywood construction. 2 1/2-in. diameter steel casters and 1 1/2-in. mounting plates. Seat is 6x14 in. wide. Tray is 18x14 in. wide. Overall measurement, 17 3/4x13 3/4x11 3/4 in. high.

ORDERING INFORMATION: Shipping weight 8 lbs. 8 oz.

28 HT 12601 **\$11.99**

Lubricating Equipment and Accessories

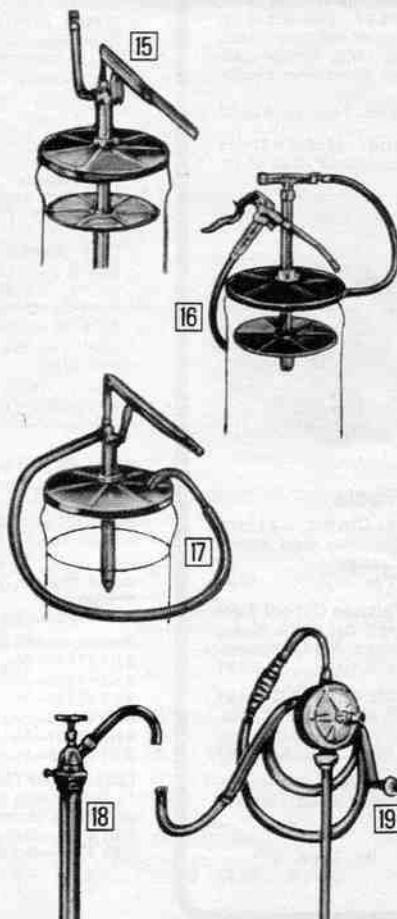

(15) Gun-filling Dispenser. For all filler-plug guns. Follows plate for heavy-duty greases. Fits 25 to 40-lb. pails with straight walls, 1 1/4 to 1 1/2-in. diameter tops. 1/4-in. adapter.

ORDERING INFORMATION: Shpg. wt. 8 lbs.

28 HT 4998 **\$12.99**

(16) Chassis Lubricator

One-hand operation gun delivers grease up to 12,000 lbs. per sq. in. Lightweight for ease of handling. Swivel mount with 10-foot hose. For 25 to 50 lb. pails with straight walls.

ORDERING INFORMATION: Shpg. wt. 14 lbs.

28 HT 4997C **\$34.99**

(17) Filling, Transferring Dispenser. For transmission, differential, heavier oils. Fits 25, 40-lb. containers with removable tops. 4-ft. heavy-duty oil resistant hose; bent nozzle to fit all openings. Pressed steel top.

ORDERING INFORMATION: Shipping weight 7 lbs. 8 oz.

28 HT 4596 **\$11.99**

(18) Lift-type Suction Pump

Draws 1 1/2 pints per 36-inch stroke, 1 1/2-inch diameter steel tubing cylinder, 42 inches long. Steel valve, 3/4-inch garden-hose coupling ... use with 3/4-inch spout (included) or garden hose (not incl.). Suction pipe fits 15, 30, 55-gallon drums. Bung bushing fits 2-inch opening.

ORDERING INFORMATION: Shipping weight 7 pounds.

28 HT 4549C **\$8.99**

(19) Rotary Hand Oil Pump

Pumps gas, light oils and liquids. Fits 55-gallon drum. Cast-iron pump parts, carbon sliding vanes. Includes 8-foot rubber hose, 3/4-inch flexible coupling, ferruled nozzle, 3/4-inch steel tubing spout; 42-inches long, 3/4-inch diameter suction pipe. Bung bushing fits 2-inch opening.

ORDERING INFORMATION: Shipping weight 22 pounds.

28 HT 4639L2 **\$49.99**

Sears/PENSKE Professional-type Testing Equipment



Inductive pickup clamp attaches directly to spark plug wire . . . senses impulse through spark plug wire. No need to take off spark plug wire boot.

PENSKE Diagnostic Oscilloscope
Now with inductive pickup clamp for simplified hook-up
\$569⁹⁹

Scope projects ignition system operation . . . pinpoints trouble spots. Lets you superimpose patterns of all cylinders atop each other to check dwell variations.

Parades patterns of all cylinders across screen to allow the detection of faulty spark plugs and wires by comparison.

In its visual display of the engine ignition system, unit tests spark plug voltage underload, dynamic point resistance, condenser action, secondary resistance and insulation leakage, distributor cap, dwell variation.

SCOPE: 9-in. diagonally measured cathode ray tube; Plexiglas® plastic screen graduated for 4, 6, 8-cyl. dwell and 25 KV and 50KV spark outputs. Automatic sharp focus and high brightness.

SCALES: Coil output, insulation and polarity—0/50KV; spark voltage, coil condenser, points, secondary resistance 0/25KV; distributor cam lobe accuracy in degrees of dwell. 4-position function switch. Power light.

CIRCUITRY, ELEC. INFO: Solid-state. Powered by car's 12-v. battery. Push on-off switch. Horizontal pattern length; horiz. and vert. position control.

HOUSING: Metal case; hi-impact plastic front. 9½x12½x16 in. deep. ACCESS: Inductive pickup clamp; clamp-on standard and H.E.I. pattern pickup; adapter for alternator testing; pickup coil test lead. Two 10-ft. test leads; high voltage pliers. Fully detailed and illus. instr. manual incl.

ORDERING INFO: For 12-volt only. Performs tests on both conventional and breakerless ignition systems, conventional 4, 6 and 8-cylinder engines and rotary engines. *Warranted 1 year, see Warranty at right.*

28 HT 21055C—Shipping weight 26 pounds **\$569.99**



PENSKE Chrome-plated Timing Light with shock-mounted inductive pickup

Accurate to 8000 rpm

\$479⁹⁹ with rugged plastic case

Allows you to check the timing, centrifugal advance and vacuum advance action.

CIRCUITRY: Bright Xenon flash tube for daytime use. Solid state. Reverse polarity protection. Trigger switch to flash the light only when needed.

ELECTRICAL INFORMATION: Powered by your car's 12-volt battery.

HOUSING: Cast metal housing with chrome-plated finish and protective rubber nose cone. Strain-relief boot for lead protection when extended. 6¼x1¼x11 in. long.

ACCESS: Heavy-duty, shock-mounted inductive pickup; no adapters needed. Attach to your car's battery and number one spark plug wire. Battery clip opens 1¼ in. 5½-ft. long color-coded leads. Custom fit plastic case with handle.

ORDERING INFORMATION: For 12-volt only. Tests 12-volt conventional, magneto, electronic and breakerless ignition systems in 4, 6 or 8-cylinder or rotary engines. Operating instructions included. *Warranted 1 year, see Warranty below.*

28 HT 21381—Shipping weight 2 pounds 12 ounces **\$47.99**

Timing Light without case. Same as shown above.

28 HT 2138—Shipping weight 2 pounds 12 ounces **\$43.99**

FULL WARRANTY ON AUTOMOTIVE TEST INSTRUMENTS FOR TIME SPECIFIED. If within the duration of time specified from date of purchase, the automotive test instrument fails due to defect in material or workmanship, return it to the nearest Sears Store throughout the United States, and Sears will repair or replace it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.



(1) Service-station-type Hydraulic Floor Jack

CONSTRUCTION: All-steel with elongated chassis to handle large lifting loads. All-steel front and rear casters for heavy-duty use. Handle-mounted release control. Automatic overload-protection valve also helps prevent over-extension of jack piston. 30-inch "T" handle allows easy maneuvering. Handle removes for compact storage, rubber grip 13½x7½x56 in. long. From Japan.

LOAD CAPACITY: Designed to handle 3 tons. Capable of lifting one end or one side of car or light truck.

LIFTING RANGE: From 5 to 24 inches.

SADDLE: Swivel-type, 6-inch diameter. Safety lips around saddle edges help hold load in place.

ORDERING INFORMATION: Shpg. wt. 167 lbs.

28 HT 1201N **\$299.99**

(2) 1½-ton Hydraulic Jack with lift saddles

CONSTRUCTION: All-steel. Two 5x4½-inch rubber-covered saddles with 15-inch reach. Overload valve. 7-inch rubber-tired wheels. Saddle spread is adjustable from 17½ to 52 inches.

LOAD CAPACITY: 1½ tons.

LIFTING RANGE: 9½ to 32½ inches high.

ORDERING INFORMATION: For most cars (except 68 Corvair, Cougar, Pontiac, Toronado; 1969 Corvair; front of 69 Mustang, Riviera, 72 Javelin, AMX; rear of Eldorado, Dodge, Polara and Vega). Pay motor carrier charges from Milwaukee, WI. factory. Allow extra time. No C.O.D.

F28 HT 1254N—Shpg. wt. 151 lbs. **\$219.99**



Hand-held Dwell Tachometer

With 3 scaled meter **\$299⁹⁹**

Check rpm settings for carburetor adjustments, point resistance and dwell angle.

METER: 3-inch D'Arsonval meter with knife-edge pointer. Glass lens.

SCALES: 8-cylinder: 0-2250 rpm, 0-45° dwell; 6-cyl.: 0-3000 rpm, 0-60° dwell, good/bad band for points. Double 8-cyl. readings for 4 cyl. cars.

CIRCUITRY: Solid state. ELECT. INFO: Powered by your car's 12-v. battery.

HOUSING: Black ABS plastic housing measures 6x4½x2½ inches deep.

ACCESSORIES: 5½-ft. leads with color-coded plastic boots on terminal clips. Ford coil adapter.

ORDERING INFO: For 12-volt only. For 4, 6 and 8-cylinder cars with 12-volt conventional, electronic or magneto ignitions. Instructions included.

Shpg. wt. 1 lb. 3 oz.

28 HT 2198 **\$29.99**

MANUAL HOISTS

(3) ½, 1 and 2-ton Gear drive Chain Hoists \$999⁰⁰ ½-ton capacity

CONSTRUCTION: Worm gear drive mechanism with bronze and ball thrust bearings for long life. Non-slip drive plus adjustable safety brake helps keep maximum rated loads from slipping. Aluminum alloy cast housing, steel chain, forged steel swivel hooks, safety latch, rotate 360° for load positioning.

CAPACITIES, ORDER INFO: See Shpg. Note above.

½-ton capacity 8-foot maximum lift. 13-foot chain. Leverage ratio 50:1.

T9 HT 7870C—Shpg. wt. 27 lbs. **\$99.90**

1-ton capacity 8-foot maximum lift. 13-foot chain. Leverage ratio 106:1.

T9 HT 7871C—Shpg. wt. 35 lbs. **\$149.90**

2-ton capacity 8-foot maximum lift. 13-foot chain. Leverage ratio 213:1.

T9 HT 7872L—Shpg. wt. 47 lbs. **\$189.90**

(5) Gear Hoist \$399⁹⁹

CONSTRUCTION: Delivers 40:1 mechanical advantage. Aluminum housing. Forged steel hooks, ¾-in. steel cable. Top hook swivels 360°. Handle lock.

CAPACITY: Gears multiply cranking power . . . let you lift up to 1500 lbs. Maximum lift 10 feet.

ORDERING INFORMATION:

9 HT 7883—Shpg. wt. 8 lbs. 2 oz. **\$39.99**




Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details

Rugged Steel Storage Units

Organize your storage areas, save valuable floor space... choose open-bin or drawer models

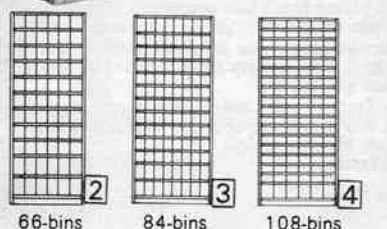

Heavy-duty Storage Bins use 3 sq. ft. of floor space... give you 21 cu. ft. of storage space

(1 thru 4) Shelf-type Units

Dividers are adjustable at 1-inch increments... great for odd sized objects

\$11995

(1 thru 5) Designed for heavy-duty application in garages, workshops, factories and warehouses. Self-standing, large enough to section off areas.

CONSTRUCTION: Four high-carbon steel angle uprights support heavy loads and maintain stability. Solid steel back adds support to entire unit... keeps unit square when heavy objects are stored. Gray enamel protective finish resists chipping and corrosion. Overall: 7 ft. 1 1/8 in. high, 3 ft. wide, 1 ft. deep.

(1 thru 4) Shelf-type Bins

STORAGE FACILITIES: Steel shelves fastened at 10 stress points for support. Vertical steel dividers adjust along shelves in 1-inch intervals.

CAPACITY, ORDER INFO: Sent unassembled. See Shipping Note below.

(1) 21-bin. 3-12x10 1/2, 18-12x12 in. F9 HT 10206N—Wt. 109 lbs. \$119.95

(2) 66-bin. 6-6x5 1/2, 60-6x6 in. F9 HT 10208N—Wt. 160 lbs. \$184.95

(3) 84-bin. 6-6x4 1/2, 78-6x6 in. F9 HT 10205N—Wt. 182 lbs. \$199.95

(4) 108-bin. 6-6x6, 102-6x4 1/2 in. F9 HT 10207N—Wt. 203 lbs. \$249.95

(5) Drawer-type Units

108 drawers... 2 adjustable dividers in each give you 324 compartments

\$54500

(5) Drawer-type Storage Bins

STORAGE FACILITIES: 108 steel drawers each measure 3 1/2 in. high, 5 1/2 in. wide and 11 in. deep... glide smoothly on 2 runners. Each drawer includes 2 dividers to provide 324 separate compartments (extra dividers sold separately below). Corrugated grooves in drawers let you space dividers as close as 1-in. apart. Drawer front and dividers hold identification labels (not included).

ORDERING INFORMATION: Shipped unassembled. See Shipping Note below. Shipping weight 428 lbs. F9 HT 10204N.....\$545.00

(6) Bench-top, Drawer-type Storage Bin. Stackable drawer modules are ideal for use on top or under workbenches, desks, tables.

CONSTRUCTION: All steel cabinet includes back for fully surrounded drawers. Gray enamel finish resists chipping, corrosion. Unit measures 34 1/2 inches wide and 13 1/2 inches high. Available with 11 or 17-inch deep drawers.

STORAGE FACILITIES: 18 steel drawers each 3 1/2 in. high, 5 1/2 in. wide. Two dividers included with each drawer to provide 54 separate storage compartments (extra dividers sold below). Space dividers as close as 1-in. apart. Each drawer front and all dividers hold identification labels (not included).

SIZE, ORDERING INFO: See Shipping Note below. See "N" suffix, page 82.

12-inch deep Drawer Unit

F9 HT 10201N—Wt. 64 lbs. \$79.99

18-inch deep Drawer Unit


F9 HT 10202N—Wt. 84 lbs. \$89.99

Extra Dividers for (5 and 6). Scoop-type design. Steel.

F9 HT 10203—Shipping weight 4 ounces Each 23c

Shipping Note: "F" items (as F9 HT 10203) from Aurora, Ill. factory. Allow time. No C.O.D.'s. Pay shpg. handling from your Distrib. Center. "F" items with "N" pay motor carrier charges from factory.

Portable Power Pulls

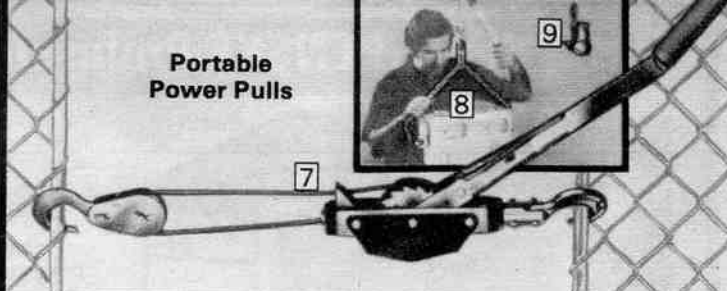

CRAFTSMAN® Power Pulls lift engines, pull out fenders, stretch cable and fencing

(7) Power Pulls. Use as hoist or winch.

CONSTRUCTION: Frame and heat-treated handle of cold rolled steel. Laminated and heat-treated steel ratchet pawl. Cadmium-plated steel parts resist rust. Large ratchet cover. Automatic let-down safety catch. Steel cable. Drop-forged steel hooks.

CAPACITIES, ORDERING INFORMATION:

500-lb. capacity, 10:1 leverage ratio, 14-ft. max. lift, 3/32-in. cable.

9 HT 7860—Shipping weight 6 pounds 2 oz. \$26.90

1000-lb. capacity, 15:1 leverage ratio, 12-ft. max. lift, 1/16-in. cable.

9 HT 7861—Shipping weight 8 pounds 2 oz. 36.90

2000-lb. capacity, 30:1 leverage ratio, 6-ft. max. lift, 1/8-in. cable.

9 HT 7862—Shipping weight 9 pounds 2 oz. 44.90

(8) Motor Sling. Steel chain with 2350-lb. capacity.

9 HT 7830—Shipping weight 2 lbs. 13 oz. 9.90

(9) Wire Gripper. For smooth or barbed wire.

9 HT 7831—Shipping weight 1 pound 5.49

Screw Jacks with extra gripping strength

CONSTRUCTION: Corrugated top for extra gripping strength. Drop-forged screw. Ten-ton jack with 1 1/4x8-inch screw; 20-ton jack with 2x12-inch screw. Strong semi-steel bottom rests evenly on ground, won't slip under duress.

SIZES, CAPACITIES, ORDERING INFORMATION:

Catalog Number	Height closed	Height extended	Cap. tons	Shpg. wt.	Price each
9 HT 7773C	8 1/2 in.	13 in.	5	5 lbs.	\$12.95
9 HT 7774C	11 1/2 in.	17 1/2 in.	10	13 lbs.	18.99
9 HT 7777C	15 1/2 in.	24 1/2 in.	20	28 lbs.	38.99

CRAFTSMAN® Steel Chains

CONSTR.: Proof coil steel. Welded. Electro-galvanizing to fight rust. Drop-forged steel grab and slip hooks. Meets Fed. Spec. RR-C271a for strength. Length of 14 ft. Never use chains above work load limit.

SIZES, CAPACITIES, ORDERING INFORMATION:


Cat. No.	Size, in.	Work load	WL	Price Ea.	2 for
9 HT 77221C	1/4	1250 lbs.	11 lbs.	\$13.99	\$25.18
9 HT 77222C	5/16	1900 lbs.	16 lbs.	18.99	34.18
9 HT 77223C	3/8	2650 lbs.	23 lbs.	26.99	48.58

Heavy-duty Towing Chain.

CONSTRUCTION: Welded, high-test steel. Electro-galvanized. Work load 5400 pounds. Two hooks. 16 feet x 3/8-inch thick.

ORDERING INFORMATION:

9 HT 7767C—Shipping weight 25 lbs. \$39.88



Manila Rope


Oil-sprayed, water-proofed, and chemically treated for long-lasting durability

Low as **4c** per foot

Manila Rope. Manila fibers spun into 3-strand rope. Oil-sprayed, water-proofed. Chemical treatment repels rodents, retards rot.

DIAMETERS, ORDER INFO: State catalog number from chart, then number of feet. Order any length. Lengths available up to 1200 ft. Orders over 70 lbs. shipped by motor carrier.

Diameter inches	Safe workload	Breaking strength	Shpg. wt. (100 ft.)	Catalog Number	Price per ft.
1/4	120 lbs.	540 lbs.	2 lbs.	9 HT 76032C	4c
5/16	270 lbs.	1215 lbs.	5 lbs.	9 HT 76033C	8c
3/8	530 lbs.	2385 lbs.	8 lbs.	9 HT 76034C	14c
1/2	880 lbs.	3960 lbs.	14 lbs.	9 HT 76035C	26c
5/8	1080 lbs.	4860 lbs.	17 lbs.	9 HT 76036C	32c
3/4	1540 lbs.	6930 lbs.	23 lbs.	9 HT 76037C	39c
1	1800 lbs.	8100 lbs.	27 lbs.	9 HT 76038C	46c

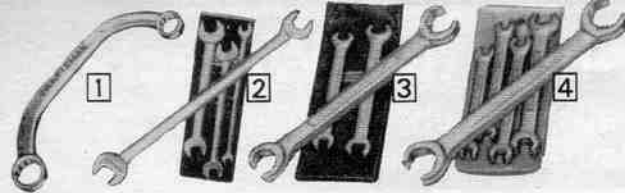

(1-4) CRAFTSMAN® Manifold, Tappet, Flare-nut Wrenches
CONSTRUCTION: Fine-quality tools . . . balance designed and precision broached. Made from drop-forged, chrome-plated steel.

(1) Starter and Manifold Wrench

Specially designed to allow you to work in hard-to-get-at engine areas. Measures $\frac{3}{16} \times \frac{7}{16} \times \frac{1}{4}$ in. long with 12 point openings. ORDERING INFORMATION: See Warranty at right.

Shipping weight 7 ounces.
9 HT 4376 \$4.39

(2) 4-piece Tappet Wrench Set

Use to adjust tappets . . . helps eliminate engine noise. Includes one each of sizes $\frac{3}{16} \times \frac{1}{16}$, $\frac{1}{2} \times \frac{1}{16}$, $\frac{3}{8} \times \frac{1}{16}$, $\frac{3}{4} \times \frac{1}{16}$ inches. Exceed Federal Specifications GGG-W-6366. Plastic pouch included. ORDERING INFORMATION: See Warranty at right.

Shipping weight 1 lb. 4 oz.
9 HT 44452 Set \$13.99

Individual Tappet Wrenches

Catalog Number	Size in.	Wt. oz.	Price
9 HT 44475	$\frac{3}{16} \times \frac{1}{16}$	5	\$3.39
9 HT 44471	$\frac{1}{2} \times \frac{1}{16}$	5	3.69
9 HT 44472	$\frac{3}{8} \times \frac{1}{16}$	6	3.79
9 HT 44473	$\frac{3}{4} \times \frac{1}{16}$	7	3.89
9 HT 44474	$\frac{1}{2} \times \frac{1}{16}$	8	4.29

(3) 3-piece Flare-nut Wrench Set

6-pt. openings. Includes one of each size below. Plastic pouch. ORDERING INFORMATION: See Warranty at right.

9 HT 4433—Wt. 14 oz. Set \$11.99

Standard Flare-nut Wrenches

Catalog Number	Size in.	Length in.	Wt. oz.	Price
9 HT 44174	$\frac{3}{8} \times \frac{1}{16}$	6 in.	4	\$4.19
9 HT 44171	$\frac{1}{2} \times \frac{1}{16}$	6 1/2 in.	5	4.59
9 HT 44173	$\frac{3}{4} \times \frac{1}{16}$	8 1/2 in.	8	4.89

(4) 5-piece Metric Flare-nut Wrench Set

6-pt. openings. Includes one of each size below. Plastic pouch. ORDERING INFORMATION: See Warranty at right.

Shipping weight 1 lb. 7 oz.
9 HT 4434 Set \$17.99

Metric Flare-nut Wrenches

Catalog Number	Size mm.	Length in.	Wt. oz.	Price
9 HT 44175	9 x 11	6 in.	4	\$4.19
9 HT 44176	10 x 12	6 1/2 in.	5	4.29
9 HT 44177	13 x 14	7 in.	5	4.59
9 HT 44178	15 x 17	7 1/2 in.	8	4.89
9 HT 44179	19 x 21	8 in.	9	5.29

CRAFTSMAN® Adjustable-end Wrenches



Precision broached jaws nickel-chrome plated to resist rust
4-inch length
Low as **\$4.97**

CONSTRUCTION: Body constructed of forged high carbon boron steel, heat-treated for strength and durability. Jaws precision broached and hardened. Nickel-chrome plated to resist rust and corrosion. Stainless steel spring-tension knurl helps eliminate "play" to prevent slipping. Thin head for tight spots and close work. Jaw does not protrude at top when closed. Exceeds Fed. Specs. GGG-W-631b for torque strength.

SIZES, ORDER INFO: See Warranty below.

Catalog No.	Size	Capacity	Shpg. wt.	Each
9 HT 44601	4 in.	1/2 in.	4 oz.	\$4.97
9 HT 44602	6 in.	3/4 in.	7 oz.	5.47
9 HT 44603	8 in.	7/8 in.	11 oz.	6.47
9 HT 44604	10 in.	1 1/8 in.	1 lb. 2 oz.	7.77
9 HT 44605	12 in.	1 1/2 in.	1 lb. 13 oz.	10.47
9 HT 44606	16 in.	1 7/8 in.	4 lbs. 3 oz.	16.47

3-pc. Set, 6, 8, 10-in. sizes sold above. Pouch. ORDERING INFORMATION: 9 HT 44607—Wt. 2 lbs. 1 oz. Set \$17.97

FULL UNLIMITED WARRANTY ON CRAFTSMAN® HAND TOOLS. If any Craftsman Hand Tool ever fails to give complete satisfaction, return it to the nearest Sears store throughout the United States and Sears will replace it, free of charge. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

(9) Adjustable-end Wrenches

CONSTRUCTION: Drop-forged alloy steel. Chrome-plated. Polished face. Satin-finished handle. Milled jaws for firm grip. Japan.

SIZES, ORDER INFO: (Not Craftsman)

Cat. No.	length	Opens	Shpg. wt.	Each
9 HT 30874	6	3/4 in.	6 oz.	\$3.49
9 HT 30871	8	7/8 in.	10 oz.	3.99
9 HT 30872	10	1 1/8 in.	15 oz.	4.79
9 HT 30873	12	1 1/2 in.	1 lb. 9 oz.	6.99
9 HT 30877	15	1 7/8 in.	3 lbs. 6 oz.	10.99

3-pc. Set, 6, 8, 10-in. sizes sold above. Pouch. ORDERING INFORMATION: Not Craftsman. 9 HT 30878—Wt. 1 lb. 14 oz. Set \$11.49

(10) CRAFTSMAN® Variable-size Nut Driver

CONSTR.: Fluted plastic handle. Rounded end for pressure turning. Positive locking device.

USES: Holds hex nuts and bolts for easy starting and removal when working in tight places.

RANGE: Adjusts to a wide range of nut and bolt sizes. Hex nuts— $\frac{1}{4}$ thru $\frac{7}{16}$ -inch. Hex-head bolts—No. 6 thru $\frac{1}{4}$ -inch diameter.

ORDERING INFO: See Warranty above left.
9 HT 41991—Shipping weight 12 ounces . . . \$5.99

(11) 7-pc. CRAFTSMAN Nut Driver Set in standard or metric sizes

CONSTRUCTION: Hardened sockets. Plastic handles. Hollow shanks. All nut drivers in set fit hex nuts. Set includes 1 each of 7 sizes listed below in either metric or standard sizes. Pouch.

ORDERING INFO: See Warranty above left.
9 HT 41986—Standard. Wt. 1 lb. 8 oz. . . . Set \$13.99
9 HT 41987—Metric. Wt. 1 lb. 8 oz. Set 13.99

Individual Nut Drivers

Standard Nut Drivers					Metric Nut Drivers				
Catalog Number	Size in.	Nut size	Wt. oz.	Price each	Catalog Number	Size Mm.	Wt. Oz.	Price Each	
9 HT 41977	$\frac{3}{16}$	2-3	5	\$2.39	9 HT 41981	5	5	\$2.39	
9 HT 41971	$\frac{1}{4}$	4	5	2.39	9 HT 41982	6	5	2.39	
9 HT 41972	$\frac{5}{16}$	5-6	5	2.39	9 HT 41983	7	5	2.39	
9 HT 41973	$\frac{1}{2}$	8	5	2.39	9 HT 41984	8	5	2.39	
9 HT 41974	$\frac{3}{8}$	10	5	2.39	9 HT 41985	9	5	2.39	
9 HT 41975	$\frac{7}{16}$	12-1/4	6	2.39	9 HT 41986	10	6	2.39	
9 HT 41976	$\frac{1}{2}$	$\frac{3}{16}$	6	2.39	9 HT 41987	11	6	2.39	



(5) 4-pc. Midget Box-end Wrench Sets . . . choose standard or metric sizes

CONSTRUCTION: Chrome-plated steel. 6 pt. openings. Pouch.

SIZES: Standard— $\frac{3}{16} \times \frac{1}{16}$, $\frac{1}{2} \times \frac{1}{16}$, $\frac{3}{8} \times \frac{1}{16}$, $\frac{3}{4} \times \frac{1}{16}$ inch. Metric—4.5x5, 5.5x6, 6x7, 8x9-mm.

ORDER INFO: Wt. 4 oz. See Warranty above right.

9 HT 4379—Standard. Set \$4.99
9 HT 4377—Metric . . . Set \$4.99

(8) Ignition File

CONSTRUCTION: Kromed® finish for durability. Double cut 5 inches long.

ORDERING INFORMATION: See Warranty above right.

9 HT 3119—Wt. 3 oz. 49c

(6) 8-pc. Open-end Ignition Sets . . . choose standard or metric sizes

CONSTRUCTION: Heat-treated steel. Chrome-plated to resist rust. Fifteen degree angle heads at one end, Eighty degree angle heads at other. Same size opening both ends. Plastic pouch.

SIZES: Standard— $\frac{3}{16}$, $\frac{1}{2}$, $\frac{3}{8}$, $\frac{3}{4}$, $\frac{1}{2}$, $\frac{3}{8}$, $\frac{1}{2}$, $\frac{3}{4}$ inch. Metric—5, 5.5, 6, 7, 8, 9, 10, 11-mm.

ORD. INFO: See Craftsman Warranty above.

Standard—Shpg. wt. 6 oz.
9 HT 4306 Set \$7.99

Metric—Shpg. wt. 7 oz.
9 HT 4308 Set \$7.99

(7) 10-pc. Combination Ignition Sets . . . choose standard or metric sizes

CONSTRUCTION: Heat-treated steel. Chrome-plated to resist rust. Box-end at one end of wrench; offset, open-end at other. Plastic pouch included.

SIZES: Standard— $\frac{3}{16}$ to $\frac{3}{4}$ inch. Metric—4x4.5 to 10x11-mm.

ORDERING INFO: See Warranty above.

Standard.
Shipping weight 6 oz.
9 HT 43441 Set \$8.99

Metric.
Shipping weight 6 oz.
9 HT 43443 Set \$8.99



(12) 14-pc. Ignition Set.

Nickel-plated steel. 8 combination midget wrenches; pliers; screwdriver; 6-leaf thickness gauge; file; 2 punches; pouch.

ORDER INFO: Not Craftsman. Wt. 10 oz.

Standard. Incl. wrenches $\frac{1}{4}$ to $\frac{3}{4}$ in.

9 HT 44671 Set \$4.59

Metric. Incl. wrenches 4x4.5 mm to 10x11mm.

9 HT 44674 Set \$4.59

(13 thru 16) Combination, Open-end and Box-end Wrench Sets in standard and metric sizes

CONSTRUCTION: Nickel-chrome plated select steel, accurately broached and heat-treated for strength. Highly polished heads. 12-pt. box-end openings. Plastic pouch. Not Craftsman. From Japan.

TYPES, SIZES, ORDERING INFORMATION:

Type of Wrench Set	Size of openings (in.) (6-pc. Sets except 9 HT 4351)	Catalog Number	Wt. lbs.	Price Set
(13) Std. Comb. Metric Comb.	$\frac{3}{16}$, $\frac{1}{2}$, $\frac{3}{8}$, $\frac{3}{4}$, $\frac{1}{2}$, $\frac{3}{8}$, $\frac{1}{2}$, $\frac{3}{4}$ in.	9 HT 4390	1	\$5.99
(14) Standard Open-end Metric Open-end	$\frac{3}{16}$ to $\frac{3}{4}$ in.	9 HT 43702	1	5.99
(15) Standard Box-end Metric Box-end	$\frac{3}{16}$ to $\frac{3}{4}$ in.	9 HT 4383	1	4.99
(16) Std. Box-end	$\frac{3}{16}$ to $\frac{3}{4}$ in.	9 HT 4387	2	3.99
		9 HT 4384	1	6.99
		9 HT 4351	11	2.99



(17) 9-piece Set

CONSTRUCTION: Plastic handles. 4 nut-drivers: $\frac{1}{4}$, $\frac{3}{16}$, $\frac{1}{2}$, $\frac{3}{4}$ in. Nos. 1, 2 Robertson clutch head. 5 screwdrivers: $\frac{1}{8}$, $\frac{3}{16}$, $\frac{1}{2}$, $\frac{3}{4}$ in. Nos. 1, 2 Phillips straight slot. Includes plastic pouch.

ORDERING INFO: Warranty above.

Shpg. wt. 1 lb. 2 oz.
9 HT 45112 Set \$7.99

(18) 10-pc. Set

CONSTRUCTION: Plastic handles. 5 nut-drivers: $\frac{1}{4}$, $\frac{3}{16}$, $\frac{1}{2}$, $\frac{3}{4}$ in. 5 screwdrivers: $\frac{1}{8}$, $\frac{3}{16}$, $\frac{1}{2}$, $\frac{3}{4}$ in. flat-edge. Nos. 1, 2 Phillips. Includes plastic pouch.

ORDERING INFORMATION: Warranty above.


Shpg. wt. 1 lb. 1 oz.
9 HT 45111 Set \$7.99

Open-end, Box-end and Combination Wrenches

Choose STANDARD or METRIC sizes — all nickel-chrome plated to resist rust, drop-forged to withstand pressure at greatest stress points

FULL UNLIMITED WARRANTY ON CRAFTSMAN® HAND TOOLS

If any CRAFTSMAN Hand Tool ever fails to give complete satisfaction, return it to the nearest Sears store throughout the United States and Sears will replace it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

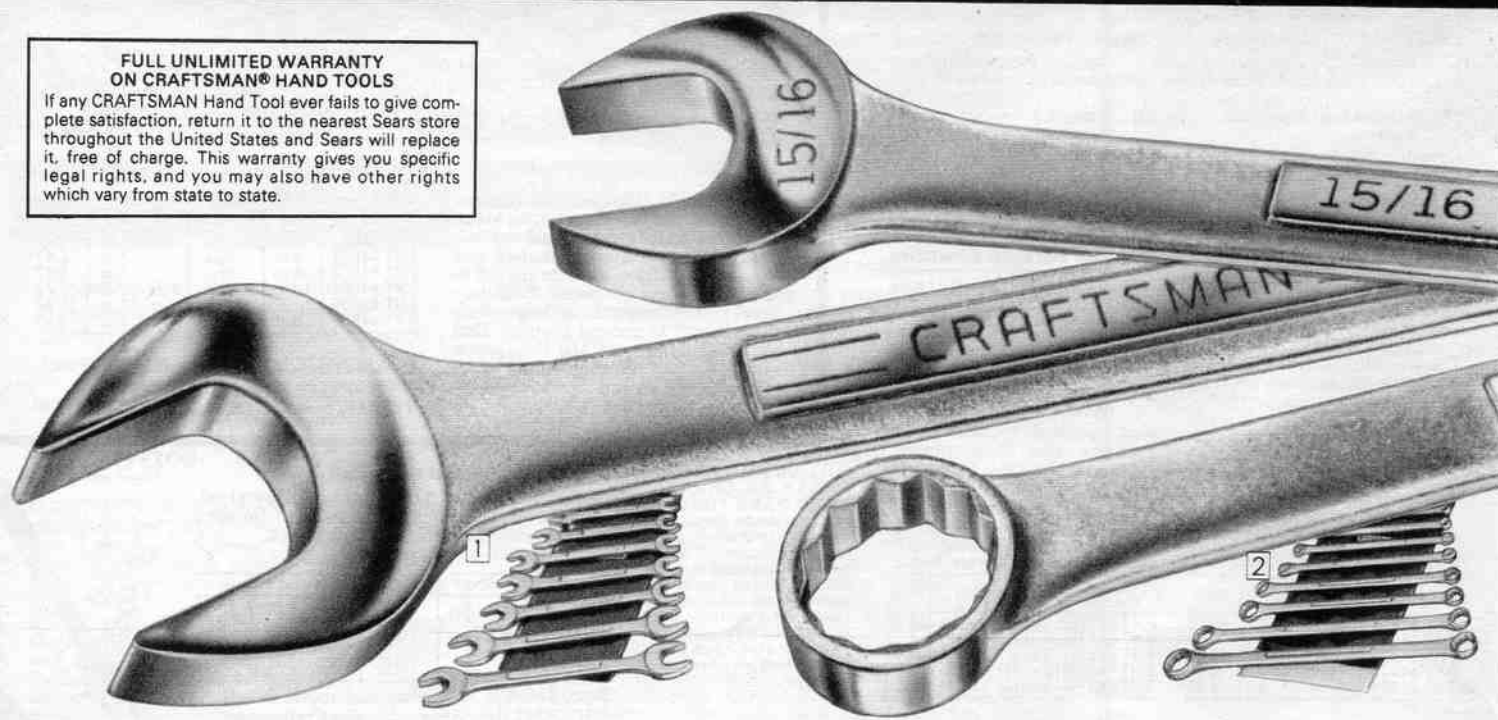

12-pc. STANDARD Open-end Wrench Set **\$59⁹⁹**

10-pc. STANDARD Box-end Wrench Set **\$33⁹⁹**


(1) Open-end Wrenches STANDARD or METRIC

STANDARD Open-end Sets

12-piece Set
Separate prices total \$72.58
SET INCLUDES: Sizes 1/4x3/16, 3/8x7/16, 1/2x9/16, 5/16x5/8, 3/4x1, 11/16x1 1/8, 1 1/8x1 5/8, 1 1/4x1 3/4, 1 1/2x1 7/8, 1 3/4x2, 2x2 1/4, 2 1/4x2 3/4, 2 1/2x2 7/8, 2 3/4x3, 3x3 1/4, 3 1/4x3 1/2, 3 1/2x3 3/4, 3 3/4x4, 4x4 1/4, 4 1/4x4 1/2, 4 1/2x4 3/4, 4 3/4x5, 5x5 1/4, 5 1/4x5 1/2, 5 1/2x5 3/4, 5 3/4x6, 6x6 1/4, 6 1/4x6 1/2, 6 1/2x6 3/4, 6 3/4x7, 7x7 1/4, 7 1/4x7 1/2, 7 1/2x7 3/4, 7 3/4x8, 8x8 1/4, 8 1/4x8 1/2, 8 1/2x8 3/4, 8 3/4x9, 9x9 1/4, 9 1/4x9 1/2, 9 1/2x9 3/4, 9 3/4x10, 10x10 1/4, 10 1/4x10 1/2, 10 1/2x10 3/4, 10 3/4x11, 11x11 1/4, 11 1/4x11 1/2, 11 1/2x11 3/4, 11 3/4x12, 12x12 1/4, 12 1/4x12 1/2, 12 1/2x12 3/4, 12 3/4x13, 13x13 1/4, 13 1/4x13 1/2, 13 1/2x13 3/4, 13 3/4x14, 14x14 1/4, 14 1/4x14 1/2, 14 1/2x14 3/4, 14 3/4x15, 15x15 1/4, 15 1/4x15 1/2, 15 1/2x15 3/4, 15 3/4x16, 16x16 1/4, 16 1/4x16 1/2, 16 1/2x16 3/4, 16 3/4x17, 17x17 1/4, 17 1/4x17 1/2, 17 1/2x17 3/4, 17 3/4x18, 18x18 1/4, 18 1/4x18 1/2, 18 1/2x18 3/4, 18 3/4x19, 19x19 1/4, 19 1/4x19 1/2, 19 1/2x19 3/4, 19 3/4x20, 20x20 1/4, 20 1/4x20 1/2, 20 1/2x20 3/4, 20 3/4x21, 21x21 1/4, 21 1/4x21 1/2, 21 1/2x21 3/4, 21 3/4x22, 22x22 1/4, 22 1/4x22 1/2, 22 1/2x22 3/4, 22 3/4x23, 23x23 1/4, 23 1/4x23 1/2, 23 1/2x23 3/4, 23 3/4x24, 24x24 1/4, 24 1/4x24 1/2, 24 1/2x24 3/4, 24 3/4x25, 25x25 1/4, 25 1/4x25 1/2, 25 1/2x25 3/4, 25 3/4x26, 26x26 1/4, 26 1/4x26 1/2, 26 1/2x26 3/4, 26 3/4x27, 27x27 1/4, 27 1/4x27 1/2, 27 1/2x27 3/4, 27 3/4x28, 28x28 1/4, 28 1/4x28 1/2, 28 1/2x28 3/4, 28 3/4x29, 29x29 1/4, 29 1/4x29 1/2, 29 1/2x29 3/4, 29 3/4x30, 30x30 1/4, 30 1/4x30 1/2, 30 1/2x30 3/4, 30 3/4x31, 31x31 1/4, 31 1/4x31 1/2, 31 1/2x31 3/4, 31 3/4x32, 32x32 1/4, 32 1/4x32 1/2, 32 1/2x32 3/4, 32 3/4x33, 33x33 1/4, 33 1/4x33 1/2, 33 1/2x33 3/4, 33 3/4x34, 34x34 1/4, 34 1/4x34 1/2, 34 1/2x34 3/4, 34 3/4x35, 35x35 1/4, 35 1/4x35 1/2, 35 1/2x35 3/4, 35 3/4x36, 36x36 1/4, 36 1/4x36 1/2, 36 1/2x36 3/4, 36 3/4x37, 37x37 1/4, 37 1/4x37 1/2, 37 1/2x37 3/4, 37 3/4x38, 38x38 1/4, 38 1/4x38 1/2, 38 1/2x38 3/4, 38 3/4x39, 39x39 1/4, 39 1/4x39 1/2, 39 1/2x39 3/4, 39 3/4x40, 40x40 1/4, 40 1/4x40 1/2, 40 1/2x40 3/4, 40 3/4x41, 41x41 1/4, 41 1/4x41 1/2, 41 1/2x41 3/4, 41 3/4x42, 42x42 1/4, 42 1/4x42 1/2, 42 1/2x42 3/4, 42 3/4x43, 43x43 1/4, 43 1/4x43 1/2, 43 1/2x43 3/4, 43 3/4x44, 44x44 1/4, 44 1/4x44 1/2, 44 1/2x44 3/4, 44 3/4x45, 45x45 1/4, 45 1/4x45 1/2, 45 1/2x45 3/4, 45 3/4x46, 46x46 1/4, 46 1/4x46 1/2, 46 1/2x46 3/4, 46 3/4x47, 47x47 1/4, 47 1/4x47 1/2, 47 1/2x47 3/4, 47 3/4x48, 48x48 1/4, 48 1/4x48 1/2, 48 1/2x48 3/4, 48 3/4x49, 49x49 1/4, 49 1/4x49 1/2, 49 1/2x49 3/4, 49 3/4x50, 50x50 1/4, 50 1/4x50 1/2, 50 1/2x50 3/4, 50 3/4x51, 51x51 1/4, 51 1/4x51 1/2, 51 1/2x51 3/4, 51 3/4x52, 52x52 1/4, 52 1/4x52 1/2, 52 1/2x52 3/4, 52 3/4x53, 53x53 1/4, 53 1/4x53 1/2, 53 1/2x53 3/4, 53 3/4x54, 54x54 1/4, 54 1/4x54 1/2, 54 1/2x54 3/4, 54 3/4x55, 55x55 1/4, 55 1/4x55 1/2, 55 1/2x55 3/4, 55 3/4x56, 56x56 1/4, 56 1/4x56 1/2, 56 1/2x56 3/4, 56 3/4x57, 57x57 1/4, 57 1/4x57 1/2, 57 1/2x57 3/4, 57 3/4x58, 58x58 1/4, 58 1/4x58 1/2, 58 1/2x58 3/4, 58 3/4x59, 59x59 1/4, 59 1/4x59 1/2, 59 1/2x59 3/4, 59 3/4x60, 60x60 1/4, 60 1/4x60 1/2, 60 1/2x60 3/4, 60 3/4x61, 61x61 1/4, 61 1/4x61 1/2, 61 1/2x61 3/4, 61 3/4x62, 62x62 1/4, 62 1/4x62 1/2, 62 1/2x62 3/4, 62 3/4x63, 63x63 1/4, 63 1/4x63 1/2, 63 1/2x63 3/4, 63 3/4x64, 64x64 1/4, 64 1/4x64 1/2, 64 1/2x64 3/4, 64 3/4x65, 65x65 1/4, 65 1/4x65 1/2, 65 1/2x65 3/4, 65 3/4x66, 66x66 1/4, 66 1/4x66 1/2, 66 1/2x66 3/4, 66 3/4x67, 67x67 1/4, 67 1/4x67 1/2, 67 1/2x67 3/4, 67 3/4x68, 68x68 1/4, 68 1/4x68 1/2, 68 1/2x68 3/4, 68 3/4x69, 69x69 1/4, 69 1/4x69 1/2, 69 1/2x69 3/4, 69 3/4x70, 70x70 1/4, 70 1/4x70 1/2, 70 1/2x70 3/4, 70 3/4x71, 71x71 1/4, 71 1/4x71 1/2, 71 1/2x71 3/4, 71 3/4x72, 72x72 1/4, 72 1/4x72 1/2, 72 1/2x72 3/4, 72 3/4x73, 73x73 1/4, 73 1/4x73 1/2, 73 1/2x73 3/4, 73 3/4x74, 74x74 1/4, 74 1/4x74 1/2, 74 1/2x74 3/4, 74 3/4x75, 75x75 1/4, 75 1/4x75 1/2, 75 1/2x75 3/4, 75 3/4x76, 76x76 1/4, 76 1/4x76 1/2, 76 1/2x76 3/4, 76 3/4x77, 77x77 1/4, 77 1/4x77 1/2, 77 1/2x77 3/4, 77 3/4x78, 78x78 1/4, 78 1/4x78 1/2, 78 1/2x78 3/4, 78 3/4x79, 79x79 1/4, 79 1/4x79 1/2, 79 1/2x79 3/4, 79 3/4x80, 80x80 1/4, 80 1/4x80 1/2, 80 1/2x80 3/4, 80 3/4x81, 81x81 1/4, 81 1/4x81 1/2, 81 1/2x81 3/4, 81 3/4x82, 82x82 1/4, 82 1/4x82 1/2, 82 1/2x82 3/4, 82 3/4x83, 83x83 1/4, 83 1/4x83 1/2, 83 1/2x83 3/4, 83 3/4x84, 84x84 1/4, 84 1/4x84 1/2, 84 1/2x84 3/4, 84 3/4x85, 85x85 1/4, 85 1/4x85 1/2, 85 1/2x85 3/4, 85 3/4x86, 86x86 1/4, 86 1/4x86 1/2, 86 1/2x86 3/4, 86 3/4x87, 87x87 1/4, 87 1/4x87 1/2, 87 1/2x87 3/4, 87 3/4x88, 88x88 1/4, 88 1/4x88 1/2, 88 1/2x88 3/4, 88 3/4x89, 89x89 1/4, 89 1/4x89 1/2, 89 1/2x89 3/4, 89 3/4x90, 90x90 1/4, 90 1/4x90 1/2, 90 1/2x90 3/4, 90 3/4x91, 91x91 1/4, 91 1/4x91 1/2, 91 1/2x91 3/4, 91 3/4x92, 92x92 1/4, 92 1/4x92 1/2, 92 1/2x92 3/4, 92 3/4x93, 93x93 1/4, 93 1/4x93 1/2, 93 1/2x93 3/4, 93 3/4x94, 94x94 1/4, 94 1/4x94 1/2, 94 1/2x94 3/4, 94 3/4x95, 95x95 1/4, 95 1/4x95 1/2, 95 1/2x95 3/4, 95 3/4x96, 96x96 1/4, 96 1/4x96 1/2, 96 1/2x96 3/4, 96 3/4x97, 97x97 1/4, 97 1/4x97 1/2, 97 1/2x97 3/4, 97 3/4x98, 98x98 1/4, 98 1/4x98 1/2, 98 1/2x98 3/4, 98 3/4x99, 99x99 1/4, 99 1/4x99 1/2, 99 1/2x99 3/4, 99 3/4x100, 100x100 1/4, 100 1/4x100 1/2, 100 1/2x100 3/4, 100 3/4x101, 101x101 1/4, 101 1/4x101 1/2, 101 1/2x101 3/4, 101 3/4x102, 102x102 1/4, 102 1/4x102 1/2, 102 1/2x102 3/4, 102 3/4x103, 103x103 1/4, 103 1/4x103 1/2, 103 1/2x103 3/4, 103 3/4x104, 104x104 1/4, 104 1/4x104 1/2, 104 1/2x104 3/4, 104 3/4x105, 105x105 1/4, 105 1/4x105 1/2, 105 1/2x105 3/4, 105 3/4x106, 106x106 1/4, 106 1/4x106 1/2, 106 1/2x106 3/4, 106 3/4x107, 107x107 1/4, 107 1/4x107 1/2, 107 1/2x107 3/4, 107 3/4x108, 108x108 1/4, 108 1/4x108 1/2, 108 1/2x108 3/4, 108 3/4x109, 109x109 1/4, 109 1/4x109 1/2, 109 1/2x109 3/4, 109 3/4x110, 110x110 1/4, 110 1/4x110 1/2, 110 1/2x110 3/4, 110 3/4x111, 111x111 1/4, 111 1/4x111 1/2, 111 1/2x111 3/4, 111 3/4x112, 112x112 1/4, 112 1/4x112 1/2, 112 1/2x112 3/4, 112 3/4x113, 113x113 1/4, 113 1/4x113 1/2, 113 1/2x113 3/4, 113 3/4x114, 114x114 1/4, 114 1/4x114 1/2, 114 1/2x114 3/4, 114 3/4x115, 115x115 1/4, 115 1/4x115 1/2, 115 1/2x115 3/4, 115 3/4x116, 116x116 1/4, 116 1/4x116 1/2, 116 1/2x116 3/4, 116 3/4x117, 117x117 1/4, 117 1/4x117 1/2, 117 1/2x117 3/4, 117 3/4x118, 118x118 1/4, 118 1/4x118 1/2, 118 1/2x118 3/4, 118 3/4x119, 119x119 1/4, 119 1/4x119 1/2, 119 1/2x119 3/4, 119 3/4x120, 120x120 1/4, 120 1/4x120 1/2, 120 1/2x120 3/4, 120 3/4x121, 121x121 1/4, 121 1/4x121 1/2, 121 1/2x121 3/4, 121 3/4x122, 122x122 1/4, 122 1/4x122 1/2, 122 1/2x122 3/4, 122 3/4x123, 123x123 1/4, 123 1/4x123 1/2, 123 1/2x123 3/4, 123 3/4x124, 124x124 1/4, 124 1/4x124 1/2, 124 1/2x124 3/4, 124 3/4x125, 125x125 1/4, 125 1/4x125 1/2, 125 1/2x125 3/4, 125 3/4x126, 126x126 1/4, 126 1/4x126 1/2, 126 1/2x126 3/4, 126 3/4x127, 127x127 1/4, 127 1/4x127 1/2, 127 1/2x127 3/4, 127 3/4x128, 128x128 1/4, 128 1/4x128 1/2, 128 1/2x128 3/4, 128 3/4x129, 129x129 1/4, 129 1/4x129 1/2, 129 1/2x129 3/4, 129 3/4x130, 130x130 1/4, 130 1/4x130 1/2, 130 1/2x130 3/4, 130 3/4x131, 131x131 1/4, 131 1/4x131 1/2, 131 1/2x131 3/4, 131 3/4x132, 132x132 1/4, 132 1/4x132 1/2, 132 1/2x132 3/4, 132 3/4x133, 133x133 1/4, 133 1/4x133 1/2, 133 1/2x133 3/4, 133 3/4x134, 134x134 1/4, 134 1/4x134 1/2, 134 1/2x134 3/4, 134 3/4x135, 135x135 1/4, 135 1/4x135 1/2, 135 1/2x135 3/4, 135 3/4x136, 136x136 1/4, 136 1/4x136 1/2, 136 1/2x136 3/4, 136 3/4x137, 137x137 1/4, 137 1/4x137 1/2, 137 1/2x137 3/4, 137 3/4x138, 138x138 1/4, 138 1/4x138 1/2, 138 1/2x138 3/4, 138 3/4x139, 139x139 1/4, 139 1/4x139 1/2, 139 1/2x139 3/4, 139 3/4x140, 140x140 1/4, 140 1/4x140 1/2, 140 1/2x140 3/4, 140 3/4x141, 141x141 1/4, 141 1/4x141 1/2, 141 1/2x141 3/4, 141 3/4x142, 142x142 1/4, 142 1/4x142 1/2, 142 1/2x142 3/4, 142 3/4x143, 143x143 1/4, 143 1/4x143 1/2, 143 1/2x143 3/4, 143 3/4x144, 144x144 1/4, 144 1/4x144 1/2, 144 1/2x144 3/4, 144 3/4x145, 145x145 1/4, 145 1/4x145 1/2, 145 1/2x145 3/4, 145 3/4x146, 146x146 1/4, 146 1/4x146 1/2, 146 1/2x146 3/4, 146 3/4x147, 147x147 1/4, 147 1/4x147 1/2, 147 1/2x147 3/4, 147 3/4x148, 148x148 1/4, 148 1/4x148 1/2, 148 1/2x148 3/4, 148 3/4x149, 149x149 1/4, 149 1/4x149 1/2, 149 1/2x149 3/4, 149 3/4x150, 150x150 1/4, 150 1/4x150 1/2, 150 1/2x150 3/4, 150 3/4x151, 151x151 1/4, 151 1/4x151 1/2, 151 1/2x151 3/4, 151 3/4x152, 152x152 1/4, 152 1/4x152 1/2, 152 1/2x152 3/4, 152 3/4x153, 153x153 1/4, 153 1/4x153 1/2, 153 1/2x153 3/4, 153 3/4x154, 154x154 1/4, 154 1/4x154 1/2, 154 1/2x154 3/4, 154 3/4x155, 155x155 1/4, 155 1/4x155 1/2, 155 1/2x155 3/4, 155 3/4x156, 156x156 1/4, 156 1/4x156 1/2, 156 1/2x156 3/4, 156 3/4x157, 157x157 1/4, 157 1/4x157 1/2, 157 1/2x157 3/4, 157 3/4x158, 158x158 1/4, 158 1/4x158 1/2, 158 1/2x158 3/4, 158 3/4x159, 159x159 1/4, 159 1/4x159 1/2, 159 1/2x159 3/4, 159 3/4x160, 160x160 1/4, 160 1/4x160 1/2, 160 1/2x160 3/4, 160 3/4x161, 161x161 1/4, 161 1/4x161 1/2, 161 1/2x161 3/4, 161 3/4x162, 162x162 1/4, 162 1/4x162 1/2, 162 1/2x162 3/4, 162 3/4x163, 163x163 1/4, 163 1/4x163 1/2, 163 1/2x163 3/4, 163 3/4x164, 164x164 1/4, 164 1/4x164 1/2, 164 1/2x164 3/4, 164 3/4x165, 165x165 1/4, 165 1/4x165 1/2, 165 1/2x165 3/4, 165 3/4x166, 166x166 1/4, 166 1/4x166 1/2, 166 1/2x166 3/4, 166 3/4x167, 167x167 1/4, 167 1/4x167 1/2, 167 1/2x167 3/4, 167 3/4x168, 168x168 1/4, 168 1/4x168 1/2, 168 1/2x168 3/4, 168 3/4x169, 169x169 1/4, 169 1/4x169 1/2, 169 1/2x169 3/4, 169 3/4x170, 170x170 1/4, 170 1/4x170 1/2, 170 1/2x170 3/4, 170 3/4x171, 171x171 1/4, 171 1/4x171 1/2, 171 1/2x171 3/4, 171 3/4x172, 172x172 1/4, 172 1/4x172 1/2, 172 1/2x172 3/4, 172 3/4x173, 173x173 1/4, 173 1/4x173 1/2, 173 1/2x173 3/4, 173 3/4x174, 174x174 1/4, 174 1/4x174 1/2, 174 1/2x174 3/4, 174 3/4x175, 175x175 1/4, 175 1/4x175 1/2, 175 1/2x175 3/4, 175 3/4x176, 176x176 1/4, 176 1/4x176 1/2, 176 1/2x176 3/4, 176 3/4x177, 177x177 1/4, 177 1/4x177 1/2, 177 1/2x177 3/4, 177 3/4x178, 178x178 1/4, 178 1/4x178 1/2, 178 1/2x178 3/4, 178 3/4x179, 179x179 1/4, 179 1/4x179 1/2, 179 1/2x179 3/4, 179 3/4x180, 180x180 1/4, 180 1/4x180 1/2, 180 1/2x180 3/4, 180 3/4x181, 181x181 1/4, 181 1/4x181 1/2, 181 1/2x181 3/4, 181 3/4x182, 182x182 1/4, 182 1/4x182 1/2, 182 1/2x182 3/4, 182 3/4x183, 183x183 1/4, 183 1/4x183 1/2, 183 1/2x183 3/4, 183 3/4x184, 184x184 1/4, 184 1/4x184 1/2, 184 1/2x184 3/4, 184 3/4x185, 185x185 1/4, 185 1/4x185 1/2, 185 1/2x185 3/4, 185 3/4x186, 186x186 1/4, 186 1/4x186 1/2, 186 1/2x186 3/4, 186 3/4x187, 187x187 1/4, 187 1/4x187 1/2, 187 1/2x187 3/4, 187 3/4x188, 188x188 1/4, 188 1/4x188 1/2, 188 1/2x188 3/4, 188 3/4x189, 189x189 1/4, 189 1/4x189 1/2, 189 1/2x189 3/4, 189 3/4x190, 190x190 1/4, 190 1/4x190 1/2, 190 1/2x190 3/4, 190 3/4x191, 191x191 1/4, 191 1/4x191 1/2, 191 1/2x191 3/4, 191 3/4x192, 192x192 1/4, 192 1/4x192 1/2, 192 1/2x192 3/4, 192 3/4x193, 193x193 1/4, 193 1/4x193 1/2, 193 1/2x193 3/4, 193 3/4x194, 194x194 1/4, 194 1/4x194 1/2, 194 1/2x194 3/4, 194 3/4x195, 195x195 1/4, 195 1/4x195 1/2, 195 1/2x195 3/4, 195 3/4x196, 196x196 1/4, 196 1/4x196 1/2, 196 1/2x196 3/4, 196 3/4x197, 197x197 1/4, 197 1/4x197 1/2, 197 1/2x197 3/4, 197 3/4x198, 198x198 1/4, 198 1/4x198 1/2, 198 1/2x198 3/4, 198 3/4x199, 199x199 1/4, 199 1/4x199 1/2, 199 1/2x199 3/4, 199 3/4x200, 200x200 1/4, 200 1/4x200 1/2, 200 1/2x200 3/4, 200 3/4x201, 201x201 1/4, 201 1/4x201 1/2, 201 1/2x201 3/4, 201 3/4x202, 202x202 1/4, 202 1/4x202 1/2, 202 1/2x202 3/4, 202 3/4x203, 203x203 1/4, 203 1/4x203 1/2, 203 1/2x203 3/4, 203 3/4x204, 204x204 1/4, 204 1/4x204 1/2, 204 1/2x204 3/4, 204 3/4x205, 205x205 1/4, 205 1/4x205 1/2, 205 1/2x205 3/4, 205 3/4x206, 206x206 1/4, 206 1/4x206 1/2, 206 1/2x206 3/4, 206 3/4x207, 207x207 1/4, 207 1/4x207 1/2, 207 1/2x207 3/4, 207 3/4x208, 208x208 1/4, 208 1/4x208 1/2, 208 1/2x208 3/4, 208 3/4x209, 209x209 1/4, 209 1/4x209 1/2, 209 1/2x209 3/4, 209 3/4x210, 210x210 1/4, 210

Here's what makes these CRAFTSMAN Wrenches so outstanding: Drop-forged to provide strength at points of greatest stress. Select molybdenum alloy steel construction for the toughness needed to loosen stubborn nuts and bolts. Heat-treated, then oil quenched and tempered to uniformly "through-harden" so there are no inner soft spots.

Nickel-chrome plating adds rust, corrosion resistance. Matte finish helps provide firm grip. Sizes stamped into each wrench for easy identification. And you'll never have to pay for replacing CRAFTSMAN Wrench... we back them with our famous full unlimited warranty found on facing page.

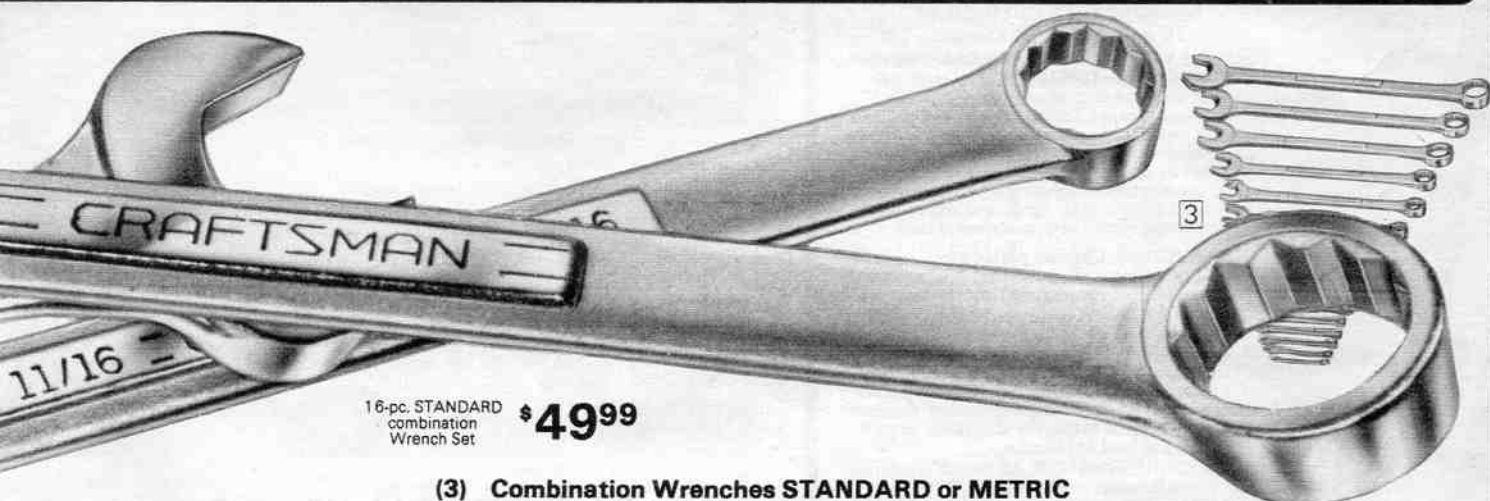

16-pc. STANDARD combination Wrench Set **\$49.99**

(3) Combination Wrenches STANDARD or METRIC

STANDARD Combination Wrench Sets

16-piece Set
Separate prices total \$67.54.
SET INCLUDES: Sizes 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1 1/16, 1 1/8, 1 1/4-in. Cardboard box.
ORDERING INFO: See construction features above and Warranty p. 50.
Shipping weight 9 lbs. 15 oz.
9 HT 44968 Set \$49.99

14-piece Set
Separate prices total \$63.86.
SET INCLUDES: Sizes 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1 1/16, 1 1/8, 1 1/4-inch; and also includes plastic storage pouch.
ORDERING INFORMATION: See construction features described above and Warranty on opposite page.
Shipping weight 10 lbs. 8 oz.
9 HT 44964 Set \$47.99

10-piece Set
Separate prices total \$34.40.
SET INCLUDES: Sizes 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 7/8, 15/16, 1-inch. Plastic storage pouch included.
ORDERING INFORMATION: See construction features described above and Warranty on opposite page.
Shipping weight 4 lbs.
9 HT 4496 Set \$27.99

6-piece Set
Separate prices total \$17.74.
SET INCLUDES: Sizes 7/16, 1/2, 9/16, 5/8, 11/16 and 3/4-inch. Plastic storage pouch included.
ORDERING INFORMATION: See construction features described above and Warranty on opposite page.
Shipping weight 1 lb. 12 oz.
9 HT 4462 Set \$13.50

METRIC Combination Wrench Sets

16-piece Set
Separate prices total \$61.54.
SET INCLUDES: Sizes 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24 and 27mm.
ORDERING INFORMATION: See construction features described above and Warranty on opposite page.
9 HT 42907—Wt. 7 lbs. 15 oz. Set \$44.99

14-piece Set
Separate prices total \$43.96.
SET INCLUDES: Sizes 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 19, 22 and 24mm. Plastic storage pouch included.
ORDERING INFO: See construction features above and Warranty p. 50.
9 HT 42908—Wt. 4 lbs. 7 oz. Set \$38.99

10-piece Set
Separate prices total \$29.10.
SET INCLUDES: Sizes 6, 8, 9, 10, 12, 13, 14, 15, 17 and 19mm. Includes plastic storage pouch.
ORDERING INFO: See construction features above and Warranty p. 50.
Shipping weight 2 lbs. 4 oz.
9 HT 4291 Set \$25.99

6-piece SET
Separate prices total \$16.14.
SET INCLUDES: Sizes 8, 9, 10, 12, 13, 14mm; plastic storage pouch.
ORDERING INFO: See construction features above and Warranty p. 50.
Shipping weight 1 lb. 3 oz.
9 HT 4292 Set \$13.50

Individual Combination Wrenches

ORDER INFO: See construction features above and Warranty page 50.


Catalog Number	Size (mm.)	Length (in.)	Wt. oz.	Each	Catalog Number	Size (mm.)	Length (in.)	Wt.		Each
								lbs.	oz.	
9 HT 42909	6	3 3/16	3	\$2.39	9 HT 42925	18	8 1/16	8	\$3.69	
9 HT 42911	7	3 3/16	3	2.49	9 HT 42921	19	9 1/2	9	3.89	
9 HT 42912	8	4 1/16	3	2.49	9 HT 42937	20	10 1/4	11	4.19	
9 HT 42913	9	4 3/8	3	2.49	9 HT 42938	21	10 7/8	13	4.39	
9 HT 42914	10	4 3/4	3	2.59	9 HT 42922	22	11 1/16	11	4.59	
9 HT 42915	11	5 3/8	4	2.59	9 HT 42939	23	12 1/8	15	4.89	
9 HT 42916	12	5 7/8	4	2.79	9 HT 42923	24	12 1/4	14	5.19	
9 HT 42917	13	6 1/8	5	2.89	9 HT 42931	25	13 1/8	1	2	5.49
9 HT 42918	14	6 7/8	5	2.89	9 HT 42932	26	14 1/16	1	4	6.29
9 HT 42919	15	7 1/8	7	3.19	9 HT 42933	27	14 3/8	1	7	6.99
9 HT 42924	16	8	7	3.29	9 HT 42934	28	15 1/16	1	10	8.49
9 HT 42929	17	8 1/16	7	3.49	9 HT 42935	30	16 1/4	1	11	9.79
					9 HT 42936	32	16 7/8	1	13	10.19

Individual Combination Wrenches

ORDER INFO: See construction features and Warranty on opposite page.

Catalog Number	Size (in.)	Length (in.)	Wt. oz.	Price each	Catalog Number	Size (in.)	Length (in.)	Wt. lbs. oz.	Price each
9 HT 44699	1/4	3 1/16	3	\$1.79	9 HT 44701	3/4	9 5/8	9	\$3.49
9 HT 44691	5/16	4 1/8	3	1.89	9 HT 44702	13/16	10 9/16	10	3.89
9 HT 44692	11/16	4 1/2	3	2.09	9 HT 44703	7/8	11 1/2	11	4.39
9 HT 44693	3/2	5 1/4	3	2.39	9 HT 44704	15/16	12 1/2	14	4.59
9 HT 44694	7/8	5 1/2	4	2.49	9 HT 44705	1	13 1/2	1	5.29
9 HT 44695	1 1/16	6 1/8	5	2.69	9 HT 44706	1 1/16	14 3/8	1	6.89
9 HT 44696	9/16	7 1/8	5	2.89	9 HT 44707	1 1/8	15 3/8	1	7.79
9 HT 44697	5/8	8	7	2.99	9 HT 44708	1 1/4	16 7/8	1	12
9 HT 44698	11/16	8 5/16	7	3.19	9 HT 44709	1 3/16	18 1/4	1	15.89

CRAFTSMAN® Combination Open-end Socket-type Wrenches

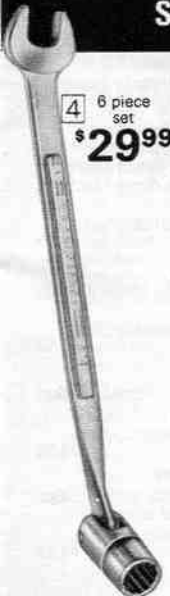

(4) 6-piece STANDARD Set
Separate prices total \$33.04.
Use open end in areas where you can get plenty of swing, or 12-point swivel socket end in constricted areas.
CONSTRUCTION: Molybdenum alloy steel. Heat-treated, then oil-quenched and tempered for uniform hardness. Nickel-chrome-plated to resist rust.
SET INCLUDES: 6 open-end, socket-type wrenches (3/8, 7/16, 1/2, 9/16, 5/8 and 3/4-in.). 7 1/16 to 10 5/16 in. long; pouch.
ORDER INFO: See Warranty on page 50.
9 HT 4255—Wt. 2 lbs. 3 oz. Set \$29.99

Individual Wrenches

SIZES. ORDERING INFORMATION:

Catalog Number	Size (in.)	Length (inches)	Shpg. wt.	Each
9 HT 42544	3/8	7 1/16	5 oz.	\$3.99
9 HT 42541	7/16	7 1/16	5 oz.	4.59
9 HT 42542	1/2	8 5/16	7 oz.	5.39
9 HT 42543	9/16	8 5/16	7 oz.	5.69
9 HT 42545	5/8	9 7/16	9 oz.	6.29
9 HT 42547	11/16	9 3/16	10 oz.	6.99
9 HT 42546	3/4	10 5/16	11 oz.	7.79

CRAFTSMAN® Ratcheting Box-end Wrenches in STANDARD or METRIC sizes

(5) 5-pc. STANDARD or METRIC Set
CONSTRUCTION: Made of chrome-plated steel. Lexan® polycarbonate shroud seals mechanism from dirt. 12-point openings for use on standard hex nuts and cap screws. Turn wrench over to reverse ratcheting direction.

5-piece STANDARD Set
Separate prices total \$17.85.
SET COMP.: Five ratcheting box-end wrenches (1/4x3/16, 3/8x7/16, 1/2x9/16, 5/8x1 1/16, 13/16x1 1/8-inch); pouch.
ORDERING INFORMATION: See Warranty on opposite page.
9 HT 4368—Wt. 2 lbs. 10 oz. Set \$16.99

Individual STANDARD Wrenches

SIZES. ORDERING INFORMATION:

Catalog Number	Size (in.)	Length (in.)	Wt. oz.	Each
9 HT 43681	1/4x3/16	4 3/4	5	\$2.69
9 HT 43682	3/8x7/16	6 3/8	8	2.99
9 HT 43683	1/2x9/16	7 3/8	9	3.69
9 HT 43684	5/8x1 1/16	8 3/8	11	3.99
9 HT 43685	13/16x1 1/8	10	15	4.49

5-piece METRIC Set
Separate prices total \$17.85.
SET COMP.: Five ratcheting box-end wrenches (6x8, 10x11, 12x13, 14x16 and 17x19mm); pouch.
ORDERING INFORMATION: See Warranty on opposite page.
9 HT 4369—Wt. 2 lbs. 10 oz. Set \$16.99

Individual METRIC Wrenches

SIZES. ORDERING INFORMATION:

Catalog Number	Size (mm)	Length (in.)	Wt. oz.	Each
9 HT 43691	6x8	4 3/4	5	\$2.69
9 HT 43692	10x11	6 3/8	7	2.99
9 HT 43693	12x13	7 3/8	9	3.69
9 HT 43694	14x16	8 3/8	11	3.99
9 HT 43695	17x19	10	15	4.49



CRAFTSMAN® Torque Wrenches

\$69⁹⁷

(1) Heavy-duty Wrench with direct-reading dial

Measures up to 250 ft.-lbs. or 35 meter-kilograms torque

FULL ONE YEAR WARRANTY ON CRAFTSMAN® DIAL INDICATING TORQUE WRENCH. If, within one year from the date of purchase, this CRAFTSMAN® Dial Indicating Torque Wrench fails due to a defect in material or workmanship, Sears will repair and/or recalibrate it, free of charge. Warranty service is available by simply returning torque wrench to the nearest Sears store throughout the U.S. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

CONSTRUCTION: Chrome-plated steel. 1/2-inch square drive for tough, industrial applications. Reversible. Direct-reading dial shows measurement in either direction. 2 1/2-in. dial has plastic lens. Slim drive end with high leverage extension. Includes protective case and instructions.

TORQUE RANGE: Measures from 0 to 250 ft.-lbs. or 35 meter-kilograms torque in both directions. Memory pointer shows highest torque reached until reset to zero. Measures accurately regardless of point of load application.

ORDERING INFORMATION: All torque wrenches require recalibration periodically.
9 HT 44442—Shpg. wt. 7 lbs. 7 oz. \$69.97

(2) Micro-adjusting Wrench lets you pre-set torque

Measures 10 to 150 ft.-lbs. or 1.4 to 20.75 meter-kilograms torque

FULL 90 DAY WARRANTY ON CRAFTSMAN MICRO-ADJUSTING TORQUE WRENCH: If within 90 days from the date of purchase, this Craftsman Micro-adjusting Torque Wrench fails due to a defect in material or workmanship, Sears will repair and/or recalibrate it free of charge.

LIMITED WARRANTY: After 90 days and until one year from date of purchase, Sears will repair any defect in material or workmanship in the torque wrench, free of charge. This warranty coverage does not include recalibration. Warranty service is available by simply returning the wrench to the nearest Sears store throughout the United States. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

CONSTRUCTION: Chrome-plated steel with texture grip handle. 1/2-in. square drive. Reversible ratchet. Push-button release. Patented snap-lock holds setting. Sealed mechanism. No gauges. Clicks when proper torque is reached.

TORQUE RANGE: Measures from 10 to 150 ft.-lbs. or 1.4 to 20.75 meter-kilograms torque in both directions.

ORDERING INFORMATION: All torque wrenches require recalibration periodically.
9 HT 44443—Shpg. wt. 3 lbs. 11 oz. \$49.97

Polyethylene Case for CRAFTSMAN Micro-adjusting Torque Wrench. (Not shown.)
9 HT 44462—Shpg. wt. 1 lb. 14 oz. \$5.47

(3) Beam-type Wrenches in three torque ranges

Measures 0 to 600 in.-lbs. or 0 to 70 Newton-meters*

FULL ONE YEAR WARRANTY ON CRAFTSMAN BEAM STYLE TORQUE WRENCHES. If this Craftsman Beam Style Torque Wrench fails to give complete satisfaction within one year from the date of purchase, return it to the nearest Sears store throughout the United States and Sears will replace it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

CONSTRUCTION: High strength, spring steel precision ground for accuracy. Chrome-plated steel with nylon handle that pivots for best work angle. Square drive. Guide charts. Measures in both directions.

TORQUE RANGES. ORDER INFO: All torque wrenches require recalibration periodically.

0 to 50 ft.-lbs. or 0 to 70 Newton-meters*, 3/8-inch square drive.

9 HT 44644—Wt. 1 lb. 8 oz. \$12.97

0 to 100 ft.-lbs. or 0 to 140 Newton-meters*, 1/2-inch square drive.

9 HT 44483—Wt. 2 lbs. 1 oz. \$14.97


0 to 150 ft.-lbs. or 0 to 200 Newton-meters*, 3/4-inch square drive.

9 HT 44642—Wt. 2 lbs. 2 oz. \$16.97

*Newton-meter is an international unit of measurement equal to .74 ft.-lbs. or 10m.-kg.

CRAFTSMAN®

1/4, 3/8 and 1/2-inch Drive Tools

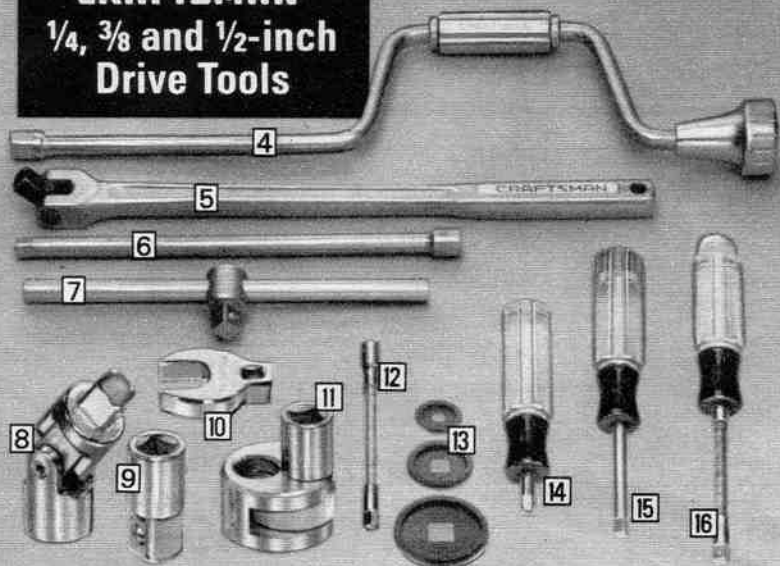

(4 thru 16) CRAFTSMAN® Ratchet Wrench Accessories

(4 thru 7)

CONSTRUCTION: Molybdenum alloy steel. Nickel-chrome plating resists rust.

(4) Speeder Wrenches

SIZES. ORDERING INFORMATION: See Warranty below.

Catalog Number	Square drive	Length	Shipping weight	Each
9 HT 4281	1/4-in.	15 1/2 in.	10 oz.	\$4.99
9 HT 4427	3/8-in.	16 in.	1 lb. 4 oz.	5.99
9 HT 4416	1/2-in.	18 in.	2 lbs. 1 oz.	6.99

*No center grip †With rotating center grip

(5) Flex Handles. Hinged-joint. Positive stops at 0° and 45°.

SIZES. ORDERING INFORMATION: See Warranty below.

Catalog Number	Square drive	Length	Shipping weight	Each
9 HT 43523	1/4-in.	6 in.	5 oz.	\$3.49
9 HT 44363	3/8-in.	10 in.	14 oz.	6.49
9 HT 44201	1/2-in.	15 in.	1 lb. 10 oz.	8.99
9 HT 44202	1/2-in.	18 in.	1 lb. 15 oz.	10.99
9 HT 4431	3/4-in.	18 in.	3 lbs.	16.99

(6) Extension Bars

Lock on to ratchet. Permits use of ratchet when there's only room for the socket. Added length eases work in tight places.

SIZES. ORDERING INFO: See Warranty below. See page 56 for 1-inch square drive extension bars.

Catalog Number	Square drive	Length	Shipping weight	Each
9 HT 43538	1/4-in.	1 1/2 in.	6 oz.	\$1.89
9 HT 43539	1/4-in.	3 in.	3 oz.	2.19
9 HT 43531	1/4-in.	6 in.	4 oz.	2.39
9 HT 43532	1/4-in.	14 in.	7 oz.	4.39
9 HT 43537	3/8-in.	1 1/2 in.	2 oz.	2.09
9 HT 44264	3/8-in.	3 in.	4 oz.	2.59
9 HT 44261	3/8-in.	6 in.	6 oz.	3.19
9 HT 44262	3/8-in.	10 in.	9 oz.	3.79
9 HT 44263	3/8-in.	20 in.	1 lb.	6.19
9 HT 43522	1/2-in.	2 in.	6 oz.	2.49
9 HT 44133	1/2-in.	3 in.	6 oz.	3.09
9 HT 44131	1/2-in.	6 in.	9 oz.	3.59
9 HT 44132	1/2-in.	10 in.	13 oz.	4.59
9 HT 44134	1/2-in.	20 in.	1 lb. 7 oz.	6.89
9 HT 4440	3/4-in.	5 in.	1 lb. 1 oz.	6.49
9 HT 4441	3/4-in.	8 in.	1 lb. 8 oz.	8.49
9 HT 4442	3/4-in.	16 in.	2 lbs. 12 oz.	10.79

(7) Slide-Bar Handle. Use as "T" or "L" handle to loosen connections.

SIZES. ORDERING INFORMATION: See Warranty below.

Catalog Number	Square drive	Length	Shipping weight	Each
9 HT 4354	1/4-in.	4 1/2 in.	4 oz.	\$3.39
9 HT 4428	3/8-in.	7 in.	10 oz.	4.19
9 HT 44152	1/2-in.	9 in.	1 lb.	4.59
9 HT 44151	1/2-in.	15 in.	1 lb. 6 oz.	7.19
9 HT 4443	3/4-in.	18 in.	4 lbs.	9.99

FULL UNLIMITED WARRANTY ON CRAFTSMAN® HAND TOOLS. If any Craftsman Hand Tool ever fails to give complete satisfaction, return it to the nearest Sears store throughout the U.S. and Sears will replace it free of charge. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

(8 thru 11)

CONSTRUCTION: Molybdenum alloy steel. Nickel-chrome plating resists rust.

(8) Universal Joints

Swing 90°. For tight places.

SIZES. ORDERING INFORMATION: See Warranty below.

Catalog No.	Size	Shpg. wt.	Each
9 HT 4280	1/4-in.	3 oz.	\$4.69
9 HT 4435	3/8-in.	4 oz.	4.99
9 HT 4425	1/2-in.	7 oz.	4.99

(9) Socket Adapters

Change square drive size to another.

SIZES. ORDERING INFORMATION: See Warranty below, left.

Catalog Number	Drive size	Converts to	Wt. oz.	Each
9 HT 4256	3/8-in.	1/4-in.	3	\$2.19
9 HT 4257	1/2-in.	3/8-in.	3	2.09
9 HT 4258	3/8-in.	1/2-in.	4	2.39
9 HT 4259	1/2-in.	3/4-in.	4	2.59
9 HT 4271	1/2-in.	3/4-in.	6	3.49

(10) Crowfoot Wrenches. Use with 3/8-in. sq. drive. For tight places.

SIZES. ORDERING INFORMATION: See Warranty below, left.

9 HT 43611	1/4-in.	Wt. 3 oz.	\$2.69
9 HT 43621	3/8-in.	Wt. 3 oz.	2.79
9 HT 43622	1/2-in.	Wt. 3 oz.	2.99
9 HT 43623	3/4-in.	Wt. 3 oz.	3.09
9 HT 43624	1-in.	Wt. 4 oz.	3.29
9 HT 43625	1 1/4-in.	Wt. 4 oz.	3.39
9 HT 43626	1 1/2-in.	Wt. 4 oz.	3.49
9 HT 43627	1 3/4-in.	Wt. 4 oz.	3.79
9 HT 43628	2-in.	Wt. 5 oz.	3.99
9 HT 43629	2 1/4-in.	Wt. 6 oz.	4.19

(11) Stud Remover. Capacity of 3/8 to 1/2-in. 1/2-inch square drive.

ORDERING INFO: See Warranty below.
9 HT 4457—Wt. 14 oz. \$9.39

(12) Flex Extension. Flexible cable. 1/4-inch square drive. 4 in. long.

ORDERING INFO: See Warranty below.
9 HT 4336—Wt. 3 oz. \$3.09

(13) Ratchet Speeder Adapters

Steel with rust-resistant finish. Fit between ratchet and socket. Set of three for 1/4, 3/8 and 1/2-inch square drive ratchets. With plastic pouch.

ORDERING INFO: See Warranty below.
9 HT 44191—Wt. 4 oz. Set \$2.99

(14) Handle Extension

1/4-inch square drive. 4 1/2 inches long. Plastic handle.

ORDERING INFO: See Warranty, left.
9 HT 43351—Wt. 5 oz. \$2.59

(15) Socket Extension


For 1/4-inch sq. drive. 1/4-in. female socket in top of plastic handle, 6 in. long.

ORDERING INFO: See Warranty, left.
9 HT 43371—Wt. 6 oz. \$3.09

(16) 6-inch Flex Spinner

For 1/4-in. sq. drive sockets and fittings. Flexible steel cable. Plastic handle.

ORDERING INFO: See Warranty, left.
9 HT 4355—Wt. 5 oz. \$4.39

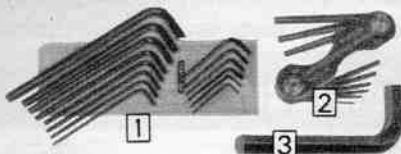

CRAFTSMAN® Hex Key Wrench Sets

CONSTRUCTION: Steel; rust-resistant finish. Chamfered ends. Sizes stamped into shanks. Pouch with Sets (1).

(1) 14-piece STANDARD Short/Long-arm Set

SHORT-ARM SIZES: .050, 1/16, 3/32, 7/64, 1/8-in.

LONG-ARM SIZES: 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16-in.

ORDER INFO: See Warranty at right. 9 HT 46683—Wt. 11 oz.Set \$2.99

11-pc. STANDARD Short-arm Set

SIZES: .050, 1/16, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32 and 1/4-in.

ORDER INFO: See Warranty at right. 9 HT 46693—Wt. 6 oz.Set \$1.99

9-pc. STANDARD Long-arm Set

SIZES: 7/64, 1/8, 9/64, 5/32, 3/16, 7/32 and 1/4-in.

ORDER INFO: See Warranty at right. 9 HT 46673—Wt. 8 oz.Set \$1.99

14-pc. METRIC Short/Long-arm Set

SHORT-ARM SIZES: 2, 2.5, 3, 4, 5, 6mm.

LONG-ARM SIZES: 2, 2.5, 3, 4, 5, 6, 7 and 8mm.

ORDER INFO: See Warranty at right. 9 HT 46609—Wt. 1 lb. 6 oz.Set \$3.99

10-piece METRIC Long-arm Set

SIZES: 2, 2.5, 3, 4, 5, 6, 7, 8, 9, 10mm.

ORDER INFO: See Warranty at right. 9 HT 46676—Wt. 1 lb. 4 oz.Set \$3.49

8-piece METRIC Long-arm Set

SIZES: 2, 2.5, 3, 4, 5, 6, 8, 10mm.

ORDER INFO: See Warranty at right. 9 HT 46675—Wt. 14 oz.Set \$2.99

(2) 9-in-1 Hex Key Wrench Sets

SIZES: 9 sizes (3/64 thru 1/4-in).

ORDER INFO: Not Craftsman. 9 HT 46282—Wt. 8 oz.Set \$2.39

SIZES: 9 sizes (.050 thru 3/16-in).

ORDER INFO: Not Craftsman. 9 HT 46281—Wt. 6 oz.Set \$2.09

(3) METRIC Drain Plug Wrenches

SIZES, ORDERING INFORMATION:

17mm Drain Plug Wrench

9 HT 46666—Wt. 1 lb. 1 oz.\$3.99

12mm Drain Plug Wrench

9 HT 46667—Wt. 7 oz.3.49

Hex key Wrenches
Save 10%
when you buy 5 or more

Individual CRAFTSMAN Hex Key Wrenches

SIZES, ORDER INFO: See construction features and Warranty above.

STANDARD Short-arm Wrenches

Catalog Number	Size, in.	Wt. oz.	Each	Price when you buy 5 or more Each
9 HT 28131	.050	1	25c	22c
9 HT 28132	1/16	1	25c	22c
9 HT 28133	3/32	1	25c	22c
9 HT 28134	7/64	1	25c	22c
9 HT 28182	1/8	1	25c	22c
9 HT 28135	9/64	1	25c	22c
9 HT 28181	5/32	1	25c	22c
9 HT 28136	3/16	1	25c	22c
9 HT 28137	7/32	2	25c	22c
9 HT 28138	1/4	2	25c	22c

STANDARD Long-arm Wrenches

Catalog Number	Size, (in.)	Wt. oz.	Each	Price when you buy 5 or more Each
9 HT 28161	5/64	1	25c	22c
9 HT 28171	3/32	1	25c	22c
9 HT 28185	7/64	1	25c	22c
9 HT 28172	1/8	1	25c	22c
9 HT 28186	9/64	1	25c	22c
9 HT 28173	5/32	2	25c	22c
9 HT 28174	3/16	2	25c	22c
9 HT 28175	7/32	3	39c	35c
9 HT 28176	1/4	3	39c	35c
9 HT 28177	5/16	5	69c	62c
9 HT 28178	3/8	7	79c	71c
9 HT 28179	1/2	12	\$1.89	\$1.70

You'll never have to pay for replacing a CRAFTSMAN® Quick-release Ratchet Wrench

FULL UNLIMITED WARRANTY ON CRAFTSMAN HAND TOOLS. If any Craftsman Hand Tool ever fails to give complete satisfaction, return it to the nearest Sears store throughout the United States and Sears will replace it, free of charge. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

Here's what makes these CRAFTSMAN Ratchet Wrenches so outstanding:

- CRAFTSMAN Ratchets were operated over 1/2 million times in actual lab tightening tests without serious wear. They're tough to break because they're made tough.
- CRAFTSMAN Ratchets are made from a select molybdenum alloy steel—specially chosen for its overall strength and ability to resist brittleness when tempered. This alloy gives our ratchets the toughness needed to loosen stubborn nuts and bolts.
- CRAFTSMAN Ratchets are drop-forged. This drop-forging process increases strength of our ratchets at points of stress.
- CRAFTSMAN Ratchets are heat-treated, then oil-quenched and tempered to uniformly "through-harden" them so there are no inner soft spots.
- CRAFTSMAN Ratchets are nickel-chrome plated to add rust and corrosion resistance . . . you'll get tough tools with a bright finish.
- CRAFTSMAN Ratchets feature a quick-release button. Just press release button on top of ratchet head and even tight, greasy sockets slip off easily . . . no hard pulling or prying.
- CRAFTSMAN Ratchets feature a reversing lever that changes ratchet direction instantly

(4) thru (6) Quick-release Reversible Ratchets

CONSTRUCTION: Drop-forged molybdenum alloy steel. Nickel-chrome plating adds rust and corrosion resistance. In lab tightening tests, CRAFTSMAN ratchets were operated over 1/2 million times without serious wear.

(4) Fine-tooth Ratchet Wrenches

RELEASE, REVERSING CONTROLS: Quick-release button releases sockets instantly without hard pulling or prying. Reversing lever changes ratchet direction instantly. Built-in knurled speeder makes rapid spin down of nuts and bolts easy.

SIZES, ORDERING INFORMATION:

Catalog Number	Square drive	Length inches	Number of teeth	Wt. lbs. oz.	Each
9 HT 43178	1/4-in.	5 1/4	70	6	\$8.99
9 HT 43788	3/8-in.	6 7/8	82	11	11.99
9 HT 44978	1/2-in.	10 3/4	90	1	14.99

(5) Flex-head Ratchet Wrenches

RELEASE, REVERSING CONTROLS: Adjusts from 0° to 90° for easier operation. Quick-release button. Reversing lever for hard to get at work areas.

SIZES, ORDERING INFORMATION:

Catalog Number	Square drive	Length inches	Number of teeth	Wt. lbs. oz.	Each
9 HT 42791	3/8-in.	11 1/4	24	2	\$11.99
9 HT 44974	1/2-in.	16 3/4	32	1	17.99

(6) Regular-head Ratchet Wrenches

RELEASE, REVERSING CONTROLS: Quick-release button releases tight or greasy sockets without hard pulling or prying. Reversing lever changes ratchet direction.

SIZES, ORDERING INFORMATION: See page 56 for 1-in. square drive ratchets.

Catalog Number	Square drive	Length inches	Number of teeth	Wt. lbs. oz.	Each
9 HT 43175	1/4-in.	5 1/4	24	6	\$8.99
9 HT 43785	3/8-in.	6 7/8	24	11	8.99
9 HT 44975	1/2-in.	10 3/4	32	1	6 11.99
9 HT 44976	1/2-in.	15	32	1	13 14.49
9 HT 44801	3/4-in.	19 3/4	24	5	11 36.99



Fine-tooth Ratchet is great for fast work in tight places because a handle movement of only 4° will turn a socket

Low as **\$8.99**

1/4-inch square drive

Flex-head Ratchet adjusts from 0° to 90° for easier operation

Low as **\$11.99**

3/8-in. sq. drive

Regular-head Ratchet

Low as **\$6.99**

1/4-inch square drive



Equip your tool set with CRAFTSMAN® Metric Tools and be prepared to repair and service cars, bikes and appliances with metric components

Measurements in meters and kilograms are increasing among United States manufacturers as this country prepares its conversion to the International System of Measurement.

Film specifications and medical prescriptions are familiar applications of metric measurement, but a number of other industries have also begun a conversion to metric equivalents. More than 11 million foreign cars on American highways require metric tools for servicing. Soon domestic automobiles as well as import models will require the use of metric tools for proper servicing. The Ford Pinto and Mustang II 2.3-litre engines are designed with metric fasteners. The Chevrolet Chevette is built primarily with metric specifications and will require the use of metric wrenches to service it properly.

In a few years the metric conversion should be well underway with the leading automobile manufacturers as the majority of their models are produced with metric parts. (Along with this conversion, kilometers will be replacing miles on most road signs and speed limits will be posted in kilometers-per-hour.) Metric tools will also be needed to service an increased flow of foreign-made products such as bicycles, motorcycles and snowmobiles.

In order to help you service these units, Sears offers CRAFTSMAN tools in metric sizes. In this catalog you will find METRIC Wrenches on pages 49 thru 53; METRIC Sockets on pages 54 thru 56; METRIC Socket and Wrench Sets on pages 57 thru 59; Mechanics' Tool Sets with METRIC components on pages 59, 60, 64, 65, 66 and 67; METRIC Tap and Die Sets on pages 88 and 89; and METRIC Drill Bits on page 118.

Whether you're working on your car, bike, or repairing an appliance, CRAFTSMAN Tools will be ready to help you do the job.

**Make Sears Your
METRIC HEADQUARTERS**

CRAFTSMAN® Individual Sockets

CRAFTSMAN® Sockets
Full Unlimited Warranty. If any CRAFTSMAN Socket ever fails to give complete satisfaction, return it to the nearest Sears store throughout the United States and Sears will replace it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Choose 6, 8, or
12-point Sockets

6-POINT: Use on hex nuts and bolts. Heavier walls. Grip rounded corners.

8-POINT: For square nuts only. Ideal for use on farm machinery and refrigeration equipment.

12-POINT: For use on standard hex nuts and cap screws. More turning positions than 6 or 8-point sockets.



1/4-INCH SQUARE DRIVE



REGULAR-DEPTH

Excellent for radio, refrigerator and electronic work



DEEP

Ideal for use in hard-to-reach places, and nuts with over-protruding bolts.

10-pc. STANDARD Socket Sets ... choose regular-depth or deep

SET COMPOSITION: Nine 6-pt. sockets (3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2-inch); metal tray.

DEPTH, ORDERING INFORMATION: See Warranty above and construction features on opposite page.

Regular-depth
9 HT 44453—Wt. 8 oz.Set \$8.99

Deep. Separate prices total \$17.91.
9 HT 44454—Wt. 14 oz.Set \$12.99

Individual STANDARD Sockets

ORDER INFO: See Warranty above and construction features p. 55.

STANDARD, Regular-depth

Cat. No.	Drive	In.	Pts.	Wt.	Each
9 HT 43481	1/4	5/32	6	2 oz.	.99c
9 HT 43491	1/4	3/16	6	2 oz.	.99c
9 HT 43492	1/4	7/32	6	2 oz.	.99c
9 HT 43493	1/4	1/4	6	2 oz.	.99c
9 HT 43494	1/4	9/32	6	2 oz.	.99c
9 HT 43495	1/4	5/16	6	2 oz.	.99c
9 HT 43496	1/4	11/32	6	2 oz.	.99c
9 HT 43497	1/4	3/8	6	3 oz.	.99c
9 HT 43498	1/4	7/16	6	3 oz.	.99c
9 HT 43499	1/4	1/2	6	3 oz.	.99c
9 HT 43808	1/4	5/16	12	2 oz.	.99c
9 HT 43809	1/4	7/32	12	2 oz.	.99c
9 HT 43801	1/4	1/4	12	2 oz.	.99c
9 HT 43802	1/4	9/32	12	2 oz.	.99c
9 HT 43803	1/4	5/16	12	2 oz.	.99c
9 HT 43804	1/4	11/32	12	2 oz.	.99c
9 HT 43805	1/4	3/8	12	2 oz.	.99c
9 HT 43806	1/4	7/16	12	3 oz.	.99c
9 HT 43807	1/4	1/2	12	3 oz.	.99c

STANDARD, Deep

Cat. No.	Drive	Inches	Pts.	Wt.	Each
9 HT 43571	1/4	3/16	6	3 oz.	\$1.99
9 HT 43572	1/4	7/32	6	3 oz.	1.99
9 HT 43573	1/4	1/4	6	3 oz.	1.99
9 HT 43574	1/4	9/32	6	3 oz.	1.99
9 HT 43575	1/4	5/16	6	3 oz.	1.99
9 HT 43576	1/4	11/32	6	3 oz.	1.99
9 HT 43577	1/4	3/8	6	3 oz.	1.99
9 HT 43578	1/4	7/16	6	3 oz.	1.99
9 HT 43589	1/4	1/2	6	4 oz.	1.99

10-pc. METRIC Socket Sets ... choose regular-depth or deep

SET COMPOSITION: Nine 6-point sockets (4, 5, 6, 7, 8, 9, 10, 11 and 12mm); metal tray.

DEPTH, ORDERING INFORMATION: See Warranty above and construction features on opposite page.

Regular-depth
9 HT 44455—Wt. 8 oz.Set \$8.99

Deep. Separate prices total \$17.91.
9 HT 44437—Wt. 14 oz.Set \$12.99

Individual METRIC Sockets

United States manufacturers are beginning to use more metric components in their products. You'll be prepared to service and repair those products with these metric sockets.

ORDERING INFORMATION: See Warranty above and construction features on opposite page.

METRIC, Regular depth

Catalog Number	Drive	Size	Points	Wt. oz.	Each
9 HT 43505	1/4	4mm	6	2	.99c
9 HT 43501	1/4	5mm	6	2	.99c
9 HT 43502	1/4	6mm	6	2	.99c
9 HT 43503	1/4	7mm	6	2	.99c
9 HT 43504	1/4	8mm	6	2	.99c
9 HT 43507	1/4	9mm	6	2	.99c
9 HT 43508	1/4	10mm	6	3	.99c
9 HT 43509	1/4	11mm	6	3	.99c
9 HT 43513	1/4	12mm	6	3	.99c

METRIC, Deep

Catalog Number	Drive	Size	Points	Wt. oz.	Each
9 HT 44401	1/4	4mm	6	3	\$1.99
9 HT 44402	1/4	5mm	6	3	1.99
9 HT 44403	1/4	6mm	6	3	1.99
9 HT 44404	1/4	7mm	6	3	1.99
9 HT 44405	1/4	8mm	6	3	1.99
9 HT 44406	1/4	9mm	6	3	1.99
9 HT 44407	1/4	10mm	6	3	1.99
9 HT 44408	1/4	11mm	6	3	1.99
9 HT 44409	1/4	12mm	6	4	1.99
9 HT 44411	1/4	13mm	6	5	1.99
9 HT 44412	1/4	14mm	6	4	1.99



(1) Phillips-type Bits

SIZES, ORDER INFO: 1/4-inch square drive. 1 1/2-in. long.

9 HT 42681—No. 1. Wt. 3 oz. ...\$2.89
9 HT 42682—No. 2. Wt. 3 oz.2.89

(2) Slotted Screwdriver Bits

SIZES, ORDER INFO: 1/4-inch square drive. 1 1/2-in. long.

Shipping weight 3 ounces.
9 HT 42691—.030x1/4-in.\$2.69
9 HT 42692—.039x1/4-in.2.69

(3) Hex Setscrew Bits for Socket Wrenches

SIZES, ORDER INFO: 1/4-in. sq. drive. 1 1/2 inches long. Wt. 3 oz.

9 HT 42701—3/16-in.\$2.49
9 HT 42702—7/32-in.2.49

9 HT 42703—1/4-in.2.49
3/8-in. Shipping weight 4 oz.


9 HT 42704.....\$2.49
3/8-in. Shipping weight 4 oz.

9 HT 42705.....\$2.49

and Sets in STANDARD or METRIC Sizes

CRAFTSMAN® Sockets are not only tough . . .
they help make your job easier, too

- Chamfered ends allow socket to slide over nuts easily
- No-shoulder design so socket grips nut at full depth
- Molybdenum alloy steel—specially chosen for its overall toughness. Heat-treated, then oil quenched and tempered for uniform hardness
- Nickel-chrome plating adds rust and corrosion resistance
- Metric sockets (except flexible) have a knurled band so you can easily distinguish them from standard sockets



3/8-in. Sq. Drive Flexible Sockets

3/8-INCH SQUARE DRIVE

REGULAR DEPTH

Ideal for work on cars and lawn mowers. Excellent for home use.

DEEP

Ideal for spark plugs. Spring "U"-bolts, etc. Reach nuts with over protruding bolts.

STANDARD, METRIC Sets

9-pc. STANDARD Regular-depth Sets with 6 or 12-pt. openings
SET COMPOSITION: Eight sockets (3/8, 7/16, 1/2, 5/8, 11/16, 3/4, 13/16-in.); metal tray.

ORDER INFO: See Warranty on page 54, construction features above. *Separate prices total \$13.42.*

9-pc. Set with 6-pt. openings.
9 HT 44456—Wt. 1 lb.Set \$11.99

9-pc. Set with 12-pt. openings.
9 HT 4389—Wt. 1 lb.Set \$11.99

10-pc. STANDARD Deep Set
SET COMPOSITION: Nine 6-pt. deep sockets (3/8, 7/16, 1/2, 5/8, 11/16, 3/4, 13/16, 7/8-in.); metal tray.

ORDER INFO: See Warranty on page 54, construction features above. *Separate prices total \$22.31.*

9 HT 43156—Wt. 2 lbs. 4 oz. . . .Set \$16.99

9-pc. METRIC Regular-depth Sets with 6 or 12-pt. openings

SET COMPOSITION: Eight sockets (sizes 9, 10, 12, 13, 14, 15, 17 and 19mm); metal tray.

ORDER INFO: See Warranty on page 54, construction features above. *Separate prices total \$13.72.*

9-pc. Set with 6-pt. openings.
9 HT 4342—Wt. 13 oz.Set \$11.99

9-pc. Set with 12-pt. openings.
9 HT 4347—Wt. 13 oz.Set \$11.99

10-pc. METRIC Deep Set

SET COMPOSITION: Nine 6-pt. deep sockets (sizes 9, 10, 11, 12, 13, 14, 15, 17 and 19mm); metal tray.

ORDER INFO: See Warranty on page 54, construction features above. *Separate prices total \$22.31.*

9 HT 44438—Wt. 1 lb. 13 oz. . . .Set \$16.99

Individual STANDARD Sockets

ORDERING INFORMATION: See Craftsman Full Unlimited Warranty on opposite page. Construction features are described above.

STANDARD, Regular-depth

Catalog No.	Drive	In.	Pts.	Wt.	Each
9 HT 43001	3/8	3/8	6	3 oz.	\$1.59
9 HT 43002	3/8	7/16	6	3 oz.	1.59
9 HT 43003	3/8	1/2	6	3 oz.	1.59
9 HT 43004	3/8	5/8	6	3 oz.	1.69
9 HT 43005	3/8	11/16	6	3 oz.	1.69
9 HT 43006	3/8	3/4	6	4 oz.	1.69
9 HT 43007	3/8	13/16	6	4 oz.	1.79
9 HT 43008	3/8	7/8	6	4 oz.	1.79
9 HT 44341	3/8	1/4	8	3 oz.	1.59
9 HT 44342	3/8	5/16	8	3 oz.	1.59
9 HT 44343	3/8	3/8	8	3 oz.	1.59
9 HT 44344	3/8	7/16	8	3 oz.	1.59
9 HT 44345	3/8	1/2	8	3 oz.	1.59
9 HT 44331	3/8	3/8	12	3 oz.	1.59
9 HT 44332	3/8	7/16	12	3 oz.	1.59
9 HT 44333	3/8	1/2	12	3 oz.	1.59
9 HT 44334	3/8	5/8	12	3 oz.	1.69
9 HT 44335	3/8	11/16	12	3 oz.	1.69
9 HT 44336	3/8	3/4	12	4 oz.	1.69
9 HT 44337	3/8	13/16	12	4 oz.	1.79
9 HT 44338	3/8	7/8	12	4 oz.	1.79

STANDARD, Deep

Catalog No.	Drive	Inches	Points	Wt.	Each
9 HT 43301	3/8	3/8	12	4 oz.	\$1.99
9 HT 43311	3/8	7/16	12	4 oz.	2.09
9 HT 43312	3/8	1/2	12	4 oz.	2.19
9 HT 43313	3/8	5/8	12	4 oz.	2.39
9 HT 43314	3/8	11/16	12	5 oz.	2.49
9 HT 43316	3/8	3/4	12	5 oz.	2.59
9 HT 43317	3/8	13/16	12	5 oz.	2.69
9 HT 43318	3/8	7/8	12	7 oz.	2.89
9 HT 43319	3/8	1	12	7 oz.	2.99
9 HT 43333	3/8	3/8	6	4 oz.	1.99
9 HT 43331	3/8	7/16	6	4 oz.	2.09
9 HT 43332	3/8	1/2	6	4 oz.	2.19
9 HT 43334	3/8	5/8	6	4 oz.	2.39
9 HT 43335	3/8	11/16	6	5 oz.	2.49
9 HT 43336	3/8	3/4	6	5 oz.	2.59
9 HT 43337	3/8	13/16	6	6 oz.	2.69
9 HT 43338	3/8	7/8	6	7 oz.	2.89
9 HT 43339	3/8	1	6	8 oz.	2.99

Individual METRIC Sockets

ORDERING INFO: See Warranty on page 54, construction features above.

METRIC, Regular-depth

Catalog No.	Drive	Size	Pts.	Wt.	Each
9 HT 43541	3/8	9mm	6	3 oz.	\$1.59
9 HT 43542	3/8	10mm	6	3 oz.	1.59
9 HT 43543	3/8	11mm	6	3 oz.	1.69
9 HT 43544	3/8	12mm	6	3 oz.	1.69
9 HT 43545	3/8	13mm	6	3 oz.	1.69
9 HT 43546	3/8	14mm	6	3 oz.	1.79
9 HT 43547	3/8	15mm	6	3 oz.	1.79
9 HT 43548	3/8	17mm	6	4 oz.	1.79
9 HT 43549	3/8	19mm	6	4 oz.	1.79
9 HT 44301	3/8	9mm	12	3 oz.	1.59
9 HT 44302	3/8	10mm	12	3 oz.	1.59
9 HT 44303	3/8	11mm	12	3 oz.	1.69
9 HT 44304	3/8	12mm	12	3 oz.	1.69
9 HT 44305	3/8	13mm	12	3 oz.	1.69
9 HT 44306	3/8	14mm	12	3 oz.	1.79
9 HT 44307	3/8	15mm	12	3 oz.	1.79
9 HT 44308	3/8	17mm	12	4 oz.	1.79
9 HT 44309	3/8	19mm	12	4 oz.	1.79

METRIC, Deep

Catalog No.	Drive	Size	Pts.	Wt.	Each
9 HT 44425	3/8	9mm	6	4 oz.	\$1.99
9 HT 44426	3/8	10mm	6	4 oz.	2.09
9 HT 44427	3/8	11mm	6	4 oz.	2.19
9 HT 44428	3/8	12mm	6	4 oz.	2.39
9 HT 44429	3/8	13mm	6	5 oz.	2.49
9 HT 44431	3/8	14mm	6	5 oz.	2.49
9 HT 44432	3/8	15mm	6	5 oz.	2.69
9 HT 44433	3/8	16mm	6	5 oz.	2.79
9 HT 44434	3/8	17mm	6	5 oz.	2.99
9 HT 44435	3/8	18mm	6	5 oz.	2.99
9 HT 44436	3/8	19mm	6	6 oz.	2.99
9 HT 44413	3/8	9mm	12	4 oz.	1.99
9 HT 44414	3/8	10mm	12	4 oz.	2.09
9 HT 44415	3/8	11mm	12	4 oz.	2.19
9 HT 44416	3/8	12mm	12	4 oz.	2.39
9 HT 44417	3/8	13mm	12	6 oz.	2.49
9 HT 44418	3/8	14mm	12	6 oz.	2.49
9 HT 44419	3/8	15mm	12	5 oz.	2.69
9 HT 44421	3/8	16mm	12	5 oz.	2.69
9 HT 44422	3/8	17mm	12	5 oz.	2.89
9 HT 44423	3/8	18mm	12	5 oz.	2.99
9 HT 44424	3/8	19mm	12	6 oz.	2.99

STANDARD Flexible Sockets

8-pc. STANDARD Socket Sets . . . choose 6 or 12-pt. openings

Flexible sockets are ideal for getting into hard-to-reach areas.

SET COMPOSITION: Seven sockets (sizes 3/8, 7/16, 1/2, 5/8, 11/16, 3/4-in.); Permanex® plastic case.

ORDER INFO: See Warranty on page 54, construction features above. *Separate prices total \$34.23.*

8-pc. Set with 6-pt. openings.
9 HT 43811—Wt. 1 lb. 5 oz. . . .Set \$24.99

8-pc. Set with 12-pt. openings.
9 HT 43812—Wt. 1 lb. 5 oz. . . .Set \$24.99

Individual STANDARD Sockets

ORDERING INFO: See warranty on page 54, construction features above.

Catalog No.	Drive	In.	Pts.	Wt.	Each
9 HT 43252	3/8	3/8	12	4 oz.	\$4.89
9 HT 43253	3/8	7/16	12	4 oz.	4.89
9 HT 43254	3/8	1/2	12	4 oz.	4.89
9 HT 43255	3/8	5/8	12	4 oz.	4.89
9 HT 43256	3/8	11/16	12	4 oz.	4.89
9 HT 43257	3/8	3/4	12	4 oz.	4.89
9 HT 43258	3/8	13/16	12	4 oz.	4.89
9 HT 43259	3/8	7/8	12	4 oz.	4.89
9 HT 43260	3/8	1	12	4 oz.	4.89
9 HT 43261	3/8	3/8	6	4 oz.	4.89
9 HT 43262	3/8	7/16	6	4 oz.	4.89
9 HT 43263	3/8	1/2	6	4 oz.	4.89
9 HT 43264	3/8	5/8	6	4 oz.	4.89
9 HT 43265	3/8	11/16	6	4 oz.	4.89
9 HT 43266	3/8	3/4	6	4 oz.	4.89
9 HT 43267	3/8	13/16	6	4 oz.	4.89

METRIC Flexible Sockets

11-pc. METRIC Socket Set with 6-point openings

More and more manufacturers are using metric fasteners in their products . . . you'll be ready to repair and service those products with these sockets. Flexible sockets are ideal for getting into hard-to-reach areas.

SET COMPOSITION: Ten 6-pt. sockets (sizes 10, 11, 12, 13, 14, 15, 16, 17, 18, 19mm); metal tray.

ORDER INFO: See Warranty on page 54, construction features above. *Separate prices total \$48.90.*

9 HT 44459—Wt. 2 lbs. 2 oz. . . .Set \$29.99

Individual METRIC Sockets

ORDERING INFO: See Warranty on page 54, construction features above.

Catalog Number	Drive	Size	Pts.	Shpg. wt.	Each
9 HT 43268	3/8	10mm	6	4 oz.	\$4.89
9 HT 43269	3/8	11mm	6	4 oz.	4.89
9 HT 43271	3/8	12mm	6	4 oz.	4.89
9 HT 43272	3/8	13mm	6	4 oz.	4.89
9 HT 43273	3/8	14mm	6	4 oz.	4.89
9 HT 43274	3/8	15mm	6	4 oz.	4.89
9 HT 43275	3/8	16mm	6	4 oz.	4.89
9 HT 43276	3/8	17mm	6	4 oz.	4.89
9 HT 43277	3/8	18mm	6	4 oz.	4.89
9 HT 43278	3/8	19mm	6	4 oz.	4.89

Sears Has a Credit Plan to Suit Most Every Need See Big Book or ask for details

(4) Phillips-type Bits

SIZES, ORDER INFO:
2 1/4 inches long. 3/8-in. drive.
9 HT 44371—No. 2. Wt. 4 oz. . . . \$2.99
9 HT 44372—No. 3. Wt. 4 oz. . . . 2.99
9 HT 44373—No. 4. Wt. 4 oz. . . . 2.99

(6) Slotted Screwdriver Bits

SIZES, ORDER INFO:
1 1/8-in. long. 3/8-in. drive. Wt. 4 oz.
9 HT 42851—.030x1/8-in. . . . \$2.89
9 HT 42852—.039x3/16-in. . . . 2.89
9 HT 42853—.055x3/8-in. . . . 2.89

(5) Hex Setscrew Bits

SIZES, ORDERING INFORMATION:
1 1/8 inches long. 3/8-in. drive.
3/32, 7/16, 1/2-in. (Wt. 3 oz.); 1/4, 5/16, 3/8-in. (Wt. 4 oz.).
9 HT 46669—.39-in. . . . \$2.39
9 HT 46681—.51-in. . . . 2.39
9 HT 46682—.72-in. . . . 2.39
9 HT 46683—.94-in. . . . 2.39
9 HT 46684—1.16-in. . . . 2.39
9 HT 46685—1.38-in. . . . 2.39



(7) 3/8-in. drive Spark Plug Sockets

SIZES, ORDER INFO:
1 1/8-in. Wt. 6 oz.
9 HT 43321 \$2.99
3/8-in. Wt. 5 oz.
9 HT 43326 \$2.99

Extra Rubber Insert. For 1 1/8-in. sockets.
9 HT 44246—Wt. 3 oz. . . . 19c

(8) 3/8-in. drive Flexible Spark Plug Sockets

SIZES, ORDER INFO:
1 1/8-in. flexible. Wt. 7 oz.
9 HT 43323 \$6.19
3/8-in. flexible. Wt. 6 oz.
9 HT 43322 \$6.19

Extra Rubber Insert. For 3/8-in. sockets.
9 HT 44247—Wt. 3 oz. . . . 19c



CRAFTSMAN® Sockets in STANDARD or METRIC Sizes... 1/2, 3/4-in. drive

CONSTRUCTION: Molybdenum alloy steel—specially chosen for its overall toughness. Heat-treated, then oil-quenched, tempered for uniform hardness. Nickel-chrome plating adds rust, corrosion resistance. Chamfered ends allow socket to slide over nuts easily. No-shoulder design allows socket to grip nut at full depth.


Full Unlimited Warranty on CRAFTSMAN Sockets: If any CRAFTSMAN Socket fails to give complete satisfaction, return it to nearest Sears store throughout the United States. Sears will replace it, free of charge. This warranty gives you specific legal rights, you may also have other rights which vary from state to state.

1/2-INCH SQUARE DRIVE



STANDARD Depth

DEEP...
Ideal for use
on Spring "U"
bolts, etc.
Reach nuts with
over-protruding
bolts

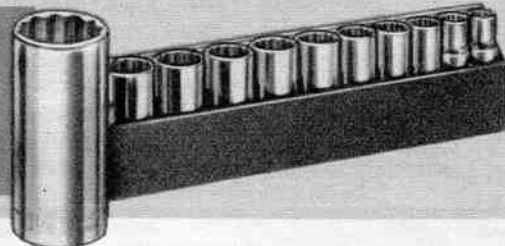

14-piece STANDARD Sets

Regular depth with
6 or 12-pt. openings **\$26.99** set

SET COMPOSITION: 13 sockets (7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1 1/16, 1 1/8 and 1 1/4 inches); metal tray.

ORDERING INFORMATION: See construction features and Warranty above.

6-pt. openings. Separate prices total \$31.57.

9 HT 44457—Wt. 3 lbs. 13 oz.Set \$26.99

12-pt. openings. Sep. prices total \$31.57.

9 HT 43482—Wt. 3 lbs. 14 oz.Set \$26.99

12-piece Deep STANDARD Set

12-pt. openings **\$29.99** set

SET COMPOSITION: Eleven deep sockets with 12-pt. openings (1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1 1/16, 1 1/8-inch); metal tray.

ORDERING INFORMATION: See construction features, Warranty above. Separate prices total \$35.79.

Shipping weight 5 pounds 2 ounces.
9 HT 44458Set \$29.99

9-piece METRIC Sets

Regular-depth with
6 or 12-pt. openings **\$14.99** set

SET COMPOSITION: Eight sockets (9, 10, 12, 13, 14, 15, 17, 19-mm.); metal tray.

ORDERING INFORMATION: See construction features, Warranty above.

6-pt. openings.

Separate prices total \$17.12.

9 HT 4343—Wt. 1 lb. 7 oz.Set \$14.99

12-pt. openings.

Separate prices total \$16.82.

9 HT 43484—Wt. 1 lb. 5 oz.Set \$14.99

METRIC, Regular-depth Sockets

More metric products are entering the marketplace daily. You'll be ready to repair and service those products with these sockets.

ORDERING INFO: See construction features and Warranty above.

Catalog Number	Drive	mm	Pts.	Wt. oz.	Each
9 HT 44251	1/2	9	6	4	\$1.99
9 HT 44252	1/2	10	6	4	1.99
9 HT 44253	1/2	11	6	4	1.99
9 HT 44254	1/2	12	6	4	1.99
9 HT 44255	1/2	13	6	4	2.19
9 HT 44256	1/2	14	6	4	2.19
9 HT 44257	1/2	15	6	4	2.19
9 HT 44258	1/2	17	6	4	2.29
9 HT 44259	1/2	19	6	5	2.29
9 HT 44265	1/2	22	6	6	2.49
9 HT 44231	1/2	9	12	4	1.99
9 HT 44232	1/2	10	12	4	1.99
9 HT 44228	1/2	11	12	4	1.99
9 HT 44233	1/2	12	12	4	1.99
9 HT 44234	1/2	13	12	4	2.09
9 HT 44235	1/2	14	12	4	2.09
9 HT 44236	1/2	15	12	4	2.09
9 HT 44266	1/2	16	12	4	2.29
9 HT 44237	1/2	17	12	4	2.29
9 HT 44267	1/2	18	12	5	2.29
9 HT 44238	1/2	19	12	5	2.29
9 HT 44239	1/2	22	12	6	2.49
9 HT 44242	1/2	24	12	6	2.89
9 HT 44243	1/2	27	12	7	2.89
9 HT 44244	1/2	30	12	9	3.29
9 HT 44245	1/2	32	12	10	3.29

METRIC, Deep Sockets

ORDERING INFO: See construction features and Warranty above.

Catalog Number	Drive	mm	Pts.	Wt. oz.	Each
9 HT 44444	1/2	14	12	6	\$3.29
9 HT 44445	1/2	17	12	7	3.39
9 HT 44446	1/2	19	12	7	3.49
9 HT 44447	1/2	22	12	8	3.69
9 HT 44449	1/2	27	12	11	3.89

STANDARD, Regular-depth Sockets

Choose 6-point, 8-point or 12-point openings. 6-point sockets constructed with heavier walls than 12-point sockets. 8-point sockets are used for square nuts, refrigeration and farm equipment. A 12-point socket gives you more turning positions than a 6-point socket.

CONSTRUCTION:

See features above.

ORDERING INFORMATION:

See Warranty above.

Catalog Number	Drive	In.	Pts.	Wt. oz.	Each
9 HT 44054	1/2	7/16	6	4	\$1.79
9 HT 44055	1/2	1/2	6	4	1.79
9 HT 44056	1/2	9/16	6	4	1.79
9 HT 44057	1/2	5/8	6	4	1.99
9 HT 44058	1/2	11/16	6	4	1.99
9 HT 44059	1/2	3/4	6	5	2.29
9 HT 44063	1/2	13/16	6	5	2.39
9 HT 44064	1/2	7/8	6	6	2.49
9 HT 44065	1/2	15/16	6	6	2.69
9 HT 44066	1/2	1	6	7	2.79
9 HT 44067	1/2	1 1/16	6	8	3.09
9 HT 44068	1/2	1 1/8	6	8	3.19
9 HT 44069	1/2	1 1/4	6	10	3.29
9 HT 44221	1/2	7/16	8	4	2.09
9 HT 44222	1/2	1/2	8	4	2.09
9 HT 44223	1/2	9/16	8	4	2.29
9 HT 44224	1/2	5/8	8	5	2.29
9 HT 44225	1/2	11/16	8	5	2.39
9 HT 44226	1/2	3/4	8	6	2.49
9 HT 47501	1/2	7/16	12	4	1.79
9 HT 47502	1/2	1/2	12	4	1.79
9 HT 47503	1/2	9/16	12	4	1.79
9 HT 47504	1/2	5/8	12	4	1.89
9 HT 47505	1/2	11/16	12	4	1.99
9 HT 47506	1/2	3/4	12	4	1.99
9 HT 47507	1/2	13/16	12	4	1.99
9 HT 47508	1/2	7/8	12	5	2.29
9 HT 47509	1/2	15/16	12	5	2.39
9 HT 47511	1/2	1	12	5	2.39
9 HT 47512	1/2	1 1/16	12	6	2.49
9 HT 47513	1/2	1 1/8	12	6	2.69
9 HT 47514	1/2	1 1/4	12	7	2.79
9 HT 47515	1/2	1 1/2	12	8	3.09
9 HT 47516	1/2	1 3/4	12	8	3.19
9 HT 47517	1/2	1 7/8	12	10	3.29

STD., Deep Sockets

ORDER INFO: See construction features and Warranty above.

Catalog No.	Drive	In.	Pts.	Wt.	Each
9 HT 47521	1/2	1/2	12	6 oz.	\$2.89
9 HT 47522	1/2	9/16	12	7 oz.	2.89
9 HT 47523	1/2	5/8	12	6 oz.	2.89
9 HT 47524	1/2	11/16	12	7 oz.	2.89
9 HT 47525	1/2	3/4	12	8 oz.	2.99
9 HT 47526	1/2	25/32	12	7 oz.	2.99
9 HT 47527	1/2	13/16	12	8 oz.	3.09
9 HT 47528	1/2	7/8	12	9 oz.	3.19
9 HT 47529	1/2	15/16	12	10 oz.	3.49
9 HT 47531	1/2	1	12	10 oz.	3.69
9 HT 47532	1/2	1 1/16	12	11 oz.	3.69
9 HT 47533	1/2	1 1/8	12	12 oz.	3.89

1/2-in. Square Drive Spark Plug Socket

CONSTRUCTION: See features above. Neoprene insert protects plugs. 13/16-in. with 6-pt. opening. Hex end for use with wrench.

ORDERING INFORMATION: See Warranty above.

Shpg. wt. 6 oz.
9 HT 44241\$2.99

1/2-in. Square Drive Drag-link Sockets

CONSTRUCTION: Molybdenum alloy steel. Heat-treated and tempered. Nickel-chrome plated. Screwdriver-type bit for slotted nuts on steering gear, shocks.

ORDERING INFORMATION: See Warranty above.

Catalog No.	Size	Shpg. wt.	Each
9 HT 44511	9/16-in.	4 oz.	\$2.49
9 HT 44512	5/8-in.	4 oz.	2.69
9 HT 44513	11/16-in.	5 oz.	2.89
9 HT 44514	3/4-in.	8 oz.	3.19

3/4-INCH SQUARE DRIVE



STANDARD 9-pc. Socket Set

Regular depth with
12-point openings **\$34.50** set

CONSTRUCTION: Molybdenum alloy steel. Heat-treated, then oil-quenched and tempered for uniform hardness. Nickel-chrome plated to resist rust.

SET COMPOSITION: Set contains nine sockets with 12-point openings. Sizes include 1 1/16, 1 1/8, 1 1/4, 1 1/2, 1 3/4, 1 7/8, 2, 2 1/8, 2 1/4, 2 1/2, 2 3/4, 3, 3 1/4, 3 1/2, 3 3/4, 4, 4 1/4, 4 1/2, 4 3/4, 5, 5 1/4, 5 1/2, 5 3/4, 6, 6 1/4, 6 1/2, 6 3/4, 7, 7 1/4, 7 1/2, 7 3/4, 8, 8 1/4, 8 1/2, 8 3/4, 9, 9 1/4, 9 1/2, 9 3/4, 10, 10 1/4, 10 1/2, 10 3/4, 11, 11 1/4, 11 1/2, 11 3/4, 12, 12 1/4, 12 1/2, 12 3/4, 13, 13 1/4, 13 1/2, 13 3/4, 14, 14 1/4, 14 1/2, 14 3/4, 15, 15 1/4, 15 1/2, 15 3/4, 16, 16 1/4, 16 1/2, 16 3/4, 17, 17 1/4, 17 1/2, 17 3/4, 18, 18 1/4, 18 1/2, 18 3/4, 19, 19 1/4, 19 1/2, 19 3/4, 20, 20 1/4, 20 1/2, 20 3/4, 21, 21 1/4, 21 1/2, 21 3/4, 22, 22 1/4, 22 1/2, 22 3/4, 23, 23 1/4, 23 1/2, 23 3/4, 24, 24 1/4, 24 1/2, 24 3/4, 25, 25 1/4, 25 1/2, 25 3/4, 26, 26 1/4, 26 1/2, 26 3/4, 27, 27 1/4, 27 1/2, 27 3/4, 28, 28 1/4, 28 1/2, 28 3/4, 29, 29 1/4, 29 1/2, 29 3/4, 30, 30 1/4, 30 1/2, 30 3/4, 31, 31 1/4, 31 1/2, 31 3/4, 32, 32 1/4, 32 1/2, 32 3/4, 33, 33 1/4, 33 1/2, 33 3/4, 34, 34 1/4, 34 1/2, 34 3/4, 35, 35 1/4, 35 1/2, 35 3/4, 36, 36 1/4, 36 1/2, 36 3/4, 37, 37 1/4, 37 1/2, 37 3/4, 38, 38 1/4, 38 1/2, 38 3/4, 39, 39 1/4, 39 1/2, 39 3/4, 40, 40 1/4, 40 1/2, 40 3/4, 41, 41 1/4, 41 1/2, 41 3/4, 42, 42 1/4, 42 1/2, 42 3/4, 43, 43 1/4, 43 1/2, 43 3/4, 44, 44 1/4, 44 1/2, 44 3/4, 45, 45 1/4, 45 1/2, 45 3/4, 46, 46 1/4, 46 1/2, 46 3/4, 47, 47 1/4, 47 1/2, 47 3/4, 48, 48 1/4, 48 1/2, 48 3/4, 49, 49 1/4, 49 1/2, 49 3/4, 50, 50 1/4, 50 1/2, 50 3/4, 51, 51 1/4, 51 1/2, 51 3/4, 52, 52 1/4, 52 1/2, 52 3/4, 53, 53 1/4, 53 1/2, 53 3/4, 54, 54 1/4, 54 1/2, 54 3/4, 55, 55 1/4, 55 1/2, 55 3/4, 56, 56 1/4, 56 1/2, 56 3/4, 57, 57 1/4, 57 1/2, 57 3/4, 58, 58 1/4, 58 1/2, 58 3/4, 59, 59 1/4, 59 1/2, 59 3/4, 60, 60 1/4, 60 1/2, 60 3/4, 61, 61 1/4, 61 1/2, 61 3/4, 62, 62 1/4, 62 1/2, 62 3/4, 63, 63 1/4, 63 1/2, 63 3/4, 64, 64 1/4, 64 1/2, 64 3/4, 65, 65 1/4, 65 1/2, 65 3/4, 66, 66 1/4, 66 1/2, 66 3/4, 67, 67 1/4, 67 1/2, 67 3/4, 68, 68 1/4, 68 1/2, 68 3/4, 69, 69 1/4, 69 1/2, 69 3/4, 70, 70 1/4, 70 1/2, 70 3/4, 71, 71 1/4, 71 1/2, 71 3/4, 72, 72 1/4, 72 1/2, 72 3/4, 73, 73 1/4, 73 1/2, 73 3/4, 74, 74 1/4, 74 1/2, 74 3/4, 75, 75 1/4, 75 1/2, 75 3/4, 76, 76 1/4, 76 1/2, 76 3/4, 77, 77 1/4, 77 1/2, 77 3/4, 78, 78 1/4, 78 1/2, 78 3/4, 79, 79 1/4, 79 1/2, 79 3/4, 80, 80 1/4, 80 1/2, 80 3/4, 81, 81 1/4, 81 1/2, 81 3/4, 82, 82 1/4, 82 1/2, 82 3/4, 83, 83 1/4, 83 1/2, 83 3/4, 84, 84 1/4, 84 1/2, 84 3/4, 85, 85 1/4, 85 1/2, 85 3/4, 86, 86 1/4, 86 1/2, 86 3/4, 87, 87 1/4, 87 1/2, 87 3/4, 88, 88 1/4, 88 1/2, 88 3/4, 89, 89 1/4, 89 1/2, 89 3/4, 90, 90 1/4, 90 1/2, 90 3/4, 91, 91 1/4, 91 1/2, 91 3/4, 92, 92 1/4, 92 1/2, 92 3/4, 93, 93 1/4, 93 1/2, 93 3/4, 94, 94 1/4, 94 1/2, 94 3/4, 95, 95 1/4, 95 1/2, 95 3/4, 96, 96 1/4, 96 1/2, 96 3/4, 97, 97 1/4, 97 1/2, 97 3/4, 98, 98 1/4, 98 1/2, 98 3/4, 99, 99 1/4, 99 1/2, 99 3/4, 100, 100 1/4, 100 1/2, 100 3/4, 101, 101 1/4, 101 1/2, 101 3/4, 102, 102 1/4, 102 1/2, 102 3/4, 103, 103 1/4, 103 1/2, 103 3/4, 104, 104 1/4, 104 1/2, 104 3/4, 105, 105 1/4, 105 1/2, 105 3/4, 106, 106 1/4, 106 1/2, 106 3/4, 107, 107 1/4, 107 1/2, 107 3/4, 108, 108 1/4, 108 1/2, 108 3/4, 109, 109 1/4, 109 1/2, 109 3/4, 110, 110 1/4, 110 1/2, 110 3/4, 111, 111 1/4, 111 1/2, 111 3/4, 112, 112 1/4, 112 1/2, 112 3/4, 113, 113 1/4, 113 1/2, 113 3/4, 114, 114 1/4, 114 1/2, 114 3/4, 115, 115 1/4, 115 1/2, 115 3/4, 116, 116 1/4, 116 1/2, 116 3/4, 117, 117 1/4, 117 1/2, 117 3/4, 118, 118 1/4, 118 1/2, 118 3/4, 119, 119 1/4, 119 1/2, 119 3/4, 120, 120 1/4, 120 1/2, 120 3/4, 121, 121 1/4, 121 1/2, 121 3/4, 122, 122 1/4, 122 1/2, 122 3/4, 123, 123 1/4, 123 1/2, 123 3/4, 124, 124 1/4, 124 1/2, 124 3/4, 125, 125 1/4, 125 1/2, 125 3/4, 126, 126 1/4, 126 1/2, 126 3/4, 127, 127 1/4, 127 1/2, 127 3/4, 128, 128 1/4, 128 1/2, 128 3/4, 129, 129 1/4, 129 1/2, 129 3/4, 130, 130 1/4, 130 1/2, 130 3/4, 131, 131 1/4, 131 1/2, 131 3/4, 132, 132 1/4, 132 1/2, 132 3/4, 133, 133 1/4, 133 1/2, 133 3/4, 134, 134 1/4, 134 1/2, 134 3/4, 135, 135 1/4, 135 1/2, 135 3/4, 136, 136 1/4, 136 1/2, 136 3/4, 137, 137 1/4, 137 1/2, 137 3/4, 138, 138 1/4, 138 1/2, 138 3/4, 139, 139 1/4, 139 1/2, 139 3/4, 140, 140 1/4, 140 1/2, 140 3/4, 141, 141 1/4, 141 1/2, 141 3/4, 142, 142 1/4, 1

CRAFTSMAN® Socket Wrench Sets in 1/4, 3/8 and 1/2-inch square drive

1/4-INCH SQUARE DRIVE SETS Ideal for precision ignition, radio, refrigerator, electronic and airplane work

CONSTRUCTION: All sockets, ratchets, ratchet accessories of molybdenum alloy steel. Heat-treated and tempered. Nickel-chrome plated.

(1) 15-pc. STD. Set



Sep. prices \$19.50
total \$25.46

SET COMPOSITION: Nine 6-pt. sockets (3/16 thru 1/2-in.); quick-release, reversible ratchet; 6-in. socket extension; 3 extension bars (1 1/2, 3, 6-in.); Permanex® case.
ORDER INFO: Warranty p. 56.
9 HT 44141—Wt. 15 oz. .Set \$19.50

15-pc. METRIC Set

Sep. prices \$19.50
total \$25.46

SET COMP.: Nine 6-pt. sockets (4, 5, 6, 7, 8, 9, 10, 11, 12mm); quick-release, reversible ratchet; 6-in. socket ext.; 3 ext. bars (1 1/2, 3, 6-in.); Permanex® case.
ORDER INFO: See warranty p. 56.
9 HT 44143—Wt. 15 oz. .Set \$19.50

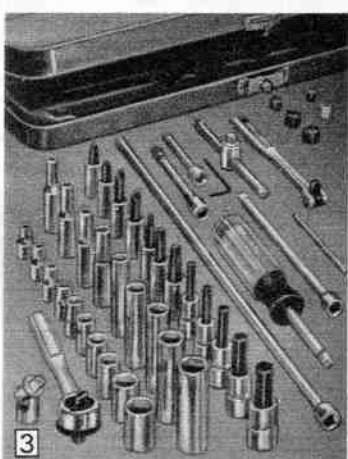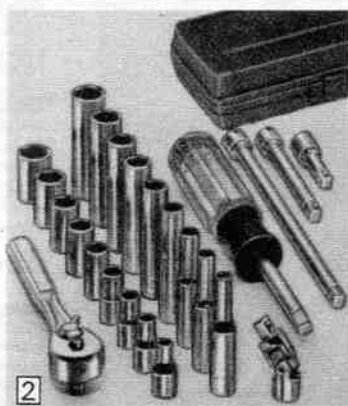

(2) 25-pc. STD. Set


Sep. prices \$34.50
total \$48.06

SET COMPOSITION: Nine 6-pt. sockets and nine 6-pt. deep sockets (3/16 thru 1/2-in.); quick-release reversible ratchet; 6-in. socket ext.; 3 ext. bars (1 1/2, 3, 6-in.); universal joint; Permanex® case.
ORDER INFO: See warranty p. 56.
Shipping weight 2 lbs. 10 oz.
9 HT 44142Set \$34.50

(3) 48-pc. STD. Set

Sep. prices \$59.00
total \$79.80

SET COMPOSITION: Ten 6-pt. sockets (3/32 thru 1/2-in.); nine 6-pt. deep sockets (3/16 thru 1/2-in.); fine-tooth, quick-release reversible ratchet; flex T-handle; slide bar; crossbar; 6-in. socket ext.; 4-in. flex ext.; handle; 3 ext. bars (3, 6, 14-in.); 3/4-in. hex key wrench; 5 hex wrench sockets (3/16 thru 3/8-in.); 2 Phillips screwdriver-bit sockets (Nos. 1, 2); 3 clutch-head bit sockets (3/32 thru 1/8-in.); 2 screwdriver-bit sockets (.030, .039); universal joint; 5-pc. magnetic insert set; metal case.
ORDER INFO: See warranty p. 56.
Shipping weight 5 lbs. 2 oz.
9 HT 44392Set \$59.00

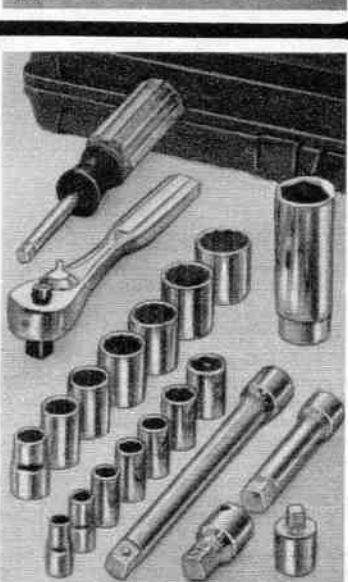

22-pc. STANDARD 1/4 and 3/8-inch Square Drive Set

Sep. prices \$29.50
total \$43.69

CONSTRUCTION: All sockets, ratchets and ratchet accessories constructed of molybdenum alloy steel. Heat-treated and tempered. Nickel-chrome plated.

SET COMP.: Permanex® case.
1/4-inch Square Drive Parts: Seven 6-point sockets (1/4 thru 1/2-in.); 6-inch socket extension.
3/8-inch Square Drive Parts: Seven 12-point sockets (3/8 thru 1/2-in.); 1 1/8-inch, 6-point spark plug socket; quick-release, reversible ratchet; socket adapter (3/8 to 1/4-in.); 3 ext. bars (1 1/2, 3, 6-in.).
ORDERING INFORMATION: See warranty on opposite page.
Shpg. wt. 3 lbs. 3 oz.
9 HT 33236Set \$29.50

3/8-INCH SQUARE DRIVE SETS Ideal for work on cars, outboard motors, lawn mowers. Excellent for home use

CONSTRUCTION: All sockets, ratchets, ratchet accessories constructed of molybdenum alloy steel—specially selected for its strength and resistance to brittleness. Heat-treated and tempered for uniform hardness and strength. Nickel-chrome plated to resist rust and corrosion.

(4) 13-pc. STD. Set

Sep. prices \$24.50
total \$34.38

SET COMPOSITION: Seven 12-point sockets (3/8 thru 1/2-inch); 1 1/8-inch, 6-pt. spark plug socket; quick-release, reversible ratchet; universal joint; two extension bars (3, 6-in.); Permanex® case.


ORDERING INFO: See warranty on opposite page.
Shpg. wt. 2 lbs. 9 oz.
9 HT 33225Set \$24.50

13-pc. METRIC Set

Sep. prices \$24.50
total \$34.58

SET COMPOSITION: Same as item (4) except seven 12-pt. sockets are 9 thru 15mm.

ORDERING INFO: See warranty on opposite page.
Shpg. wt. 2 lbs. 8 oz.
9 HT 44147Set \$24.50

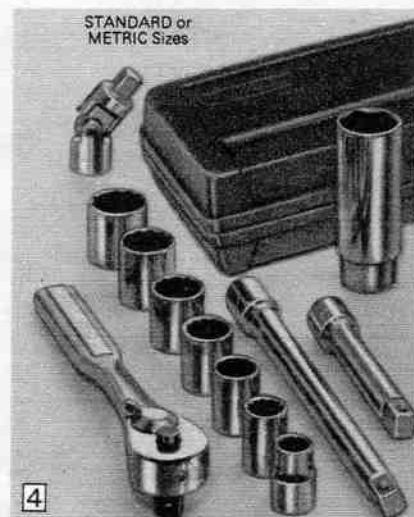

(5) 21-pc. STD. Set

Sep. prices \$34.50
total \$52.90

SET COMP.: Seven 6-point deep sockets (3/8 thru 1/2-inch); seven 12-pt. sockets (3/8 thru 1/2-inch); 1 1/8-inch spark plug socket; quick-release, reversible ratchet; universal joint; 3 extension bars (1 1/2, 3, 6-in.); Permanex® case.


ORDERING INFO: See warranty on opposite page.
Shpg. wt. 4 lbs. 2 oz.
9 HT 33227Set \$34.50

21-pc. METRIC Set

Sep. prices \$34.50
total \$53.00

SET COMP.: As (5), but seven 6-pt. deep sockets, seven 12-pt. sockets are 9 thru 15mm.

ORDERING INFO: See warranty on opposite page.
Shpg. wt. 3 lbs. 13 oz.
9 HT 44149Set \$34.50

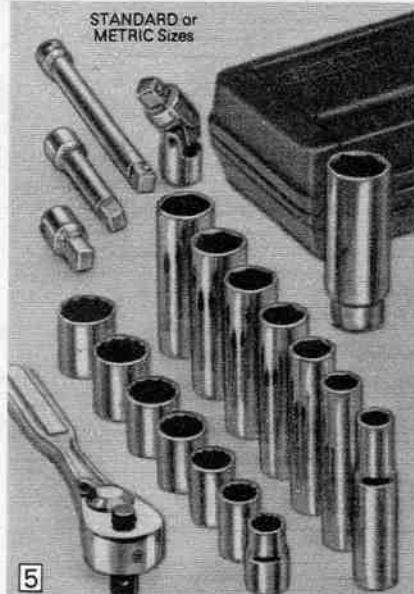

1/2-INCH SQUARE DRIVE Excellent for use in repairing cars and power equipment



16-piece
STANDARD
or METRIC Set \$34.50

CONSTRUCTION: All sockets, ratchets, ratchet accessories are constructed of molybdenum alloy steel. Heat-treated and tempered. Nickel-chrome plated.


STANDARD Set

SET COMPOSITION: Ten 12-pt. sockets (1/2 thru 1-in.); 1 1/8-in. 6-pt. spark plug socket; quick-release, reversible ratchet; universal joint; 2 extension bars (3, 6-in.); Permanex® case.
ORDER INFO: Warranty p. 56.
Shpg. wt. 5 lbs. 15 oz.
9 HT 44094Set \$34.50

METRIC Set

SET COMPOSITION: Ten 12-pt. sockets (9 thru 15, 17, 19, 22mm); quick-release, reversible ratchet; 1 1/8-in., 6-pt. spark plug socket; universal joint; 2 extension bars (3, 6-in.); Permanex® case.
ORDER INFO: See warranty p. 56.
9 HT 44098—Wt. 6 lbs. 3 oz. .Set \$34.50

CRAFTSMAN® Heavy-duty Industrial Tools... made to handle tough jobs

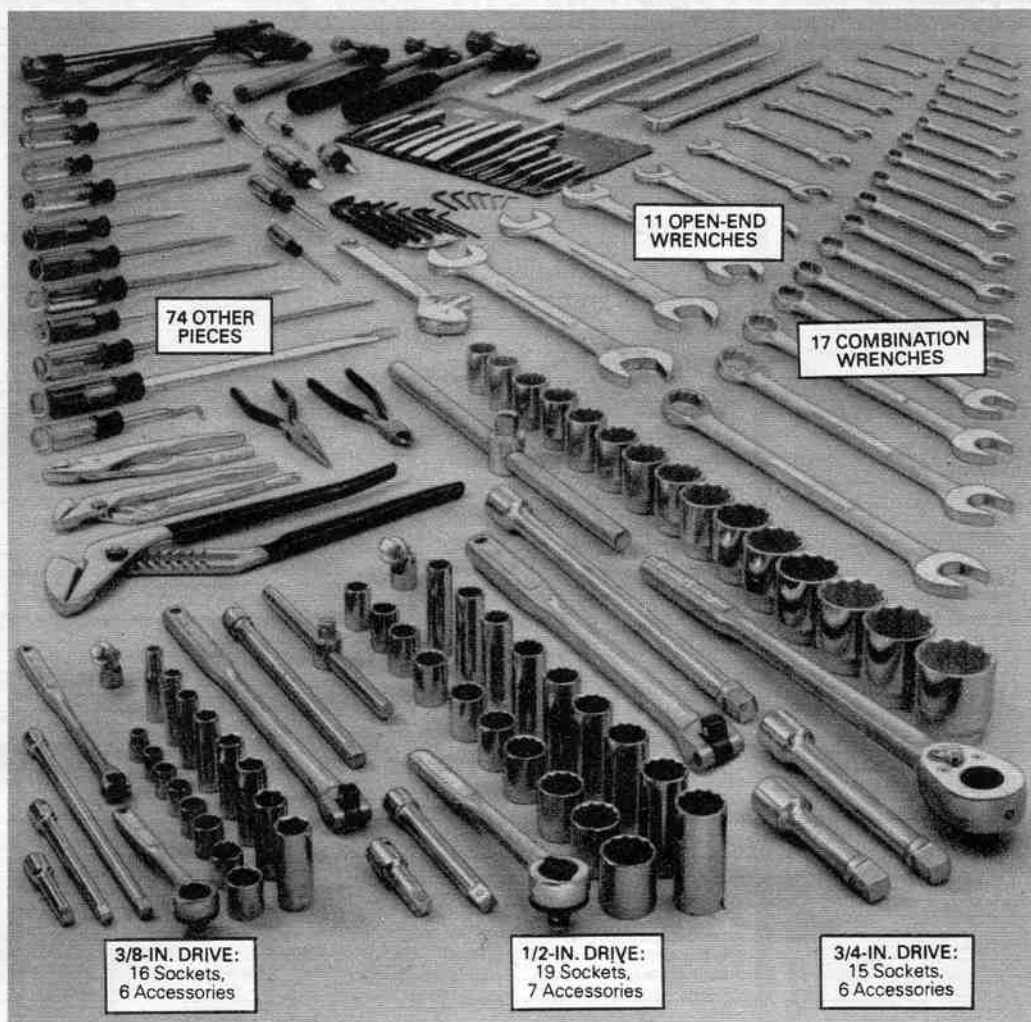

171-pc. STANDARD Industrial Tool Set

Save \$181.34

sep. prices \$449.00
total \$630.34

CONSTRUCTION: Every CRAFTSMAN flat wrench, socket, ratchet and ratchet accessory is made from a select molybdenum alloy steel—specially chosen for its overall toughness. Heat-treated, then oil-quenched and tempered to uniformly “through-harden” tools so there are no inner soft spots. Nickel-chrome plated to resist rust and corrosion.

SET COMPOSITION:

3/8-inch Square Drive Parts: Fine-tooth, quick-release reversible ratchet; eight 6-pt. deep sockets (3/8 thru 1 1/16-in.); Eight 12-pt. sockets (3/8 thru 1 1/16-in.); 10-in. flex T-handle; universal joint; 3 extension bars (3, 6, 10-in.).

1/2-inch Square Drive Parts: Fine-tooth, quick-release reversible ratchet; ten 12-pt. sockets (1/2 thru 1 1/4-in.); nine 12-pt. deep sockets (1/2 thru 1 1/4-in.); 15-in. flex T-handle; universal joint; slide bar handle; 3 extension bars (3, 6, 10-in.).

3/4-inch Square Drive Parts: Quick-release, reversible ratchet; fifteen 12-pt. sockets (1 thru 2-in.); flex handle; slide bar handle; 3 extension bars (5, 8, 16-in.).

Wrenches: 17 combination (1/4 thru 1 1/16-in.); 11 open-end (1/4x3/16 thru 1 1/2x1 1/8-in.); 12-in. adjustable wrench.

Miscellaneous Parts: 14-pc. hex key set; rolling wedge bar; 2 ball pein hammers (12, 32-oz.); 12-oz. plastic tip hammer; 10 screwdrivers (1/8x4 thru 3/8x12); 7 Phillips screwdrivers (Nos. 0 thru 4, stubby); 12-pc. punch and chisel set; cotter key extractor; 3 cold chisels (3/8x12, 3/8x18, 3/4x12-in.); pry bar; 2 Arc Joint pliers (9 1/2, 16-in.); 8-in. slip-joint pliers; 7-in. diagonal cutting pliers; 8-in. long chain nose pliers; hacksaw with 15 additional blades.

ORDERING INFORMATION: See Warranty on page 59.

9 HT 3311L—Wt. 55 lbs. ...Set \$449.00

18-pc. and 27-pc. 3/4-inch Square Drive Sets

Made strong enough to handle the toughest jobs. Excellent for use on heavy equipment in plants, garages and repair shops



18-pc. STANDARD Socket Wrench Set \$125.00

CONSTRUCTION: All sockets, ratchets, and ratchet accessories constructed of molybdenum alloy steel specially chosen for its strength. Heat-treated and tempered for uniform hardness and strength. Nickel-chrome plating adds rust and corrosion resistance.

SET COMPOSITION: Thirteen 12-point sockets (1 1/16 thru 2-inch); quick-release reversible ratchet; slide bar handle; 2 extension bars (8, 16-in.); steel tool box.

ORDERING INFORMATION: See Warranty on page 59.
9 HT 46315C—Shipping weight 33 lbs. ...Set \$125.00



27-pc. STANDARD Socket Wrench Set \$189.00

Our most complete heavy-duty 3/4-inch square drive Socket Wrench Set handles the toughest jobs. Excellent for repairing heavy industrial and farm equipment.

CONSTRUCTION: All sockets, ratchets and ratchet accessories constructed of molybdenum alloy steel. Heat treated and tempered. Nickel-chrome plated.

SET COMPOSITION: Twenty-one 12-point sockets (3/8 thru 2 3/8-inch); quick-release, reversible ratchet; 18-inch slide bar handle; three extension bars (5, 8, 16-inch); 18-inch flex T-handle.

ORDERING INFORMATION: See Warranty on page 59.
9 HT 46305C—Shipping weight 38 lbs.Set \$189.00



1-in. Square Drive Set

21-pc. STANDARD Socket Wrench Set \$550.00

CONSTRUCTION: Molybdenum alloy steel. Heat-treated and tempered. Nickel-chrome plated to resist rust.


SET COMPOSITION: Seventeen 12-point sockets (1 1/16 thru 3 1/4-in.); two extension bars (8, 17-in.); reversible ratchet; slide bar handle; metal case.

ORDER INFO: Not CRAFTSMAN. Sent from Chicago, Atlanta, Dallas, Philadelphia or L.A. Allow time. Pay shipping from your Distribution Center.

T9 HT 47969N—Wt. 88 lbs. ...Set \$550.00

CRAFTSMAN® Metric Socket and Wrench Sets increase the versatility of your tool set

FULL UNLIMITED WARRANTY ON CRAFTSMAN HAND TOOLS. If any CRAFTSMAN Hand Tool ever fails to give complete satisfaction, return it to the nearest Sears store throughout the United States and Sears will replace it, free of charge. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

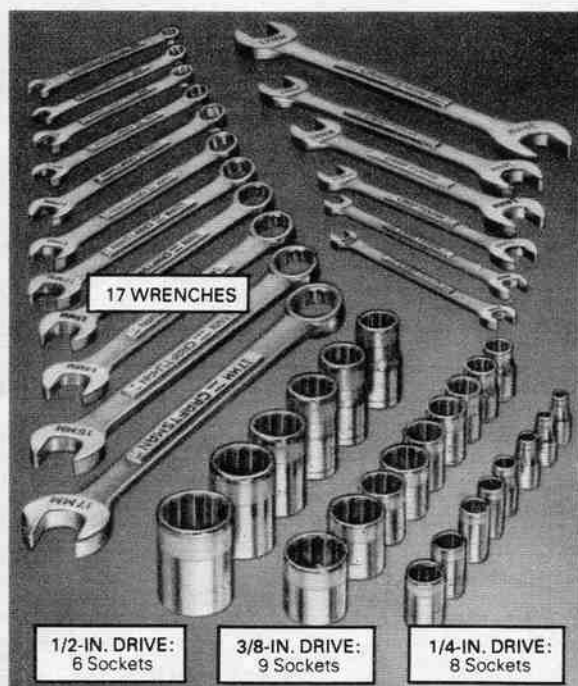

40-piece Set
Save \$44.11 Separate prices total \$84.10 **\$39.99**

CONSTRUCTION: Sockets and wrenches constructed of molybdenum alloy steel. Heat-treated, oil-quenched and tempered. Nickel-chrome plated to resist rust and corrosion.

SET COMPOSITION:

Sockets:

1/4-inch Square Drive: Eight 6-point sockets (4, 5, 6, 7, 8, 9, 10 and 11mm).

3/8-inch Square Drive: Nine 12-point sockets (9, 10, 11, 12, 13, 14, 15, 17 and 19mm).


1/2-inch Square Drive: Six 12-point sockets (13, 14, 15, 17, 19 and 22mm).

Wrenches:

Six open-end wrenches (6x8, 7x9, 10x11, 12x14, 13x15 and 17x19mm); eleven combination wrenches (6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17mm).

ORDERING INFORMATION: See Warranty above.

9 HT 33101—Shipping weight 4 pounds 7 ounces ... \$39.99

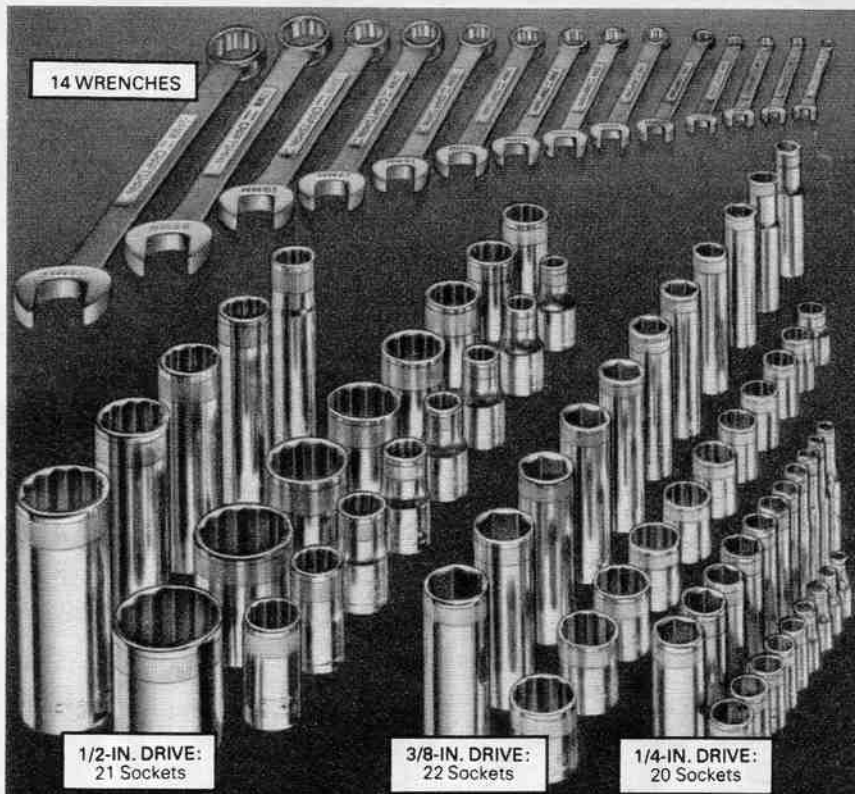

77-piece Set
Save \$77.84 Separate prices total \$177.83 **\$99.99**

More manufacturers are using metric fasteners in their products. Be prepared to service these products with this metric socket and wrench set. Ideal for auto, motorcycle and bike repairs.

CONSTRUCTION: Every socket and wrench is made from a select molybdenum alloy steel—specially chosen for its strength and overall toughness. Heat-treated, then oil-quenched and tempered to uniformly "through-harden" tools so there are no inner soft spots. Nickel-chrome plated.

SET COMPOSITION:

Sockets:

1/4-inch Square Drive: Nine 6-point sockets (4, 5, 6, 7, 8, 9, 10, 11 and 12mm); eleven 6-point deep sockets (4, 5, 6, 7, 8, 9, 10, 11, 12, 13 and 14mm).

3/8-inch Square Drive: Eleven 12-point sockets (9, 10, 11, 12, 13, 14, 15, 16, 17, 18 and 19mm); eleven 6-point deep sockets (9, 10, 11, 12, 13, 14, 15, 16, 17, 18 and 19mm).

1/2-inch Square Drive: Sixteen 12-point sockets (9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24, 27, 30 and 32mm); five 12-point deep sockets (14, 17, 19, 22 and 27mm).

Wrenches:

14 combination wrenches (6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 19, 22 and 24mm).

ORDERING INFORMATION: See Warranty above.

9 HT 33102—Shipping weight 12 pounds 14 ounces ... Set \$99.99

CRAFTSMAN® 66-piece Mechanics' Tool Set in Standard or Metric Sizes

Save \$49 to \$53 \$49.99

66-piece Standard Set. Separate prices total \$99.33.

CONSTRUCTION: Flat wrenches, sockets, ratchets, ratchet accessories made from molybdenum alloy steel. Heat-treated, oil-quenched and tempered. Nickel-chrome plated.

SET COMPOSITION:

1/4-inch Square Drive Parts: Nine 6-pt. sockets (3/16, 1/8, 1/4, 3/8, 1/2, 5/8, 3/4, 15/16, 1-in.).

3/8-in. Sq. Drive Parts: Quick-release reversible ratchet; six 12-pt. sockets (3/8, 7/16, 1/2, 9/16, 5/8, 11/16-in.); 13/16-in. spark plug socket; 6-in. extension bar; adapter (3/8 to 1/4-inch drive).

1/2-inch Square Drive Parts: Quick-release, reversible ratchet; six 12-pt. sockets (1/2, 9/16, 5/8, 11/16, 3/4, 15/16-in.); 3-in. extension bar.

Wrenches: 4 open-end wrenches (1 1/4x3/16, 3/4x7/16, 1/2x9/16, 5/8x3/4-in.).

Miscellaneous Parts: 14-pc. hex-key set; 5-pc. magnetic insert set; 4-pc. box-end ignition wrench set; hack-saw, 10 extra blades; steel tool box.

ORDER INFO: See Warranty above.

9HT33192C—Wt. 18 lbs. Set \$49.99

66-piece Metric Set. Separate prices total \$103.43.

CONSTRUCTION: Flat wrenches, sockets, ratchets, ratchet accessories made from molybdenum alloy steel. Heat-treated, oil-quenched and tempered. Nickel-chrome plated.

SET COMPOSITION:

1/4-inch Square Drive Parts: Nine 6-pt. sockets (4, 5, 6, 7, 8, 9, 10, 11, 12mm).

3/8-in. Sq. Drive Parts: Quick-release, reversible ratchet; six 12-pt. sockets (10, 11, 12, 13, 14 and 15mm); 13/16-in. spark plug socket; 6-in. extension bar; socket adapter (3/8 to 1/4-in. drive).


1/2-inch Square Drive Parts: Quick-release, reversible ratchet; six 12-pt. sockets (13, 14, 15, 17, 19 and 22mm); 3-in. extension bar.

Wrenches: 4 open-end wrenches (7x9, 10x11, 12x14, 13x15mm).

Miscellaneous Parts: 14-pc. hex-key set; 5-pc. magnetic insert set; 4-pc. box-end ignition wrench set; hack-saw, 10 extra blades; steel tool box.

ORDER INFO: See Warranty above.

9HT33193C—Wt. 18 lbs. Set \$49.99

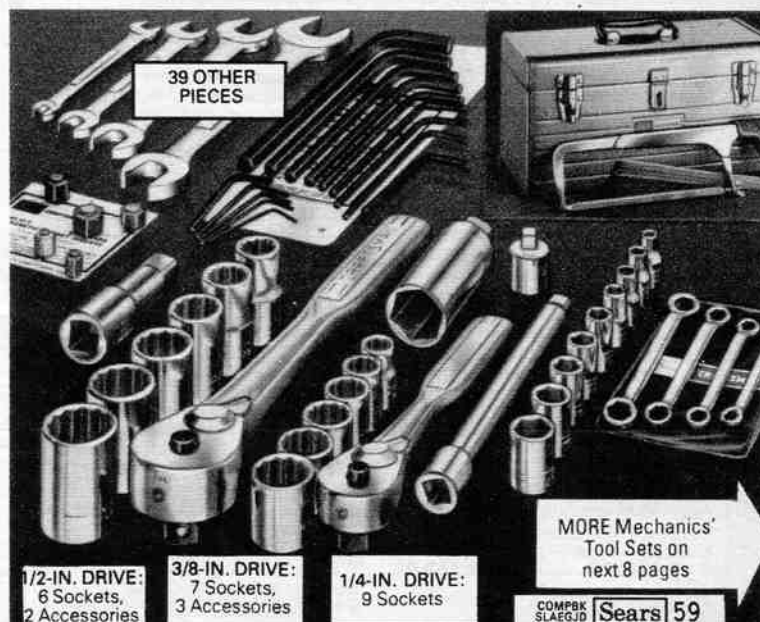

MORE Mechanics' Tool Sets on next 8 pages

COMPK SLAEGJD **Sears** 59



83-Pc. STANDARD or METRIC Mechanics' Tool Set (1/4, 3/8 and 1/2-inch square drive)

CONSTRUCTION: Every CRAFTSMAN flat wrench, socket, ratchet and ratchet accessory is made from a select molybdenum alloy steel—specially chosen because of its strength and resistance to brittleness. Each piece is heat-treated, then oil-quenched and tempered to uniformly "through-hardened" tools so there are no inner soft spots. Nickel-chrome plating adds rust and corrosion resistance.

Standard Set

Separate prices
total \$125.67 **\$69.99**

SET COMPOSITION:

1/4-inch Square Drive Parts: Nine 6-point sockets (sizes 3/16, 1/8, 1/4, 5/16, 3/8, 1/2, 5/8, 3/4, 1-inch); 6-inch socket extension.

3/8-inch Square Drive Parts: Quick-release, reversible ratchet; seven 12-point sockets (sizes 3/8, 7/16, 1/2, 5/8, 3/4, 1 1/8, 1 1/4-inch); 13/16-inch spark plug socket; and 6-inch extension bar.

1/2-inch Square Drive Parts: Quick-release, reversible ratchet; nine 12-point sockets (sizes 1/2, 5/8, 3/4, 1 1/8, 1 1/4, 1 1/2, 1 3/4, 2-inch); 3-inch extension bar.

Wrenches: Six open-end wrenches (1/4x5/16, 3/8x1/2, 1/2x3/4, 3/4x1, 1x1 1/4, 1 1/4x1 1/2); 10-piece combination ignition wrench set.

Miscellaneous Tools: 14-piece hex key set; 2 standard screwdrivers (3/16x4, stubby); No. 2 Phillips screwdriver; pin punch; center punch; 5-piece magnetic insert set; hacksaw with 10 additional blades.

Steel Tool Box: Removable tote tray. Gray baked enamel finish.

ORDERING INFORMATION: See Full Unlimited Warranty on page 61. Shipping weight 19 pounds 9 HT 33087C.....Set \$69.99

Metric Set

Separate prices
total \$133.75 **\$69.99**

SET COMPOSITION:

1/4-inch Square Drive Parts: Nine 6-point sockets (Sizes 4, 5, 6, 7, 8, 9, 10, 11, 12mm); 6-inch socket extension.


3/8-inch Square Drive Parts: Quick-release, reversible ratchet; seven 12-pt. sockets (9, 10, 12, 13, 14, 15, 17mm); 13/16-in. spark plug socket; 6-in. extension bar.

1/2-inch Square Drive Parts: Quick-release, reversible ratchet; nine 12-point sockets (Sizes 10, 11, 12, 13, 14, 15, 17, 19 and 22mm); 3-inch extension bar.

Wrenches: Six open-end wrenches (6x8mm, 7x9mm, 10x11mm, 12x14mm, 13x15mm, 17x19mm); 10-piece combination wrench set.

Miscellaneous Tools: 14-piece hex key set; 2 screwdrivers (3/16x4, stubby); No. 2 Phillips screwdriver; pin punch; center punch; 5-piece magnetic insert set; hacksaw with 10 additional blades.

Steel Tool Box: Removable tote tray. Gray baked enamel finish. **ORDERING INFORMATION:** See Warranty on page 61. Shipping weight 16 pounds 9 HT 33022C.....Set \$69.99

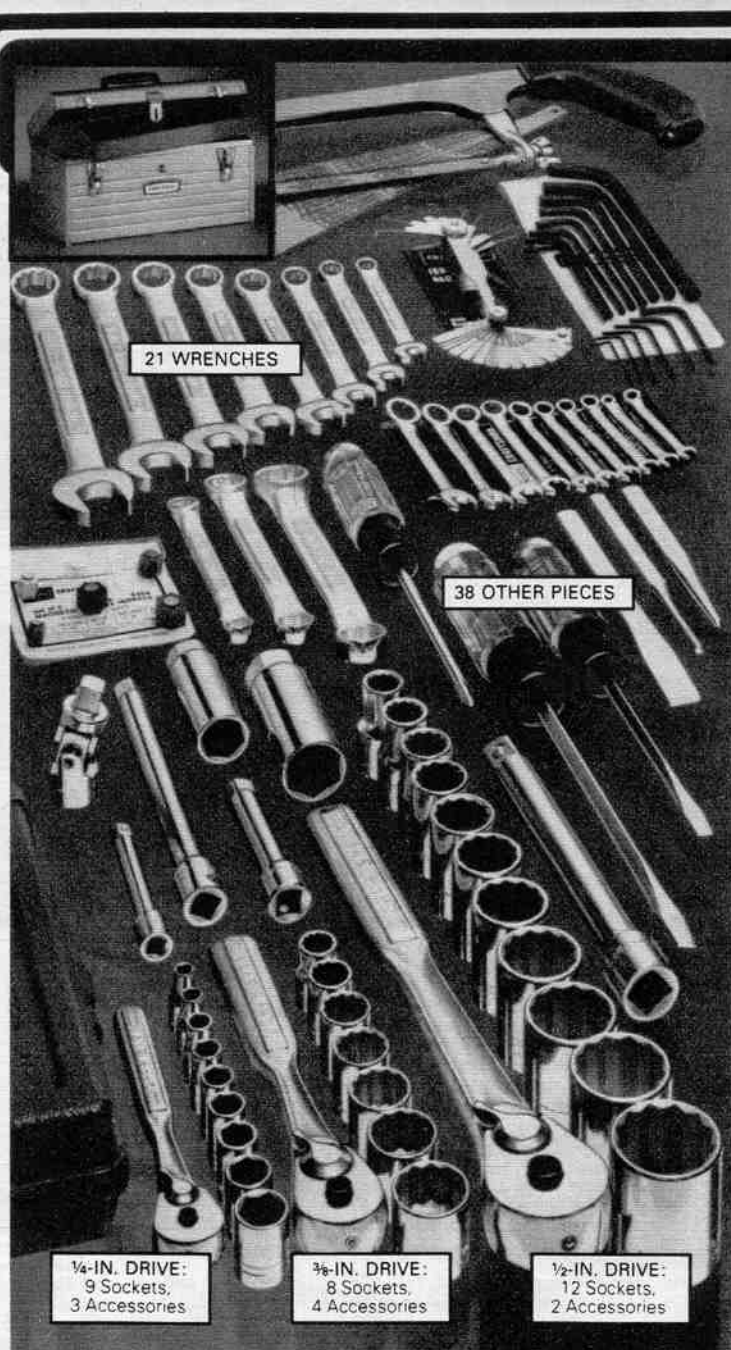

97-Pc. STANDARD Mechanics' Tool Set (1/4, 3/8 and 1/2-inch square drive)

Save \$74.03 Separate prices
total \$174.02 **\$99.99**

CONSTRUCTION: Every CRAFTSMAN flat wrench, socket, ratchet and ratchet accessory is made from a select molybdenum alloy steel—specially chosen because of its strength and resistance to brittleness. Each piece is heat-treated, then oil-quenched and tempered to uniformly "through-hardened" tools so there are no inner soft spots. Nickel-chrome plating adds rust resistance.

SET COMPOSITION:

1/4-inch Square Drive Parts: Quick-release, reversible ratchet; nine 6-point sockets (3/16, 1/8, 1/4, 5/16, 3/8, 1/2, 5/8, 3/4, 1-inch); 3-inch extension bar. Includes Permanex® plastic case.

3/8-inch Square Drive Parts: Quick-release, reversible ratchet; seven 12-point sockets (3/8, 7/16, 1/2, 5/8, 3/4, 1 1/8, 1 1/4-inch); 3-inch, 6-inch extension bar; 5/8-inch sparkplug socket; universal joint.

1/2-inch Square Drive Parts: Quick-release, reversible ratchet; eleven 12-point sockets (1/2, 5/8, 3/4, 1 1/8, 1 1/4, 1 1/2, 1 3/4, 2, 2 1/8, 2 1/4, 2 1/2-inch); 6-inch extension bar; 1 1/2-inch sparkplug socket.

Wrenches: 8 combination wrenches (3/8, 7/16, 1/2, 5/8, 3/4, 1 1/8, 1 1/4, 1 1/2-inch); 10-piece combination ignition wrench set; 3 short box-end wrenches (3/8x1/2, 1/2x3/4, 3/4x1-inch).

Miscellaneous Tools: 14-piece hex key set; 5-piece magnetic insert set; two standard screwdrivers (sizes 3/16x4-inch and 1/4x6-inch); No. 2 Phillips screwdriver; center punch (3/8x4 1/2-inch); pin punch (5/32-inch); chisel (1/2x6-inch); ignition gauge; hacksaw with 10 additional blades.


Steel Tool Box: Full length piano-type hinge, heavy-duty handle, partitioned tray. Gray baked enamel finish.

ORDERING INFORMATION: See Warranty on opposite page. 9 HT 33099C—Shipping weight 24 pounds.....Set \$99.99

CRAFTSMAN® STANDARD-SIZE Mechanics' Tool Set with 3 drive sizes: 1/4, 3/8 and 1/2-in. sq. drive

FULL UNLIMITED WARRANTY ON
CRAFTSMAN® HAND TOOLS

If any CRAFTSMAN Hand Tool ever fails to give complete satisfaction, return it to the nearest Sears store throughout the United States and Sears will replace it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

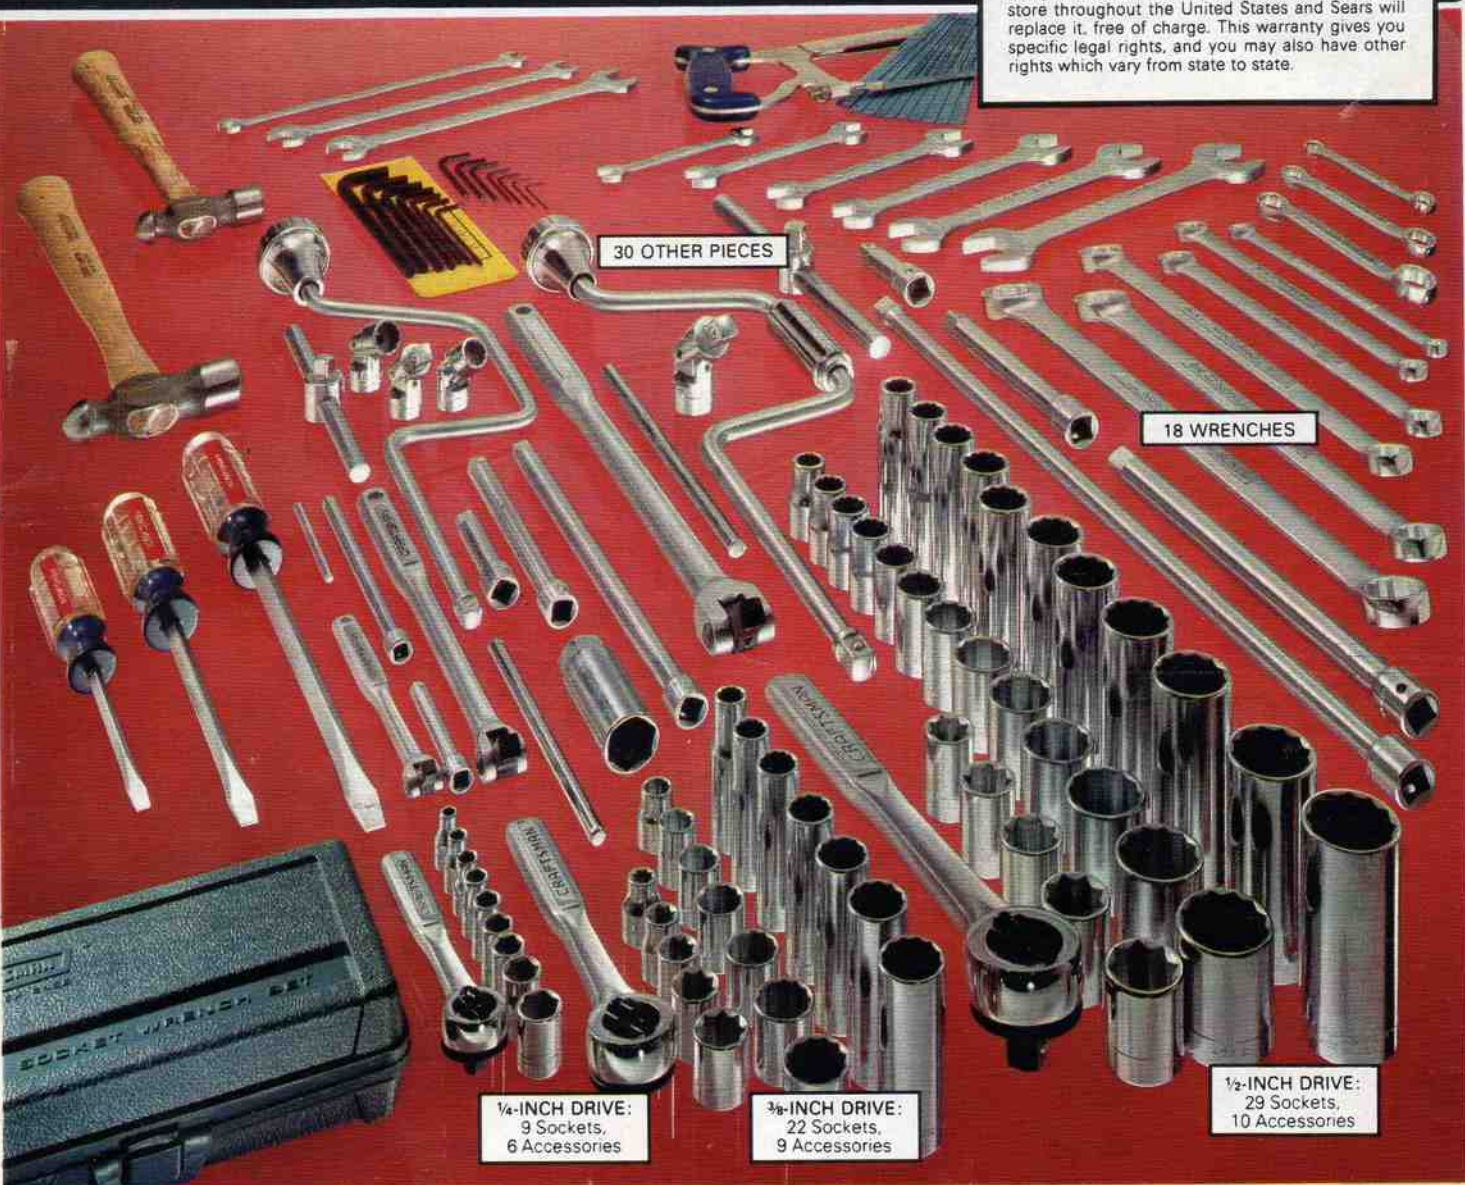

133-pc. Mechanics' Tool Set

Save \$141.38 Sep. prices total \$340.38 **\$199⁰⁰**

CONSTRUCTION: Every CRAFTSMAN flat wrench, socket, ratchet and ratchet accessory is made from a select molybdenum alloy steel—specially chosen for its overall toughness. Heat-treated, then oil-quenched and tempered to uniformly "through-harden" tools so there are no soft spots. Nickel-chrome plated to resist rust.

OUTFIT COMPOSITION:

1/4-inch Square Drive Parts: Fine-tooth, quick-release, reversible ratchet; nine 6-point sockets (3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2-inch); crossbar; 6-inch flex-T-handle; 2 extension bars (3, 6-inch). Includes Permanex® plastic case.

3/8-inch Square Drive Parts: Fine-tooth, quick-release, reversible ratchet; seven 12-point sockets (3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4-inch); five 8-point sockets (1/4, 5/16, 3/8, 7/16, 1/2-inch); seven deep 12-point sockets (3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4-inch); two 12-point flex sockets (1/2, 3/4-inch); 13/16-inch 6-point spark plug socket; crossbar; universal joint; three extension bars (3, 6 and 10-inch); speeder; slide bar; flex-T-handle.

1/2-inch Square Drive Parts: Fine-tooth, quick release, reversible ratchet; thirteen 12-point sockets (7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1 1/16, 1 1/8-inch); five 8-point sockets (1/2, 9/16, 5/8, 11/16, 3/4-inch); eleven deep 12-point sockets (1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1 1/16, 1 1/8-inch); cross-bar; 4 extension bars (3, 6, 10, 20-in.); slide bar; speeder; flex-T-handle; universal joint.

Tool Set plus Chest and Cabinet

Save \$169.36 Sep. prices total \$468.36 **\$299⁰⁰**

Wrenches: 6 open-end wrenches (3/8x7/16, 1/2x9/16, 19/32x11/16, 5/8x3/4, 3/4x7/8, 15/16x1-in.); 3 short box-end wrenches (1/2x9/16, 5/8x3/4, 3/4x7/8-in.); 6 long box-end wrenches (3/8x7/16, 1/2x9/16, 9/16x5/8, 11/16x3/4, 3/4x7/8, 15/16x1-in.); 3 tap-pet wrenches (1/2x9/16, 5/8x11/16, 3/4x7/8-in.).

Miscellaneous Tools: 3 standard screwdrivers (3/16x4, 1/4x6, 5/16x8-in.); 14-pc. hex key set; 2 ball pein hammers (8, 12-oz.); hacksaw with 10 extra blades.

2-Drawer Chest: See item (11) on page 68.

1-Drawer Cabinet: Same construction as cabinets on page 68. Drawer measures 22 1/4x16 1/2x3 1/8 in. deep. 1 adjustable shelf. Four 3-in. casters. Unit measures 26 1/2x18x29 1/4 inches high overall.

ORDERING INFORMATION: See Warranty above.

133-pc. Tool Set alone.

9 HT 43396C—Shpg. wt. 37 lbs. Set \$199.00

Tool Set with Chest and Cabinet.

9 HT 46365N3—Shpg. wt. 121 lbs. 299.00

9 HT 65251C—Chest alone. Wt. 37 lbs. 57.99

9 HT 65331N—Cabinet alone. Wt. 47 lbs. 69.99

2-Drawer
Chest

\$57⁹⁹



1-Drawer
Cabinet

\$69⁹⁹

COMPR LAGJD **Sears** 61

Sears Has a Credit Plan to Suit Most Every Need See Big Book or ask for details

All CRAFTSMAN® Mechanics' Tool Sets backed by our Full Unlimited Warranty

FULL UNLIMITED WARRANTY ON CRAFTSMAN® HAND TOOLS
If any CRAFTSMAN Hand Tool ever fails to give complete satisfaction, return it to the nearest Sears store throughout the U. S. and Sears will replace it, free of charge. This warranty gives you specific rights, and you may also have other rights which vary from state to state.



192-Pc. Mechanics' Tool Set
($1/4$, $3/8$ and $1/2$ -inch square drive)
Save \$148.05 Sep. prices total \$447.05 **\$299⁰⁰**

CONSTRUCTION: Every CRAFTSMAN flat wrench, socket, ratchet and ratchet accessory is made from a select molybdenum alloy steel which is specially chosen because of its strength and its resistance to brittleness. Heat-treated, then oil-quenched and tempered to uniformly "through-harden" tools so there are no inner soft spots. Nickel-chrome plated to resist rust and corrosion.

OUTFIT COMPOSITION:

$1/4$ -inch Square Drive Parts: Fine-tooth, quick-release reversible ratchet; nine 12-pt. sockets ($3/16$, $7/32$, $1/4$, $9/32$, $5/16$, $11/32$, $3/8$, $7/16$, $1/2$ -inch); nine deep 6-pt. sockets ($3/16$, $7/32$, $1/4$, $9/32$, $5/16$, $11/32$, $3/8$, $7/16$, $1/2$ -inch); 6-in. flex T-handle; 2 extension bars (3, 6-in.); universal joint; Permatex® case.

$3/8$ -inch Square Drive Parts: Fine-tooth, quick-release reversible ratchet; seven 12-pt. sockets ($3/8$, $7/16$, $1/2$, $9/16$, $5/8$, $11/16$, $3/4$ -in.); seven deep 12-pt. sockets ($3/8$, $7/16$, $1/2$, $9/16$, $5/8$, $11/16$, $3/4$ -in.); seven 6-pt. flex sockets ($3/8$, $7/16$, $1/2$, $9/16$, $5/8$, $11/16$, $3/4$ -in.); $5/8$ -inch spark plug socket; flex T-handle; 3 extension bars (3, 6, 10-in.); universal joint.

$1/2$ -inch Square Drive Parts: Fine-tooth, quick-release reversible ratchet; thirteen 12-pt. sockets ($7/16$, $1/2$, $9/16$, $5/8$, $11/16$, $3/4$, $13/16$, $7/8$, $15/16$, 1 , $1 1/16$, $1 1/8$ -in.); eleven deep 12-pt. sockets ($1/2$, $9/16$, $5/8$, $11/16$, $3/4$, $13/16$, $7/8$, $15/16$, 1 , $1 1/16$, $1 1/8$ -in.); $13/16$ -in., 6-pt. spark plug socket; flex T-handle; 3 extension bars (3, 6, 10-in.); universal joint.

62 **Sears** COMPBK LAEGJ02

Tool Set, Chest and Cabinet
Separate prices total \$622.03 **\$459⁹⁹**

Wrenches: 14 combination wrenches ($1/4$, $5/16$, $11/32$, $3/8$, $7/16$, $1/2$, $9/16$, $5/8$, $11/16$, $3/4$, $13/16$, $7/8$, $15/16$, 1-in.); 3 short box-end wrenches ($1/2 \times 9/16$, $5/8 \times 3/4$, $3/4 \times 13/16$); 8-pc. open-end ignition wrench set; 10-pc. combination ignition wrench set; 3 flare nut wrenches ($1/2 \times 9/16$, $5/8 \times 11/16$, $3/4 \times 13/16$ -in.); 8-inch adjustable.

Miscellaneous Parts: 13-pc. tap and die set; Arc Joint® pliers; diagonal cutting pliers; ignition pliers; slip joint pliers; locking pliers; 7 nut drivers ($3/16$, $1/4$, $5/16$, $11/32$, $3/8$, $7/16$, $1/2$ -in.); four standard screwdrivers ($3/16 \times 4$, $1/4 \times 6$, $5/16 \times 8$, stubby); 4 Phillips screwdrivers (Nos. 1, 2, 3, stubby); 5-pc. magnetic insert kit; 14-pc. hex key set; 5-pc. punch, chisel set; ignition gauge; 12-oz. ball peen hammer; hacksaw, 10 extra blades.

3-drawer Chest: Same construction as chests on page 69. Drawers measure $10 3/4$ inches from front to back, $22 1/2$ inches wide. One drawer $1 7/8$ inches deep, one $2 13/16$ inches deep, one $3 13/16$ inches deep. Removable tote tray $18 1/2 \times 7 1/2 \times 1 1/2$ inches deep.

18-drawer Cabinet: See item (12) on page 68.

ORDERING INFORMATION: See Warranty above.

192-pc. Tool Set alone.

9 HT 43397C—Shipping weight 40 pounds \$299.00

Tool Set with Chest.


9 HT 46366L2—Shipping weight 86 pounds 359.99

Tool Set with Chest and Cabinet.

9 HT 46367N3—Shipping weight 181 pounds 459.99



**Sears Has a Credit Plan
to Suit Most Every Need**
See Big Book or ask for details

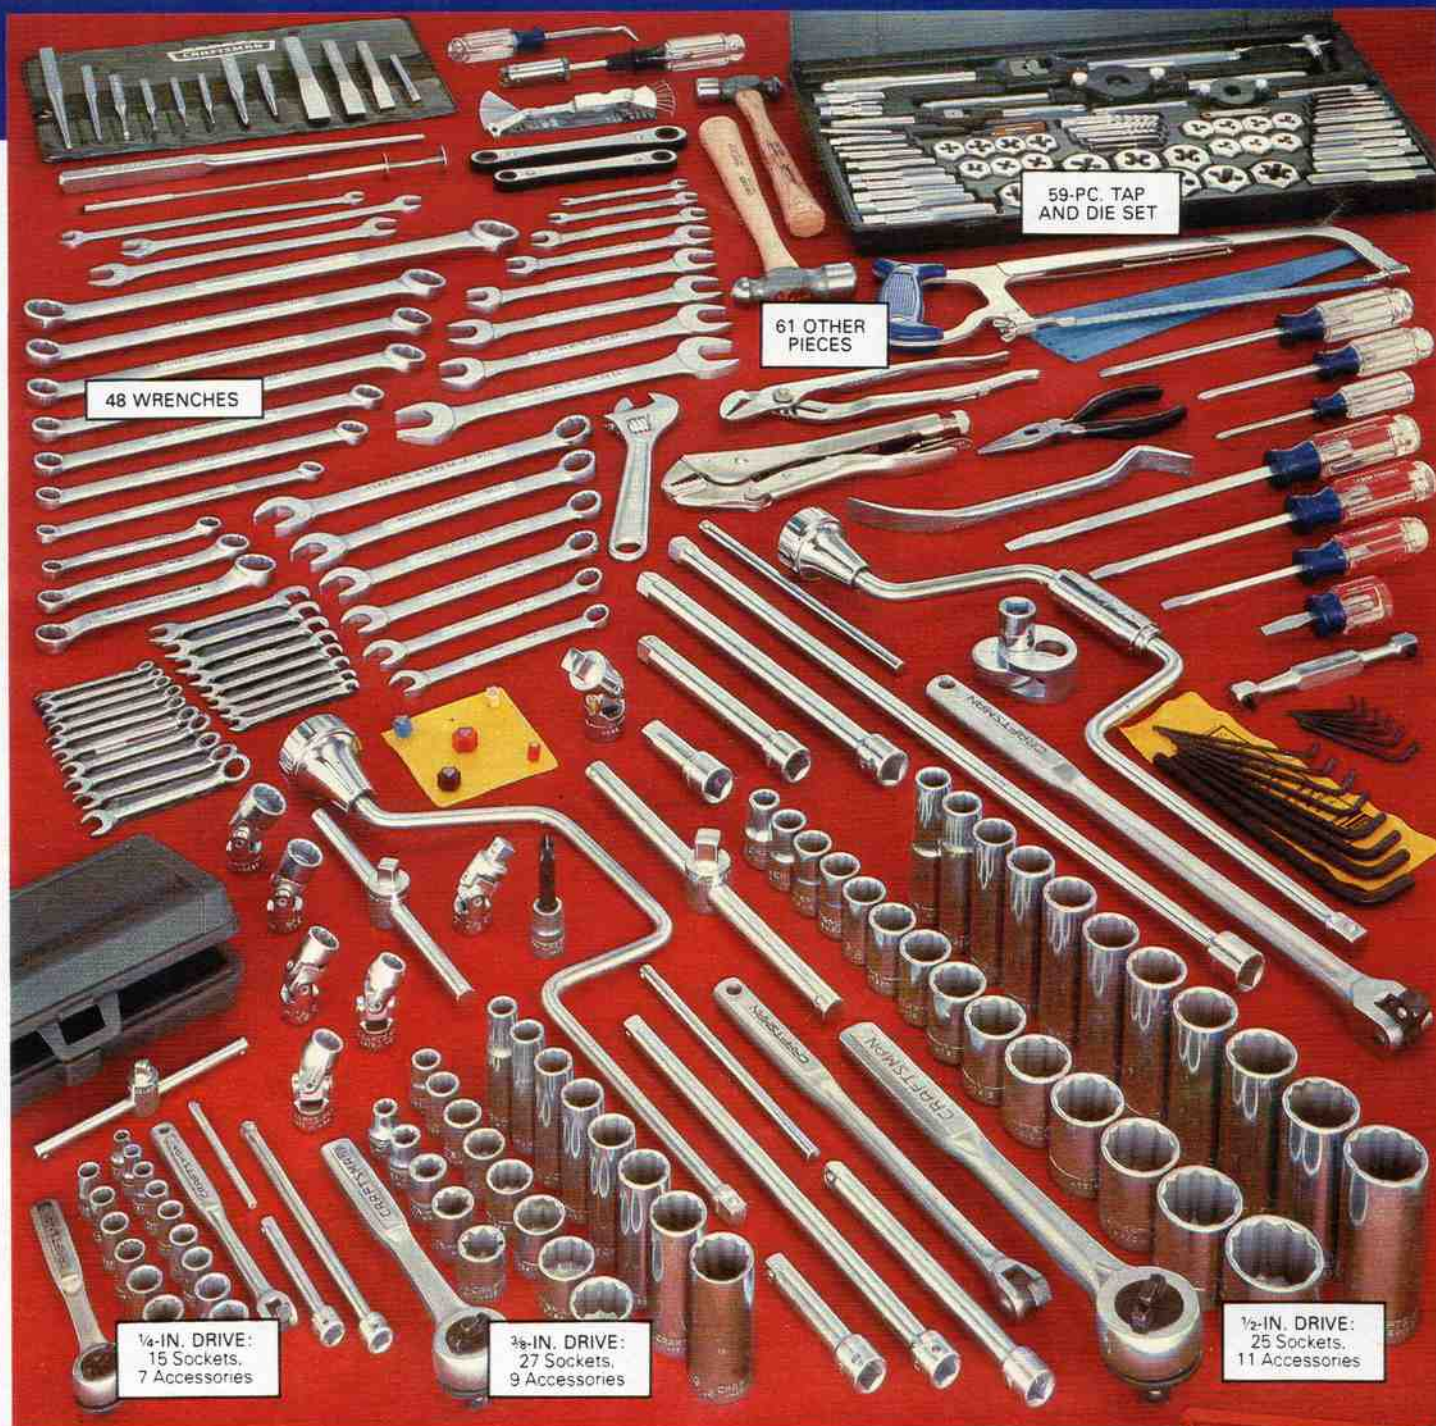

262-piece Mechanics' Tool Set (1/4, 3/8 and 1/2-inch square drive)

Save \$186.28 Separate prices total \$575.28 **\$389⁰⁰**

CONSTRUCTION: Every Craftsman® flat wrench, socket, ratchet and ratchet accessory is made from molybdenum alloy steel. Heat-treated, then oil-quenched and tempered. Nickel-chrome plated to resist rust, corrosion.

OUTFIT COMPOSITION: 1/4-in. Sq. Dr. Parts: Fine-tooth, quick-release reversible ratchet; nine 6-pt. sockets (3/16 thru 1/2-in.); six 12-pt. sockets (3/32 thru 1/2-in.); 2 extension bars (3, 6-in.); 6-in. flex T-handle; cross bar; 4 1/2-inch slide bar; Permanex® case.

3/8-in. Square Drive Parts: Fine-tooth, quick-release reversible ratchet; eight 12-pt. sockets (3/8 thru 1 1/16-in.); five 8-pt. sockets (1/4 thru 1/2-inch); eight 12-pt. deep sockets (3/8 thru 1 1/16-inch); five 12-pt. flex sockets (3/8 thru 3/4-inch); No. 2 Phillips bit socket; universal joint; 3 extension bars (3, 6, 10-inch); 16-in. speeder; 7-in. slide bar; cross bar; 10-in. flex T-handle.

1/2-in. Sq. Drive Parts: Fine-tooth, quick-release reversible ratchet; fourteen 12-pt. sockets (7/16 thru 1 1/4-in.); eleven 12-pt. deep sockets (1/2 thru 1 1/16-in.); universal joint; 4 extension bars (3, 6, 10, 20-in.); 18-in. speeder; 9-in. slide bar; cross bar; stud extractor; 15-in. flex T-handle.

Tool Set, Chest and Cabinet

Save \$15.98 Separate prices total \$603.98 **\$588⁰⁰**

Wrenches: 8 open-end wrenches (1/4x5/16, 3/8x7/16, 1/2x9/16, 19/32x1 1/16, 5/8x3/4, 13/16x25/32, 3/4x7/8 and 15/16x1-in.); 6 combination wrenches (7/16, 1/2, 3/16, 5/8, 1 1/16 and 3/4-in.); 7 long box-end wrenches (3/8x7/16, 1/2x9/16, 3/16x5/8, 19/32x25/32, 1 1/16x1 1/16, 3/4x7/8 and 15/16x1-in.); 3 short box-end wrenches (1/2x9/16, 3/8x5/8 and 5/8x7/8-in.); 2 ratcheting box-end wrenches (3/8x7/16, 1/2x9/16); 3 tappet wrenches (1/2x9/16, 3/8x1 1/16 and 3/8x7/16-in.); 8-piece open-end ignition wrench set; 10-piece combination ignition wrench set; 8-in. adjustable wrench.

Miscellaneous Parts: 59-pc. tap and die set; 14-pc. hex key set; variable-size nut driver; 5-pc. magnetic insert set; 2 ball pein hammers (8 and 12-oz.); ignition gauge; 3 Phillips screwdrivers (Nos. 1, 2 and 3); offset screwdriver; 4 standard screwdrivers (3/16x4, 1/4x6, 3/8x8 and stubby); 12-in. pick-up tool; 12-in. line-up punch; 12-pc. punch and chisel set; cotter key extractor; long-nose pliers; 10-in. locking pliers; Arc Joint® pliers; brake adjusting tool; hacksaw, 10 extra blades.

Chest and Cabinet: See item (14) on page 68, (17) on page 69.

ORDERING INFORMATION: See warranty on opposite page.

9 HT 46372N3—Tool Set, Chest, Cabinet. Wt. 224 lbs. \$588.00

9 HT 46371L2—Tool Set plus Chest. Wt. 117 lbs. 466.00

9 HT 33035L—262-pc. Tool Set alone. Wt. 63 lbs. 389.00



59-PC. TAP AND
DIE SET

104 OTHER PIECES

1/4-INCH DRIVE:
28 Standard, 8
Metric Sockets,
13 Accessories

3/8-INCH DRIVE:
52 Standard, 9
Metric Sockets,
23 Accessories

in STANDARD and **METRIC** sizes



72 WRENCHES

Full Unlimited Warranty on CRAFTSMAN Hand Tools. If any CRAFTSMAN Hand Tool ever fails to give complete satisfaction, return it to the nearest Sears store throughout the United States and Sears will replace it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

429-Pc. Mechanics' Tool Set
Save \$361.71

Separate prices
total \$1,050.71
\$689.00

Tool Set plus Chest and Cabinet
Save \$411.69

Separate prices
total \$1,310.69
\$899.00



10-Drawer Chest
9-Drawer Cabinet

CONSTRUCTION: Every Craftsman flat wrench, socket, ratchet, ratchet accessory is made from a select molybdenum alloy steel—specially chosen because of its strength and resistance to brittleness. Heat-treated, oil-quenched, tempered for uniform hardness. Nickel-chrome plated to resist rust and corrosion.

OUTFIT COMPOSITION:

1/4-in. Square Drive Parts: Fine-tooth, quick release ratchet; ten 6-pt. sockets (3/32 thru 1/2-in.); nine 12-pt. sockets (3/16 thru 1/2-in.); 5 hex bit sockets (3/16 thru 3/8-in.); eight 6-pt. metric sockets (4 thru 11 mm); 2 screwdriver bit sockets (.030, .039); 2 Phillips bit sockets (Nos. 1, 2); universal joint; socket drive adapter (1/4 to 3/8-in.); 2 socket extensions (4 1/2, 6-in.); 4 1/2-in. flex extension; speeder; 3 extension bars (3, 6, 14-in.); 6-in. flex T-handle; 4 1/2-in. slide bar; flex spinner.

3/8-in. Square Drive Parts: Fine-tooth, quick-release ratchet; eight 6-pt. sockets (3/8 thru 1 1/16-in.); five 8-pt. sockets (1/4 thru 1/2-in.); eight 12-pt. sockets (3/8 thru 1 1/16-in.); nine 12-pt. deep sockets (3/8 thru 7/8-in.); seven 12-pt. flex sockets (3/8 thru 3/4-in.); nine 12-pt. metric sockets (9 thru 19mm); three 6-pt. spark plug sockets (5/8-in. regular, 1 1/16-in. regular; and 1 1/16-in. flex); 6 hex bit sockets (3/32 thru 3/8-in.); 3 screwdriver bit sockets (.030, .039, .055); 3 Phillips bit sockets (Nos. 2, 3, 4); 4 extension bars (3, 6, 10, 20-in.); universal joint; 2 socket drive adapters (3/8 to 1/2-in., 1/2 to 1-in.); ell handle; 16-in. speeder; 7-in. slide bar; 10-in. flex T-handle; crossbar; 10 crowfoot wrenches (3/8 thru 1 in.).

1/2-in. Square Drive Parts: Fine-tooth, quick-release ratchet; thirteen 6-pt. sockets (7/16 thru 1 1/4-in.); sixteen 12-pt. sockets (7/16 thru 1 1/4-in.); twelve 12-pt. deep sockets (1/2 thru 1 1/8-in.); six 12-pt. metric sockets (13 thru 22mm); universal joint; socket drive adapter (1/2 to 3/8-in.); 4 extension bars (3, 6, 10, 20-in.); 2 slide bars (9, 15-in.); ell handle; 18-in. speeder; 2 flex T-handles (15, 18-in.); crossbar.

Wrenches: 16 combination wrenches (1/4 thru 1 1/8-in.); 9 open-end wrenches (1/4x3/16 thru 1 1/16x1 1/8); 11 box-end wrenches (1/4x3/16 thru 1 1/16x1 1/4); 3 short box-end wrenches (3/8x7/16 thru 3/8x3/4); 5 tapset wrenches (3/8x7/16 thru 3/4x7/8-in.); 3 flare nut wrenches (3/8x7/16 thru 3/8x1 1/16); 8-pc. open-end ignition wrench set; 2 adjustable wrenches (8, 10-in.); 5-pc. ratcheting box-end wrench set; 10-pc. combination ignition wrench set.

Miscellaneous Tools: 7 nut drivers (3/16 thru 1/2-in.); variable-size nut driver; 11 standard screwdrivers (3/16x4, 3/16x9, 1/4x4, 1/4x6, 1/4x12, 5/16x1 1/4, 5/16x8, 5/16x12, 1/2x2, 1/2x4, stubby); Reed Prince screwdriver; 7 Phillips screwdrivers (Nos. 0, 1, 4-in. No. 2, 8-in. No. 2; stubby, Nos. 3, 4); offset screwdriver; 4 screwholding drivers (1/8x2 and 4-in., 3/16x5 and 7-in.); 12-in. pick-up tool; bent needle-nose pliers; battery pliers; long chain-nose pliers; ignition pliers; diagonal cutting pliers; Arc Joint® pliers; 2 locking pliers (7 1/2, 10-in.); 3 slip-joint pliers (6 3/4, 8-in., thin-nose); 3 ball-pein hammers (4, 8, 12-oz.); 8-oz. plastic-tip hammer; 14-pc. combination hex-key set; 11-pc. short-arm hex-key set; ignition gauge; brake adjusting tool; hacksaw plus 10 extra blades; rolling wedge bar; stainless steel rule; cotter key extractor; snips; 12-in. line-up punch; 12-pc. punch, chisel set; reversible torque wrench; 59-piece tap and die set.

10-drawer Chest: Same construction as chests on page 69. Drawers 10 3/4 in. front to back. Top center drawer 4 1/2 in. wide, 6 1/8 in. deep. 6 top side drawers 7 7/8 in. wide, 1 1/8 in. deep. 3 drawers 22 1/2 in. wide: two 1 1/8 in. deep, one 2 7/8 in. deep. Tote tray 18 1/2x7 1/2x1 1/2 in. deep. 26x12x19 in. high.

9-drawer Cabinet: Same construction as cabinets on page 69. Drawers 16 3/4 in. front to back. 4 drawers 10 1/2 in. wide, 3 1/8 in. deep. 5 drawers 22 1/4 in. wide: two 3 1/8 in. deep, two 4 3/4 in. deep, one 6 1/16 in. deep. 26 1/2x18x38 3/4 in. high.

ORDERING INFORMATION: See Warranty above.

9 HT 46311N2—Tool Set alone. Wt. 107 lbs. Set \$689.00
9 HT 46368N4—Complete Outfit. Wt. 326 lbs. 899.00

1/2-INCH DRIVE:
41 Standard, 6
Metric Sockets,
14 Accessories

59-PC. TAP
AND DIE SET


137 OTHER
PIECES

1/4-INCH DRIVE:
Parts include 37
standard and 20 metric
sockets, plus 10
accessories

3/8-INCH DRIVE:
Parts include 53
standard and 52 metric
sockets, plus 23
accessories

1/2-INCH DRIVE:
Parts include 44
standard and 31 metric
sockets, plus 12
accessories

Mechanics' Tool Set... the largest we offer.

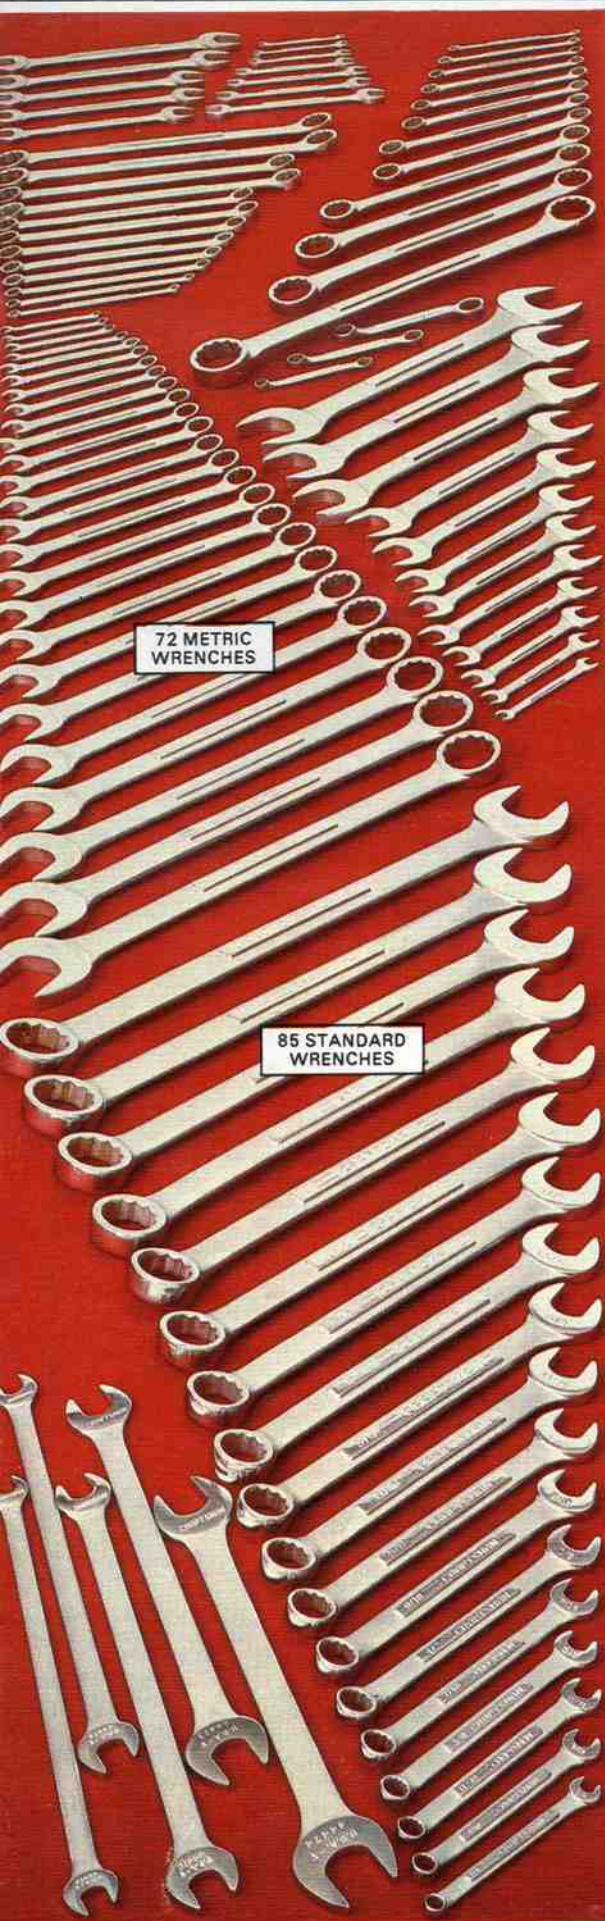

635-PIECE SET

Save \$485.08

Separate prices \$1,199.00
total \$1,684.08

With this wide selection of Standard and Metric tools, it's possible to perform more automotive repairs than with any other set we sell. And you'll never have to pay for replacing any of these tools because they are all backed by our famous Full Unlimited Warranty.

CONSTRUCTION: Every CRAFTSMAN® flat wrench, socket, ratchet and ratchet accessory is made from a select molybdenum alloy steel—specially chosen for its overall toughness and strength. Heat-treated, then oil-quenched and tempered to uniformly “through-harden” tools so there are no inner soft spots. Nickel-chrome plating adds rust and corrosion resistance.

SET COMPOSITION:

1/4-inch Square Drive Parts: Ten 6-point standard sockets (3/32 thru 1/2-inch); nine 6-point standard deep sockets (3/16 thru 1/2-inch); nine 12-point standard sockets (3/16 thru 1/2-inch); nine 6-point metric sockets (4 thru 12 mm); eleven 6-point metric deep sockets (4 thru 14mm); fine-tooth, quick release reversible ratchet; universal joint; socket adapter (3/8-inch); 4 screwdriver bit sockets (Phillips Nos. 1, 2, .030, .039); 5 hex bit sockets (3/16 thru 3/8-inch); flex extension; 6-inch socket extension; 4 extension bars (1 1/2, 3, 6, 14-inch); 6-inch flex T-handle.

3/8-inch Square Drive Parts: Eight 6-point standard sockets (3/8 thru 1 1/8-inch); eight 12-point standard sockets (3/8 thru 1 1/8-inch); five 8-point standard sockets (1/4 thru 1/2-inch); nine 12-point standard deep sockets (3/8 thru 1 1/8-inch); seven 6-point standard flex sockets (3/8 thru 3/4-inch) plus case; two 6-point flex spark plug sockets (3/8, 1 1/8-inch); two 6-point spark plug sockets (3/8, 1 1/8-inch); nine 6-point metric sockets (9 thru 19mm); eleven 12-point metric sockets (9 thru 19mm); eleven 6-point metric deep sockets (9 thru 19mm); ten 6-point metric flex sockets (10 thru 19mm) plus case; fine-tooth, quick-release, reversible ratchet; universal joint; 2 socket adapters (1/4, 1/2-inch); 3 screwdriver bit sockets (.030, .039, .055); quick-release flex ratchet; 5 extension bars (1 1/2, 3, 6, 10, 20-inch); 10-inch flex T-handle; 3 Phillips screwdriver bit sockets (Nos. 2, 3, 4); 6 hex bit sockets (3/16 thru 3/8-inch); 10 crowfoot wrenches (3/8 thru 1-inch).

1/2-inch Square Drive Parts: Thirteen 6-point standard sockets (7/16 thru 1 1/4-inch); six 8-point standard sockets (7/16 thru 3/4-inch); thirteen 12-point standard sockets (7/16 thru 1 1/4-inch); eleven 12-point standard deep sockets (7/16 thru 1 1/4-inch); 13 1/8-inch, 6-point spark plug socket; ten 6-point metric sockets (9 thru 22mm); sixteen 12-point metric sockets (9 thru 32mm); five 12-point metric deep sockets (14 thru 27mm); fine-tooth, quick-release, reversible ratchet; universal joint; socket adapter (3/8-inch); 5 extension bars (2, 3, 6, 10, 20-inch); 2 flex T-handles (15, 18-inch); stud extractor; quick-release, flex ratchet.

Standard Wrenches: 6-piece combination socket and open-end wrench set; 8-pc. open-end ignition wrench set; 10-piece combination ignition wrench set; 3-piece flare nut wrench set; 3 short box-end wrenches (1/2x3/16, 3/8x3/4, 3/4x1 1/2-in.); 12 long box-end wrenches (1/4x3/16 thru 1 1/2x1 1/2-in.); 5 tappet wrenches (3/8x7/16 thru 3/4x1 1/2-in.); 12 open-end wrenches (1/4x3/16 thru 1 1/2x1 1/2-in.); 18 combination wrenches (1/4 thru 1 1/2-in.); 5-piece ratcheting box-end wrench set; 3 adjustable wrenches (6, 8, 10-in.).


Metric Wrenches: 8-piece open-end ignition wrench set; 10-piece combination ignition wrench set; 5-piece flare nut wrench set; 25 combination wrenches (6 thru 32mm); 12 box-end wrenches (6x8 thru 27x30mm); 12 open-end wrenches (6x8 thru 28x30mm).

Miscellaneous Parts: 59-piece tap and die set; 7-piece standard nut-driver set; 7-piece metric nut-driver set; 14-piece standard hex key set; 14-piece metric hex key set; 11-piece standard hex key set; 5-piece magnetic insert set; 16-inch rolling hedge bar; ignition file; 2 half round files (8, 10-inch); 6-inch round file; 10-inch mill file; scratch awl; 8-ounce plastic tip hammer; 3 ball pein hammers (4, 8, 12-ounce); 6-inch rule; ignition gauge; metric feeler gauge; non-magnetic feeler gauge; gap gauge; screwholding starter; offset screwdriver; 7 Phillips screwdrivers (Nos. 0, 1, 2, 2x8, 3, 4, No. 2 stubby); 11 standard screwdrivers (1/8x2, 3/16x4, 3/8x9, 1/2x4, 1/2x6, 1/2x12, 3/4x12, 3/4x18, 3/4x24, stubby); 12-inch pick-up tool; compound leverage snips; 12-inch line-up punch; 12-piece punch and chisel set; cotter key extractor; 1/2-inch square drive torque wrench; bent needle-nose pliers; battery pliers; diagonal cutting pliers; long chain-nose pliers; ignition pliers; 2 locking pliers (7 1/2, 10-inch); thin-nose pliers; slip-joint pliers; 8-inch slip-joint pliers; Arc Joint® pliers; brake adjusting tool; brake spring pliers; gasket scraper; hose clamp pliers and hacksaw with 10 extra blades.

635-piece Mechanics' Tool Set alone.

ORDERING INFO: See CRAFTSMAN® Hand Tool Full Unlimited Warranty above. Shipping weight 171 pounds.
9 HT 46343N Set \$1199.00

CRAFTSMAN HAND TOOL FULL UNLIMITED WARRANTY: If any CRAFTSMAN Hand Tool ever fails to give complete satisfaction, return it to nearest Sears store throughout the U.S. Sears will replace it, free of charge. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

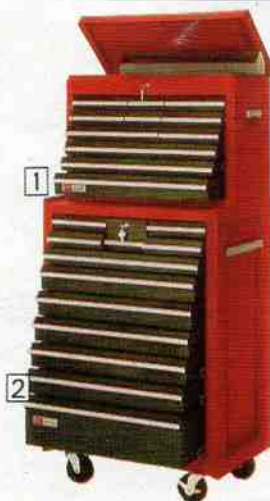

635-Pc. Set at left... plus (1) 12-Drawer Chest, (2) 12-Drawer Cabinet

Save \$541.06

Separate prices \$1,499.00
total \$2,040.06

For full description, see Chest (21) and Cabinet (22) on page 69.

ORDERING INFORMATION: See Warranty above.

Shipping weight 413 lbs.
9 HT 46351N3 \$1499.00



635-Pc. Set at left... plus (1) 12-Drawer Chest, (2) 12-Drawer Cabinet, (3) Mobile Tool Cart

Save \$631.05

Separate prices \$1,599.00
total \$2,230.05

For full description, see Chest (21), Cabinet (22), page 69. See Mobile Tool Cart, item (2), on page 68.

ORDERING INFORMATION: See Warranty above.

Shipping weight 532 lbs.
9 HT 46353N5 \$1599.00

Store, organize and carry more tools with these CRAFTSMAN Tool Chest and Cabinet accessories

YOU CAN DO MORE...



\$52⁹⁹



\$189⁹⁹

(1) CRAFTSMAN Hang on Cabinet Mount on any cabinet on these two pages, or bolt to any flat surface (bolts not included).

CONSTRUCTION: Heavy-gauge steel. Full-length piano-type hinge. Tumbler lock, 2 keys. Red enamel finish.

DIMENSIONS: Cabinet measures 17 $\frac{1}{2}$ x 10 $\frac{1}{2}$ x 29 $\frac{1}{4}$ inches high.

SHELVES: Two steel shelves adjustable at 2-inch intervals. Mount with flat surface up, or turned over with 1 $\frac{1}{2}$ -inch lip on shelf.

ORDER INFO: See "N" suffix, p. 82.
9 HT 65245N—Wt. 32 lbs. . . . \$52.99

(2) CRAFTSMAN Tool Cart carries heavy loads up to 1,000 lbs. Holds any cabinet, pgs. 68, 69 except item (24).

CONSTRUCTION: Heavy-gauge steel. Chrome-plated crossbar. Two 10-in. steel-rimmed ball bearing wheels with solid rubber tires, two 5-in. swivel casters with toe brakes. Wheels as shown or at each corner. Tumbler lock for drawers, cabinet; 2 keys. Red enamel finish.

DIMENSIONS: Measures 43 $\frac{1}{2}$ x 20 $\frac{3}{4}$ x 34 inches high overall. Platform 20 x 29 in. long. Two drawers 12 $\frac{3}{4}$ x 16 $\frac{1}{2}$ x 3 $\frac{3}{4}$ in. deep. Lower compartment 12 $\frac{3}{4}$ x 20 $\frac{3}{4}$ x 16 in. high; front panel slides into cabinet.

ORDERING INFORMATION:
9 HT 65214N2—Wt. 119 lbs. . . . \$189.99

(3) Accessory Door. Fits over left side cavity of 6-drawer through 12-drawer cabinets, opposite page.

CONSTRUCTION: Heavy-gauge steel; perforated. Full-length piano-type hinge. Tumbler lock and 2 keys. Red enamel finish.

DIMENSIONS: 12 $\frac{3}{4}$ x 32 $\frac{1}{2}$ x 3 $\frac{3}{4}$ inches overall.

ORDERING INFORMATION:
9 HT 65248C—Shpg. wt. 6 lbs. . . . \$9.99

(4) Folding Side Shelf. Attach to side or back of any cabinet on these two pages.

CONSTRUCTION: Steel. Holds up to 70 lbs. Collapsible. Support, braces included. Red enamel finish.

DIMENSIONS: 3 $\frac{1}{2}$ -in. edge; 17 $\frac{1}{2}$ x 15 $\frac{1}{2}$ x 14 in. high.

ORDERING INFORMATION:
9 HT 65213—Shpg. wt. 10 lbs. . . . \$16.95

(5) Tool Rack. Steel. Red enamel finish. 17 $\frac{1}{2}$ in. long. Hangs on tool cabinet. No screws needed.

ORDERING INFORMATION:
Shipping weight 1 pound 9 ounces.
9 HT 65216 \$3.95

(6) Protective Mat for Cabinet Top. Black. Embossed vinyl. Measures 17 $\frac{3}{4}$ x 26 $\frac{1}{4}$ inches.

ORDERING INFORMATION:
Shipping weight 1 pound 13 ounces.
9 HT 65221 \$4.79

(7) Drawer Liner. Cork rubber 1/32-in. thick.

ORDERING INFORMATION:

For chests: 22 $\frac{1}{2}$ x 21 $\frac{1}{2}$ in. long. Cutting instructions.

9 HT 65217—Shpg. wt. 9 oz. . . . \$4.89

For cabinets: 16 $\frac{1}{2}$ x 69 in. long. Cutting instructions.

9 HT 65218—Shpg. wt. 1 lb. 3 oz. . . . \$5.19

(8) Socket Organizer. Fits in cabinet drawers.

CONSTRUCTION: Steel. Provides space for U-joints, adaptors, extensions, ratchet handles and flex handles. Holds 96 sockets. 1/4-inch square drive (12-pt.); 3/8-inch square drive (6, 8, 12-pt.); 1/2-inch square drive (6, 12-pt.) in standard and metric sizes.

DIMENSIONS: 22 $\frac{1}{2}$ x 16 $\frac{1}{2}$ x 1 inch overall.

ORDERING INFORMATION:
9 HT 65204C—Shpg. wt. 5 lbs. . . . \$9.99

(9) Parts Tray. Polystyrene. 7 $\frac{1}{4}$ x 13 $\frac{1}{4}$ x 12 $\frac{3}{4}$ inches long.

ORDERING INFORMATION:

9 HT 65211—Shpg. wt. 1 lb. 2 oz. . . . \$1.89

(10) Drawer Dividers. Package of 4. Steel, red enamel finish. Spring-load.



ORDERING INFORMATION:

For chests: 1 $\frac{1}{2}$ x 10 $\frac{1}{2}$ x 32 inches long.

9 HT 7422—Shpg. wt. 1 lb. . . . Pkg. \$2.89

For cabinets: 16 $\frac{1}{2}$ inches long. Two each 1 $\frac{1}{2}$ and 2 $\frac{1}{2}$ inches high.

9 HT 7429—Shpg. wt. 2 lbs. 2 oz. . . . Pkg. \$3.39

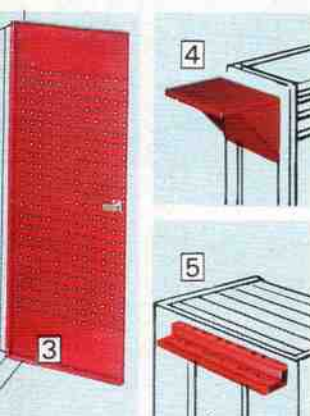

2-drawer Chest
2.7 square feet
for storage

\$57⁹⁹

3-drawer Cabinet
7.7 square feet
for storage

\$104⁹⁹

4-drawer Chest
6.5 square feet
for storage

\$84⁹⁹

5-drawer Cabinet
12.9 square feet
for storage

\$124⁹⁹

(11) 2-drawer Chest

CONSTRUCTION: See features on opposite page.

OVERALL SIZE: Chest measures 26x10 $\frac{1}{2}$ x11 $\frac{3}{4}$ inches high.

DRAWER SIZES: Measures 8 $\frac{3}{4}$ inches from front to back, 22 $\frac{1}{2}$ inches wide. One drawer 21 $\frac{1}{2}$ inches deep, one drawer 31 $\frac{1}{2}$ inches deep.

FINISH: Red and charcoal gray enamel.

ORDER INFO: Wt. 37 lbs.
9 HT 65251C \$57.99

(13) 4-drawer Chest

CONSTRUCTION: See features on opposite page.

OVERALL SIZE: Chest measures 26x12x14 $\frac{1}{8}$ in. high.

DRAWER SIZES: 10 $\frac{3}{4}$ in. front to back, 22 $\frac{1}{2}$ in. wide. Three top drawers 1 $\frac{1}{2}$ in. deep, one bottom drawer 2 $\frac{1}{2}$ in. deep. Top storage compartment.

FINISH: Red and charcoal gray enamel.

ORDER INFO: Wt. 49 lbs.
9 HT 65371L \$84.99

(12) 3-drawer Cabinet

CONSTRUCTION: See features on opposite page.

OVERALL SIZE: Cabinet measures 26 $\frac{1}{2}$ x 18 x 32 $\frac{1}{4}$ in. high.

DRAWER SIZES: 16 $\frac{1}{4}$ in. from front to back, 22 $\frac{1}{4}$ in. wide. Two drawers 3 $\frac{1}{2}$ in. deep, one 6 $\frac{1}{2}$ in. deep. Lower compartment 23 $\frac{1}{2}$ x 17 $\frac{1}{2}$ x 12 $\frac{1}{2}$ in. deep.

FINISH: Red and charcoal gray enamel.

ORDER INFO: Wt. 95 lbs.
9 HT 65053N \$104.99

(14) 5-drawer Cabinet

CONSTRUCTION: See features on opposite page.

OVERALL SIZE: Cabinet measures 26 $\frac{1}{2}$ x 18 x 32 $\frac{1}{4}$ in. high.

DRAWER SIZES: 16 $\frac{1}{4}$ in. from front to back, 22 $\frac{1}{4}$ inches wide. Two drawers 3 $\frac{1}{2}$ inches deep, one drawer 4 $\frac{1}{2}$ inches deep, two drawers 6 $\frac{1}{2}$ inches deep.

FINISH: Red and charcoal gray enamel.

ORDER INFO: Wt. 107 lbs.
9 HT 65054N \$124.99



\$57⁹⁹

(15) 3-drawer Add-on Chest

Fits between chests and cabinets on pages 68 and 69 except under item (23) on page 69.


CONSTRUCTION: Steel. Front panel covers drawers. Tumbler lock with two keys.

DIMENSIONS: Chest measures 26 $\frac{1}{2}$ x 12 $\frac{3}{4}$ x 10 $\frac{1}{2}$ in. high overall. Three drawers each 11x2 $\frac{1}{4}$ x 22 $\frac{1}{2}$ in. wide.

FINISH: Red and charcoal gray enamel.

ORDERING INFORMATION:
Shipping weight 37 pounds.

9 HT 65215C \$57.99



\$49⁹⁹

(16) Six-drawer Tool Caddy

Fits either side of cabinets featured on pages 68 and 69.

CONSTRUCTION: Steel. Full-length drawer pull. Tumbler lock with two keys. Compound drawer slides.

DIMENSIONS: Unit measures 12x9 $\frac{1}{2}$ x 14 $\frac{1}{2}$ in. high overall. Six drawers each 10 $\frac{1}{2}$ x 7 $\frac{1}{2}$ x 1 $\frac{1}{2}$ in. deep.

FINISH: Red and charcoal gray enamel.

ORDERING INFORMATION:
Shipping weight 28 pounds.

9 HT 65205C \$49.99

CRAFTSMAN® Tool Chests and Cabinets

Designed with ample storage space for your tools and the strength needed to move heavy loads

All Chests and Cabinets on these two pages are constructed of reinforced heavy-gauge steel, strong enough to withstand heavy loads. Full-width drawer pulls allow for easier grasping to pull drawers straight out when loaded full of heavy tools. Both Chests and Cabinets lock with tumbler lock with two keys. Recessed side handles, except Chest (23), allow for convenient movement of Chests and Cabinets

Chest tops, except Chest (23), have flexible rods for hanging manuals, blue-prints. A lift-out tote tray in Chests, except Chest (11), lets you carry needed tools directly to your working area. Chest drawers automatically lock when you close lid

Cabinets have rugged 1-piece top and bottom construction that won't loosen or sag. One-piece roll-formed drawer slides with triple-welded supports maintain frame alignment; drawers slide smoothly. Sturdy self-reinforcing recessed sides add strength and stability. Cabinets constructed with two fixed rear casters, two front swivel casters with toe brake

Four cabinet corner posts add extra bracing that firms the sides and gives support to the drawer slides, so they remain aligned under stress. Tests showed that the sturdy "I-frame" design withstands 50% more diagonal stress than flat panel design



5-drawer Chest
6.5 square feet
for storage

\$89⁹⁹

8-drawer Cabinet
20.7 square feet
for storage

\$179⁹⁹

(17) 5-drawer Chest
CONSTRUCTION: See above.
OVERALL SIZE: Chest measures 26x12x14⁷/₈ inches high.
DRAWER SIZES: 10³/₄ inches from front to back. Top center drawer 4³/₈ inches wide, 1⁷/₈ inches deep. Two top side drawers 7⁷/₈ inches wide, 1⁷/₈ inches deep. One drawer 22¹³/₁₆ inches wide, 2¹³/₁₆ inches deep. Bottom drawer 22¹³/₁₆ inches wide, 3¹³/₁₆ inches deep. Removable tote tray 18¹/₂x7¹/₄x1¹/₂ inches deep.
FINISH: Red and gray enamel.
ORDERING INFORMATION:
Shipping weight 54 lbs.
9 HT 65254L.....\$89.99

(18) 8-drawer Cabinet
CONSTRUCTION: See above.
OVERALL SIZE: Cabinet measures 26¹/₂x18x40¹/₁₆ inches high.
DRAWER SIZES: Seven drawers measure 16³/₄ inches from front to back, 22¹/₂ inches wide, 3³/₈ inches deep. One bottom drawer measures 16³/₄ inches from front to back, 22¹/₂ inches wide, 6⁷/₁₆ inches deep.
FINISH: Red and gray enamel.
ORDERING INFORMATION:
Shipping weight 129 lbs.
9 HT 65247N.....\$179.99

8-drawer Chest
8.8 square feet
for storage

\$109⁹⁹

(19) 8-drawer Chest
CONSTRUCTION: See above.
OVERALL SIZE: 26x12x14⁷/₈ in.
DRAWER SIZES: 10³/₄ in. front to back. Two top center drawers 4³/₈ in. wide, 1⁷/₈ in. deep. Two top side drawers 7⁷/₈ in. wide, 1⁷/₈ in. deep. 1 drawer 22¹³/₁₆ in. wide, 1⁷/₈ in. deep. 1 bottom drawer 22¹³/₁₆ in. wide, 2¹³/₁₆ in. deep.
FINISH: Red and gray enamel.
ORDER INFO: Wt. 60 lbs.
9 HT 65255N.....\$109.99

(20) 6-drawer Cabinet
CONSTRUCTION: See above.
OVERALL SIZE: 26¹/₂x18x39³/₄ in.
DRAWER SIZES: 16³/₄ in. front to back. 2 top drawers 10¹/₂ in. wide, 3¹/₈ in. deep. 4 drawers 22¹/₄ in. wide; three 3¹/₈ in. deep, one 6⁷/₁₆ in. deep. Lower compartment 23¹/₂x17¹/₈x12¹/₂ in. deep.
FINISH: Red and gray enamel.
ORDER INFO: Wt. 130 lbs.
9 HT 65056N.....\$157.99

5-drawer Cabinet (not shown). As above, except only 1 top drawer 22¹/₄ in. wide, 3¹/₈ in. deep.
ORDER INFO: Wt. 125 lbs.
9 HT 65055N.....\$147.99

6-drawer Cabinet
12.7 square feet
for storage

\$157⁹⁹

12-drawer Chest
9.5 square feet
for storage

\$137⁹⁹

(21) 12-drawer Chest
CONSTRUCTION: See above.
OVERALL SIZE: Chest measures 26x12x19 inches high.
DRAWER SIZES: 10³/₄ in. front to back. Six top side drawers 7⁷/₈ in. wide, 1⁷/₈ in. deep. Three top center drawers 4¹/₂ in. wide, 1⁷/₈ in. deep. Three drawers 22¹/₂ in. wide; two 1⁷/₈ in. deep, one 2¹/₈ in. deep. Removable tote tray 18¹/₂x7¹/₄x1¹/₂ in.
FINISH: Red and gray enamel.
ORDERING INFORMATION:
Shipping weight 77 lbs.
9 HT 65258N.....\$137.99

(22) 12-drawer Cabinet
CONSTRUCTION: See construction features above.
OVERALL SIZE: Cabinet measures 26¹/₂x18x38³/₄ in. high.
DRAWER SIZES: 16³/₄ in. from front to back. Four top side drawers 7⁷/₈ in. wide, 2 inches deep. Locking top center drawer 4³/₈ in. wide, 4³/₈ in. deep. Seven drawers 22¹/₄ in. wide; one 2¹/₈ in. deep, five 3¹/₈ in. deep, one 6⁷/₁₆ in. deep.
FINISH: Red and gray enamel.
ORDERING INFORMATION:
Shipping weight 165 lbs.
9 HT 65022N.....\$217.99

12-drawer Cabinet
22.2 square feet
for storage

\$217⁹⁹

This Chest and Cabinet offer 50% more square feet of storage capacity for your tools and accessories than with items (21) and (22)

12-drawer Chest
17 square feet
for storage

\$239⁹⁹

10-drawer Cabinet
31.5 square feet
for storage

\$329⁹⁹

(23) 12-drawer Chest
CONSTRUCTION: See features above.
OVERALL SIZE: 33¹/₄x15³/₄x18³/₄ in. high.
DRAWER SIZES: 14¹/₄ in. from front to back. Six top side drawers 11 in. wide, 1³/₄ inches deep. Three top center drawers 5¹/₁₆ in. wide, 1³/₄ in. deep. Three drawers 29¹/₁₆ in. wide; two 1³/₈ in. deep, one 2¹/₂ in. deep. Removable tote tray 18¹/₂x7¹/₄x1¹/₂ in. deep.
FINISH: Red and charcoal gray enamel.
ORDERING INFORMATION: Wt. 132 lbs.
9 HT 65259N.....\$239.99

(24) 10-drawer Cabinet
CONSTRUCTION: See features above.
OVERALL SIZE: 34x18x41¹/₄ inches high.
DRAWER SIZES: 16³/₄ inches from front to back, 27¹/₈ in. wide. Four drawers 1³/₄ in. deep, five drawers 2⁷/₈ in. deep, one 6¹/₄ in. deep.
FINISH: Red and charcoal gray enamel.
ORDERING INFORMATION: Wt. 184 lbs.
9 HT 65041N.....\$329.99

Sears Has a Credit Plan to Suit Most Every Need See Big Book or ask for details

CRAFTSMAN® Machinists' Tool Chests and Cabinets ... built strong for rugged, professional use



8-drawer Chest
\$6975

2-drawer Chest
\$4499

7-drawer Cabinet
\$18999

(1) 8-drawer Chest
OVERALL SIZE, CAPACITY: 27 $\frac{1}{2}$ x8 $\frac{1}{2}$ x13 $\frac{1}{2}$ inches high. Drawers 7 $\frac{1}{4}$ inches front to back. Top center drawer is 5 $\frac{1}{4}$ x3 $\frac{1}{4}$ inches deep; 4 drawers are 8 $\frac{1}{2}$ x1 inch deep; one drawer is 8 $\frac{1}{2}$ x2 inches deep. Two drawers 24 $\frac{1}{2}$ inches wide; one 1 $\frac{1}{2}$ in. deep, other 2 $\frac{1}{4}$ inches deep.
CONSTR.: Heavy-gauge steel with side handles. Full-length hinge. Front panel pulls out and covers drawers. Tumbler lock, 2 keys. Brown wrinkle finish. Nylon felt-lined drawers, exc. top, center.
ORDERING INFO: Shipping weight 40 lbs.
9 HT 65228L...\$69.75

2-Chest and Cabinet Set. Includes (1), (2) and (3) above.
ORDERING INFORMATION: *Separate prices total \$309.73.*
9 HT 65301N3—Shipping weight 203 pounds...Set \$279.99



Cabinets (3) and (5) have 20% more diagonal strength than cabinets on previous 2 pages—that's the kind of strength needed for moving to and from the job site when loaded with heavy tools.

6-drawer Chest
\$9999

4-drawer Cabinet
\$15999

(4) 6-drawer Chest
OVERALL SIZE, CAPACITY: 26x12x14 $\frac{1}{2}$ in. high. Drawers 10 $\frac{1}{4}$ in. front to back. Five drawers 1 $\frac{1}{2}$ in. deep; one 4 $\frac{1}{2}$ in. wide, two 7 $\frac{1}{2}$ in. wide, two 22 $\frac{1}{2}$ in. wide. One drawer is 2 $\frac{1}{2}$ in. deep, 22 $\frac{1}{2}$ in. wide. Removable tote tray is 18 $\frac{1}{2}$ x7 $\frac{1}{2}$ x1 $\frac{1}{2}$ in. deep.
CONSTRUCTION: Heavy-gauge steel, side handles. Full-length hinge. Front panel covers and locks. Tumbler lock, 2 keys. Brown wrinkle finish.
ORDERING INFORMATION: 9 HT 65325L—Shpg. wt. 56 lbs. \$99.99

(5) 4-drawer Cabinet
OVERALL SIZE, CAPACITY: 29x18x35 $\frac{1}{2}$ in. high. 4 drawers 16 $\frac{1}{4}$ in. front to back, 22 $\frac{1}{4}$ in. wide; two 1 $\frac{1}{2}$ in. deep, one 3 $\frac{1}{2}$ in. deep, one 6 $\frac{1}{16}$ in. deep. Lower compartment 28 $\frac{1}{2}$ x17 $\frac{1}{2}$ x12 $\frac{1}{2}$ in. deep... front panel slides into cabinet.
CONSTRUCTION: Heavy-gauge steel, side handles. Tumbler lock, 2 keys. 4 casters. Brown wrinkle finish.
ORDERING INFORMATION: 9 HT 65323N—Wt. 111 lbs. \$159.99

Chest and Cabinet Set
Includes (4) and (5) above.
ORDERING INFO: *Set, prices total \$259.98. Shipping weight 167 pounds.*
9 HT 65302N2...Set \$239.99



(9) New at Sears... 6-drawer Porta-Box \$3999

OVERALL SIZE, CAPACITY: Top compartment 10 $\frac{1}{4}$ x8 $\frac{1}{2}$ x3 $\frac{1}{4}$ in. deep. Drawer sizes: 7 $\frac{1}{4}$ in. front to back. Three 9x1 in. deep, one 9x1 $\frac{1}{2}$ in. deep, one 9x2 $\frac{1}{2}$ in. deep.
CONSTRUCTION: Heavy-gauge steel. Top handle. Spring retainer pulls out for ease of drawer removal. Rayon/wool felt-lined drawers. Front panel pulls out, covers drawers. Tumbler lock, 2 keys. Brown wrinkle finish.
ORDERING INFORMATION: 9 HT 65073C—Shipping weight 15 pounds...\$39.99

11-drawer Chest
\$8999



7-drawer Chest
\$5475



2-drawer Chest
\$3999



(6) New at Sears... 11-drawer Chest
OVERALL SIZE, CAP.: Top compartment 25 $\frac{1}{2}$ x8x3 $\frac{1}{2}$ in. deep. Drawer sizes: 7 $\frac{1}{4}$ in. front to back. Six 8 $\frac{1}{2}$ x1 in. deep; one each: 5 $\frac{1}{2}$ x4 $\frac{1}{2}$ in. deep, 8 $\frac{1}{2}$ x2 in. deep, 24 $\frac{1}{2}$ x1 $\frac{1}{2}$ in. deep, 24 $\frac{1}{2}$ x2 $\frac{1}{2}$ in. deep, 24 $\frac{1}{2}$ x3 in. deep.
CONSTR.: Heavy-gauge steel. Top, 2 side handles. Full-length hinge. Spring, drawer retainer. 9 dividers. Front panel pulls out, covers rayon/wool felt-lined drawers. Tumbler lock, 2 keys.
ORDERING INFORMATION: 9 HT 65074L—Shpg. wt. 53 lbs. \$89.99

(7) 7-drawer Chest
OVERALL SIZE, CAP.: 20 $\frac{1}{2}$ x8 $\frac{1}{2}$ x13 $\frac{1}{2}$ in. high. Drawer sizes: 7 $\frac{1}{4}$ in. front to back. Four 8 $\frac{1}{2}$ in. wide, 1 in. deep. Two 18 $\frac{1}{2}$ in. wide; 1 $\frac{1}{2}$ in. and 2 $\frac{1}{4}$ in. deep. One 8 $\frac{1}{2}$ in. wide, 2 in. deep.
CONSTR.: Heavy-gauge steel. Top handle. Full-length hinge. Front panel pulls out, covers drawers. Tumbler lock, 2 keys. 2 drawbolt latches. Brown wrinkle finish. Nylon felt-lined drawers.
ORDERING INFORMATION: 9 HT 65227C—Shpg. wt. 32 lbs. \$54.75

(8) 2-drawer Chest
OVERALL SIZE, CAPACITY: 21 $\frac{1}{2}$ x9 $\frac{3}{4}$ x7 $\frac{1}{4}$ in. high. Drawers 9 $\frac{3}{4}$ in. front to back, 17 $\frac{1}{2}$ in. wide; one 1 $\frac{1}{4}$ in. deep, one 3 $\frac{1}{2}$ in. deep.
CONSTRUCTION: Heavy-gauge steel. Side handles. Tumbler lock, 2 keys. Brown wrinkle finish.
ORDERING INFORMATION: 9 HT 65321C—Shpg. wt. 20 lbs. \$39.99

CRAFTSMAN® Tool Carts hold up to 1/2-ton of tools

(10) CRAFTSMAN Tool Cart with two drawers and lower compartment
OVERALL SIZE: 43 $\frac{1}{2}$ x20 $\frac{3}{4}$ x29 inches high without wheels.
CONSTRUCTION: Heavy-gauge steel. Chrome-plated crossbar. Two 10-in. steel-rimmed ball bearing wheels, solid rubber tires, two 5-in. swivel casters, toe brakes. Wheels can be mounted as shown or at each corner. Tumbler lock, 2 keys... drawers, cabinet lock simultaneously. Red.
PLATFORM SIZE: 20x29 inches long.
DRAWER SIZES: 2 drawers 12 $\frac{1}{2}$ x16 $\frac{1}{2}$ x3 $\frac{3}{4}$ in. high. Lower compartment 12 $\frac{1}{2}$ x16 $\frac{1}{2}$ x16 in. high... front panel slides into cabinet.
ORDERING INFORMATION: Will not hold cabinet (9 HT 65041).
9 HT 65214N2—Wt. 119 lbs. \$189.99

(11) CRAFTSMAN Tool Cart without drawers
SIZE: 27 $\frac{1}{2}$ x58 $\frac{1}{2}$ x9 in. high.
CONSTR.: Heavy-gauge steel. Two 10-in. steel-rimmed ball bearing wheels with solid rubber tires, two 5-in. swivel casters with toe brakes. Wheels can be mounted as shown or midpoint at front, back and sides. Charcoal gray enamel finish.
PLATFORM SIZE: Measures 27x58 inches long. Edge 1 $\frac{1}{2}$ inches high.
ORDERING INFORMATION: Order handle (12) for this cart separately at right. Holds one or two cabinets depending on size.
Shipping weight 100 pounds.
9 HT 65202N...\$159.99



(12 and 13) Drill holes in cabinets or cart to mount. Mounting bolts included.
(12) Handle for tool cart (11)
Nickel-plated tubular steel 31 in. high, 17 $\frac{1}{2}$ in. wide.
ORDERING INFO: Shpg. wt. 7 lbs. 12 oz.
9 HT 65243...\$18.99
(13) Cabinet Handles
Fit cabinets on this and previous 2 pages. Nickel-plated steel, 8 $\frac{1}{2}$ in. high.
ORDER INFO: Wt. 1 lb.
9 HT 65244...\$3.99



Cart with drawers holds one cabinet
\$18999

Cart without drawers holds up to two cabinets without handle
\$15999

These **CRAFTSMAN®** Tool Boxes have full-length hinges with staked pins for strength and security... watershed ridge over hinge helps keep water out and adds rust resistance



(1 and 2) Cantilever Tool Boxes

(1) Single-cover with 4 cantilever trays; for tools to 16 in.
SIZE: Overall measure 16 $\frac{1}{2}$ x8 $\frac{1}{2}$ x10 $\frac{1}{2}$ inches high. Four red trays are each 15 $\frac{1}{2}$ x3 $\frac{1}{2}$ x1 $\frac{1}{4}$ inches deep.
CONSTRUCTION: Hip-roof design. Heavy-gauge steel, gray baked enamel finish with red trays. Two trays partitioned. Polyethylene handle. Full-length hinge. Combination drawbolt with padlock eye.
ORD. INFO: Wt. 11 lbs. 8 oz. 9 HT 65351\$22.75

(2) Double-cover with 4 cantilever trays; takes tools up to 17 in. long
SIZE: Overall 18x10x13 $\frac{1}{4}$ in. high. Four trays, each 15 $\frac{1}{2}$ x3 $\frac{1}{2}$ x1 $\frac{1}{4}$ in. deep.
CONSTRUCTION: Hip-roof design. Heavy-gauge steel. Gray baked enamel finish with red trays. Two trays partitioned, 2 with covers. Plastisol-coated steel handle. Full-length hinges. Reinforcing skids on bottom. 2 drawbolt latches, padlock eye.
ORDER INFO: Wt. 21 lbs. 9 HT 6536C\$32.75

(3 thru 5) Mechanics' Flat-top Tool Boxes

(3) Takes tools up to 16 inches long; with non-partitioned tray
SIZE: Overall measure 17x7x7 $\frac{1}{2}$ inches high. Red enamel tray is 16 $\frac{1}{2}$ x6x1 $\frac{1}{2}$ inches deep.
CONSTR.: Heavy-gauge steel. Gray baked enamel finish box, red enamel tray. Polyethylene handle. Full-length hinge. Combination drawbolt latch, padlock eye.
ORDERING INFO: Shpg. wt. 7 lbs. 9 HT 65013 ..\$12.79

(4) Takes tools up to 19 in. with partitioned tote tray
SIZE: 20x8 $\frac{1}{2}$ x9 $\frac{1}{2}$ inches high. Tray 19 $\frac{1}{2}$ x7 $\frac{1}{2}$ x2 inches deep.
CONSTRUCTION: Heavy-gauge steel. Gray enamel finish box with red enamel tray. Polyethylene handle. Full-length hinge. 2 drawbolt latches, welded center hasp with padlock eye.
ORDERING INFORMATION: 9HT6512-Wt. 12 lbs. 8 oz. \$16.25
 As above, except takes tools up to 17 in. long. 18x8x9 in. high. Tray 17 $\frac{1}{2}$ x6 $\frac{1}{2}$ x1 $\frac{1}{4}$ in. deep. Shpg. wt. 10 lbs. 8 oz. 9 HT 6500\$13.79

(5) Our best Tool Box takes tools up to 23 inches long; with partitioned tote tray
SIZE: 24 $\frac{1}{2}$ x9 $\frac{1}{2}$ x9 $\frac{1}{2}$ inches high. Tray measures 23 $\frac{1}{2}$ x8 $\frac{1}{2}$ x2 $\frac{1}{4}$ inches deep.
CONSTRUCTION: Heavy-gauge steel with red baked enamel finish. Plastisol-coated steel top handle, steel side handles. Full-length hinge. Three drawbolt latches... center one with lock and 2 keys.
ORDERING INFORMATION: Shipping weight 21 pounds. 9 HT 65141C\$31.99



(6) Box for $\frac{3}{4}$ -in. drive tools

Takes tools up to 20 inches long.
SIZE: Measures 20 $\frac{1}{2}$ x6x3 $\frac{3}{4}$ inches high.
CONSTRUCTION: Heavy-gauge steel, gray baked enamel finish. Nickel-plated steel front handle. Full-length hinge. Two drawbolt latches.
ORDERING INFO: Shpg. wt. 6 lbs. 12 oz. 9 HT 6506\$10.99

(7) Takes tools up to 13 $\frac{1}{2}$ in. long. Put this compact box in your vehicle with tools for emergency repairs.
SIZE: 14 $\frac{1}{4}$ x7 $\frac{1}{2}$ x3 $\frac{1}{4}$ in. high.
CONSTR.: Heavy-gauge steel, red enamel finish. Plastic top handle. Full-length hinge. Latch.
ORDERING INFO: Shpg. wt. 3 lbs. 6 oz. 9 HT 65014 ..\$5.99

(8) Takes tools up to 19 in. long; partitioned tote tray
SIZE: Overall: 19 $\frac{1}{2}$ x7x8 in. high. Tray 19x6 $\frac{1}{2}$ x2 $\frac{1}{2}$ in. deep.
CONSTRUCTION: Heavy-gauge steel. Gray baked enamel finish box, red tray. Polyethylene handle. Full-length hinge. 2 drawbolts, padlock eye.
ORDER INFO: Wt. 9 lbs. 8 oz. 9 HT 6520\$13.75
Compact Box. As (8), but 19 $\frac{1}{2}$ x6x6 in. Tray 19x5 $\frac{1}{2}$ x1 $\frac{1}{4}$ in. deep. Combination drawbolt. 9HT65161-Wt. 7 lbs. 8 oz. \$9.79

(9) Carpenters' Box

Designed for tools up to 29 in.; partitioned tray
SIZE: 30x8 $\frac{1}{2}$ x9 $\frac{1}{2}$ in. high. Tray 29 $\frac{1}{2}$ x7 $\frac{1}{2}$ x1 $\frac{1}{2}$ in. deep.
CONSTRUCTION: Heavy-gauge steel. Gray baked enamel box, red tray. Reinforced corners. Plastisol-coated steel top handle, steel side handles. Knock-out plug for square, clip for 2 hand saws. Full-length hinge. Three drawbolt latches... center one locks; 2 keys.
ORDER INFO: Wt. 19 lbs. 9 HT 6517C\$27.75

Helps take the strain out of carrying a lot of tools. Handle detaches for storing in the trunk of your car. Secure tool boxes tightly by attaching bottom of box with bolts, included, to cart.
CONSTRUCTION: Tubular steel construction with red enamel finish. Two $\frac{5}{8}$ -inch plastic wheels. Holds boxes measuring up to 10 inches wide and 30 inches long.
ORDERING INFORMATION: Box not included. Not Craftsman. Shpg. wt. 8 lbs. 9 HT 65203C\$19.99

(7 and 8) Hip-roof Tool Boxes

CRAFTSMAN® Tool Chests

Reinforced bottom and sides handle big loads without sagging, loosening



(11) Competition Chest

With 2 drawers, cantilever tray
SIZE: 20 $\frac{1}{2}$ x8 $\frac{1}{2}$ x10 $\frac{1}{2}$ in. high. 2 drawers, each: 18 $\frac{1}{2}$ x7 $\frac{1}{2}$ x2 $\frac{1}{2}$ in. deep. Top compartment 3 $\frac{1}{4}$ in. deep... cantilever tray 19 $\frac{1}{2}$ x3 $\frac{1}{2}$ x1 $\frac{1}{4}$ in. deep.
CONSTR.: Heavy-gauge steel. Baked black wrinkle finish, red tray. Wood-grained vinyl on drawers, top. Polyethylene handle. Full-length hinge. Drawers lock. 2 drawbolt latches, tumbler lock, 2 keys.
ORDER INFO: Wt. 19 lbs. 9 HT 6530C\$33.99

(12 and 13) Mechanics' Chests

(12) With two drawers
SIZE: Overall measures 20x8 $\frac{1}{2}$ x9 $\frac{1}{2}$ inches deep. 2 drawers, each 17 $\frac{1}{2}$ x7 $\frac{1}{2}$ x2 $\frac{1}{2}$ in. deep. Top compartment measures 2 $\frac{1}{2}$ inches deep.
CONSTR.: Heavy-gauge steel. Gray baked enamel finish. Polyethylene handle. Full-length hinge. Drawers lock when lid is closed. 2 drawbolt latches and padlock hasp.
ORDER INFO: Wt. 18 lbs. 9 HT 65334C\$27.75

(13) Our best portable chest with two drawers, partitioned tote tray
SIZE: 20x8 $\frac{1}{2}$ x9 $\frac{1}{2}$ in. deep. 2 drawers, each: 17 $\frac{1}{2}$ x7 $\frac{1}{2}$ x2 in. deep. Tote tray 18 $\frac{1}{2}$ x6 $\frac{1}{2}$ x1 $\frac{1}{2}$ in. deep.
CONSTR.: Heavy-gauge steel. Gray, red baked enamel finish. Polyethylene handle. Full-length hinge. Drawers lock when lid is closed. 2 drawbolt latches, tumbler lock, 2 keys.
ORDER INFO: Wt. 20 lbs. 9 HT 65336C\$37.75



Our largest CRAFTSMAN® Tool Box

Heavy-duty maintenance equipment box with over 4 cubic feet of storage space
 With partitioned tote tray... box takes tools, equipment up to 39 inches long
SIZE: 40 $\frac{1}{2}$ x16 $\frac{1}{2}$ x12 $\frac{1}{2}$ inches high. Tray measures 20x8 $\frac{1}{2}$ x9 $\frac{1}{2}$ inches deep.
CONSTR.: Heavy-gauge steel, gray baked enamel finish. Heavy-duty bolted steel side handles; 3 butt hinges. Steel chain stops. Padlock hasp and eye.
ORDER INFO: See "N" suffix note on page 82. 9 HT 65242N-Shpg. wt. 64 lbs.\$89.99



(1) **Work Light.** Clamp on workbench or mount on wall (brackets for each included).

CONSTRUCTION: 34-inch long heavy-gauge steel arm with spring-tension control. Vented aluminum shade. Black enamel finish . . . white inside shade.

ELECTRICAL INFO: 6-foot, 2-wire cord. Takes 60-watt bulb (not included). 110-120-volt, 60 Hz. AC. UL listed.

ORDERING INFORMATION:
9 HT 2488—Wt. 3 lbs. 10 oz. . . \$19.99

(2) **Workbench Stool**

FRAME: 16-gauge steel. Gray enamel finish. Steel glide feet.

SEAT: Pressboard. 14x14½x26 in. high.

ORDERING INFO: Unassembled.

9 HT 10287C—Shpg. wt. 10 lbs. \$16.95

(3) **Workbench Stool with back**

FRAME, BACK: 16-ga. steel. Back bolted to sturdy support. Gray enamel finish. Rubber feet, steel glides. 37 in. high.

SEAT: Pressboard. 14x14½ inches wide. 26 inches high.

ORDER INFO: If mailed, takes 15 lb. rate. See parcel post info., p. 82. Unassembled.

9 HT 10286L—Shpg. wt. 14 lbs. \$24.50



(4) **Shelf-style Workbench**
\$42.99



(5) **Crossbraced Bench Legs**

(4) **Shelf-style Workbench**

TOP: 2x5 ft. long, 1 in. thick. Flakeboard top.

FRAME: 16-gauge steel legs. Baked charcoal gray enamel finish. Stands 32½ in. high. Holds 2 drawers (9 HT 10326) sold on p. 22.

ORDER INFO: Unassembled. See "N" suffix note, p. 82. Shpg. wt. 69 lbs.

9 HT 10279N . . . \$42.99

(5) **Bench Legs**

CONSTR.: 18-gauge steel. Legs 32 in. high, crossbraces 20¼ in. long.

ORDER INFO: Unassembled. Shpg. wt. 18 lbs.

9 HT 1022C . . . Set \$19.50

Steel Workbench 5-ft. top

\$79.95



Drawers for (6)

\$33.95

(6) **All-steel Workbenches**

TOP: 12-gauge steel. Measures 29 inches wide.

FRAME: 12-ga. steel. Legs can hold electrical outlet. Legs molded to hold conduit. 33½ in. high. Enamel finish.

ORDER INFO: Unassembled. See shipping note below.

F9 HT 10281N—5-ft. long top. Wt. 103 lbs. . . . \$79.95

F9 HT 10282N—6-ft. long top. Wt. 131 lbs. . . . 87.95

(7 and 8) **Steel drawers for (6).**

Steel frame. 6¼x23¼x15 in. wide. Latch, padlock hasp, hardware.

ORDERING INFO: See shipping note below.

(7) **Mounts to workbench frame only.**
F9 HT 10283—Shipping weight 29 lbs. . . Each \$33.95

(8) **Mounts under drawer (7) only.**
F9 HT 10284—Shipping weight 20 lbs. . . Each \$33.95

SHPG. NOTE: "F" items (as F9 HT 10283) from factory in Aurora, Ill. Tatamy, PA. or Dallas, TX. Pay shipping charges from your Dist. Center. "N" items with "N" suffix (as F9 HT 10281N) pay motor carrier from fcty. Allow time. No C.O.D.'s.



Workbench, 4 drawers, cabinet

\$289.95

(9) **Workbench with 4 drawers, cabinet.**

TOP: 12-ga. steel. 6 ft. x 30 in. 4 in. backrail.


FRAME: 12-gauge steel. Front channels can conceal conduit. Recessed lower shelf. 34 in. high. Gray enamel finish.

DRAWERS: Four 12-ga. steel drawers, 23¼x15x6¼ in. deep. Latches, padlock hasps.

CABINET: 12-ga. steel. 27¼x34x15 in. wide. Shelf.

ORDERING INFO: Unassembled. See shpg. note at left. Wt. 244 lbs.

F9 HT 10289N \$289.95



(10 and 11) **Revolving Organizers**

30 hinged-bin organizer | 18-bin organizer

\$16.99 | \$7.99

FRAME: Steel frame revolves on smooth rollers for easy viewing and access. Carrying handle.

BINS: Removable clear plastic bins with sloped front for easy access. Measures 3¾x2¾x2 inches deep.

(10) **30-bin Organizer with hinged lids.**
15 plastic dividers. 16½x14x14 inches deep overall.

ORDERING INFORMATION:
9 HT 65395—Shipping weight 6 lbs. 2 oz. . . . \$16.99

(11) **18-bin Organizer without hinged lids.**
Nine plastic dividers. 11½x14x14 inches deep overall.

ORDERING INFORMATION:
9 HT 65396—Shipping weight 3 lbs. 2 oz. . . . \$7.99



(12 thru 14)

CRAFTSMAN® Organizers

48-drawer | 27-drawer | 15-drawer

\$16.95 | \$10.95 | \$6.95

FRAME: Brown one-piece frame molded of high-impact styrene plastic.

DRAWERS: Clear plastic . . . 2¾x5¾x1¼ in. deep.

SIZES, ORDERING INFORMATION:

Drawers	Dimensions LxWxH in.	Dividers	Catalog Number	Wt. lbs. oz.	Price each
(12)	48 12½x6½x20	40	9 HT 65346C	16 13	\$16.95
(13)	27 10x6½x15	20	9 HT 65343	8 12	10.95
(14)	15 10x6½x8½	20	9 HT 65342	5 8	6.95

(15 thru 18) **Sears Organizers**

60-drawer | 50-drawer | 40-drawer | 32-drawer

\$16.99 | \$15.99 | \$13.95 | \$12.99

FRAME: Metal sides with blue baked enamel finish. Plastic top and bottom. Handle on top of 40 and 32-drawer organizers.

DRAWERS: Clear plastic . . . 2¾x5¾x1¼ in. deep.

SIZES, ORDERING INFORMATION:

Drawers	Dimensions LxWxH in.	Dividers	Catalog Number	Wt. lbs. oz.	Price each
(15)	60 11½x6½x20½	30	9 HT 65357C	13 12	\$16.99
(16)	50 11½x6½x17½	24	9 HT 65352C	11 5	15.99
(17)	40 9¾x6½x17	18	9 HT 65349	9 2	13.95
(18)	32 9¾x6½x13½	18	9 HT 65355	7 7	12.99



(19) **6-bin Organizer mounts on wall or workbench**

Mount vertically or horizontally \$2.99 each

Save 20% when you buy 3 \$7.15

FRAME: Steel mounting panel can be hung on wall or workbench (hardware not included). Measures 19½x4¼x4 inches.

BINS: Removable clear plastic with hinged lids. Can be mounted in horizontal or vertical position. Sloped front for easy access. 3 plastic dividers. 3¾x2¾x2 inches deep.

ORDERING INFORMATION:
Shipping weight 1 pound 3 ounces.

9 HT 65397 . . . Each \$2.99; 3 for \$7.15



(20) **Storage Cabinet mounts on wall or door**

Cabinet with rack | Cabinet alone

\$15.99 | \$12.99

Storage Cabinet with rack.
Provide enclosed storage space for tools and other household supplies.

CONSTRUCTION: Steel frame, Cabinet measures 24x18x5 in. deep with 2 adjustable steel shelves. Two sliding doors made of see-thru, smoke-colored plastic. Tool rack measures 24 in. wide . . . slanted slots for easy tool removal. Overall: 24x27x5 in. high.

MOUNTING: Mount on any wall or door. Includes mounting hardware.

ORDER INFO: Unassembled. Tools are not included.

9 HT 65398C—Wt. 14 lbs. Kit \$15.99

Storage Cabinet without rack
ORDERING INFORMATION:
9 HT 65399C—Wt. 13 lbs. . . \$12.99



(21 and 22) **Shelf Organizers**

3 shelves, 20-drawers | 2 shelves, 50-drawers

\$14.99 | \$26.99

CONSTRUCTION: Steel shelves, frame . . . gray enamel finish. Shelves, 28½x7 in. See-thru plastic drawers 2¾ in. wide, 5¾ in. long . . . small drawers 1¼ in. high; large drawers 2 in. high. Overall: 30x7x22½ inches high.

ORDER INFO: Unassembled. Tools not included.

(21) **Shelf Organizer with 3 shelves, 20 drawers.**
10 small, 10 large drawers.
9 HT 65347C—Wt. 13 lbs. \$14.99

(22) **Shelf Organizer with 2 shelves, 50 drawers.**
30 small, 20 large drawers. Adjustable center shelf.

9 HT 65356C—Wt. 22 lbs. \$26.99



Steel Storage Cabinet

Hang on the wall over your workbench **\$59⁹⁹**

Lock your tools while using wasted wall space over your workbench or hobby area.

CONSTRUCTION: 24-gauge steel. Double-wall doors and back perforated on inside wall to hold hooks (not included) for hanging small tools and equipment. Three shelves 67 $\frac{1}{2}$ x25 $\frac{1}{2}$ inches long . . . top 2 adjust in height at 2-inch increments. Two doors braced around edges for rigidity. Magnetic door latches on both doors hold them snugly shut. Padlock eye. Red enamel finish.

STORAGE CAPACITY: 3.49 sq. ft. for storage on 3 shelves. 3.35 cubic feet inside with shelves removed.

OVERALL: 26 $\frac{1}{2}$ x9x30 inches high.

ORDERING INFORMATION: See "N" suffix note, page 82. (Tools not included).

9 HT 65246N—Shpg. wt. 31 lbs. . . . **\$59.99**

2x5-FOOT TOP: Shock-absorbent hardboard over flakeboard core . . . 1 inch thick. Provides a solid work surface . . . remains steady while hammering, sanding or sawing. Hardboard on both sides, so it's reversible for longer wear.

STEEL FRAME: Crossbraced 14-gauge steel frame with full side panels for stability. Open back. Stands 32 $\frac{1}{2}$ in. high. Feet adjust $\frac{1}{8}$ in. for leveling on uneven floors. Holds up to 10 drawers (5 on each side), or up to 10 shelves (5 on each side) or a combination of both. Baked charcoal gray enamel finish.

LOCKING STEEL DOOR: Perforated to hold tool hooks. Mount on right or left side of frame on full-length piano-type hinge. Lock with key. Measures 20 $\frac{3}{4}$ x24 $\frac{3}{4}$ inches high. Baked charcoal gray enamel finish. Hardware, tumbler lock, 2 keys.

STEEL SHELVES: Fit either side of frame. Baked charcoal gray enamel finish. 18 $\frac{1}{2}$ x16 $\frac{1}{2}$ in.

STEEL DRAWERS: Fit either side of frame. Red enamel finish. 16 $\frac{1}{2}$ x15 $\frac{3}{4}$ x4 $\frac{7}{16}$ in. deep. Compound-action drawer slides.

13-piece Workbench Outfit includes top and frame, 10 drawers, 2 locking doors

\$139⁹⁷

CRAFTSMAN® Workbench Outfits



\$69⁹⁷

9-piece Workbench Outfit includes top and frame, 5 drawers, 2 shelves and locking door

\$99⁹⁶

(1 thru 3) Workbench Outfits

(1) CRAFTSMAN® 13-pc. Workbench Outfit

Includes top and frame, 2 locking doors, 10 drawers. ORDER INFO: Unassembled. Sep. prices total \$180.97.

Shipping weight 200 lbs. 9 HT 10253N9 . . . **\$139.97**

(2) CRAFTSMAN® 5-pc. Workbench Outfit

Includes top and frame, 2 shelves and 2 drawers. ORDER INFO: Unassembled. Sep. prices total \$84.97.

Shipping weight 118 lbs. 9 HT 10252N5 . . . **\$69.97**

(3) CRAFTSMAN® 9-pc. Workbench Outfit

Includes top and frame, locking door, 2 shelves, 5 drawers. ORDER INFO: Unassembled. Sep. prices total \$126.96.

Shipping weight 154 lbs. 9 HT 10251N9 . . . **\$99.96**

Workbench Accessories

Workbench alone

Includes top and frame. ORDER INFO: Unassembled. Shipping weight 92 pounds. 9 HT 10265N . . . **\$54.99**

Locking Steel Door alone

ORDERING INFORMATION: Shipping weight 9 pounds. 9 HT 10336C . . . **\$10.49**

Steel Shelf alone

ORDERING INFORMATION: Shipping weight 4 pounds. 9 HT 10347C . . . **\$4.49**


Steel Drawer alone

ORDERING INFORMATION: Shipping weight 9 pounds. 9 HT 10326 . . . **\$10.50**

New at Sears

CRAFTSMAN® Portable Work Center

It's a workbench, a sawhorse, and a vise rolled into one compact package — folds flat for easy storage and carrying

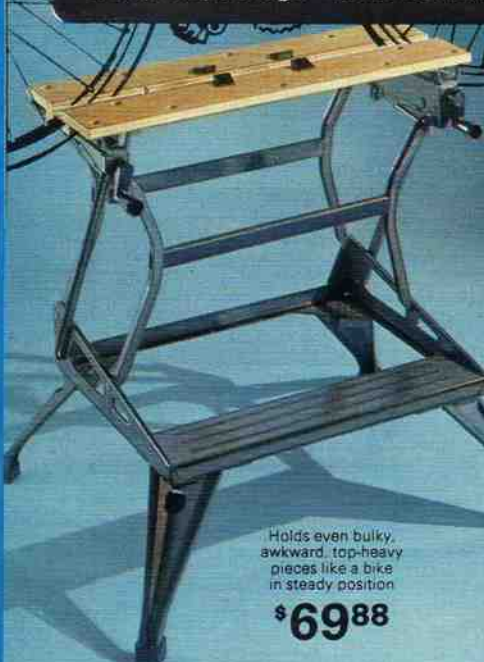

Holds even bulky, awkward, top-heavy pieces like a bike in steady position

\$6988

Swivel pegs hold irregular or circular-shaped pieces tightly in place

Double adjustment levers let you hold wedge-shaped pieces

Folds to suitcase-size—hang on a wall or even in a closet

Our new workbench is completely portable. Perfect for apartment dwellers and other home craftsmen with limited space. Folds flat for storage, but it's so useful and convenient, you may want to leave it set up all the time... it's that handy. Made in Canada.

TOP FRAME: Pressed flakeboard top. Steel frame. Base level step can be used as a footrest for added stability.

VISE: Vise jaws open to 5 inches wide. Double-adjustment levers permit gripping of wedge-shaped pieces. Swivel pegs hold irregular or circular-shaped pieces like pipe secure... even in a vertical position (see view above).

DIMENSIONS. CAPACITY: 31½ inches high. Folds away to 29½x29x7½ inches high. Work table is 15¼ inches wide with vise open, 9¾ inches wide with vise closed. Maximum capacity: work parallel to two swivel grips, 12 inches; work diagonal to two swivel grips, 28 inches. Height of work surface is 31½ inches with legs open, 23½ inches with legs closed. Lightweight and easy-to-carry... weighs only 32 pounds. Supports maximum of 350 pounds.

ORDERING INFORMATION: See "N" suffix note on page 82.

9 HT 28876N—Shipping weight 37 pounds... **\$69.88**

On-the-Site Construction Tool Shed

Gives you security at night—everybody on the crew can leave his tools in the roomy 47½x30x60-inch wide vault overnight. Its special 2-lock system makes it tough to break into and it's too heavy to be easily carted away

New at Sears \$229.99

VAULT: Heavy-duty 16-gauge steel construction throughout. Formed channel stiffening ribs for horizontal reinforcement of sides. Rain gutter around top helps prevent leakage and provides safety stop for open cover. Smooth, rounded edges keep weather outside. Arc-welded seams.

LOCKING COVER: 16-gauge steel. Two different built-in removable padlocks (2 keys each)... special locking system holds tight to protect against forced entry. Full cover protects against leakage and vandalism—opens up for easy access to contents.

HANDLES: Bar handles on ends for firm grip... maximum leverage. Handles stand out when in use, lay down when not in use. Twin handles on cover for easy raising, lowering.

SHELVES: Two 16-gauge steel shelves. Bottom shelf can be folded back out of the way, for additional space.

SKIDS: Steel skids on bottom offer protection, allow easy placement by lift truck.

ORDER INFO: Pay motor carrier charges from factory in Pocatamos, Ar... allow time; no C.O.D.'s. Assembled. F9 HT 65241N—Shipping weight 278 pounds... **\$229.99**

During the day use pull-down door as desk top on job site



Planing, chiseling, and shaping in side vise

Carving... top resists warping from uneven stress

CRAFTSMAN® Woodworker's Bench

Has extra-long 78½-inch clamping capacity

Legs, braces, and top of solid kiln-dried selected maple... steel vise handles

\$279.95

CONSTRUCTION: Solid maple table, legs, crosspieces. Steel vise handles, screws, guide rods. 37x75x33-in. high overall.

WORK SURFACE: 15½x70-in. long. 4 dogs hold two 15½-in. long maple clamping bars in place. Dogs fit into 14 pairs of holes 4½-in. apart on table top, vise. Clamping cap. 78½-in.

END VISE: Reinforced solid maple jaws, 10½-in. vise capacity. 3x5½-inch face. Complete with two guide rods.

SIDE VISE: Maple shoulder design secures workpieces for chiseling, carving, planing and sanding. 5¼-in. capacity.

TOOL TRAY: Maple, 34x8½x2-in. deep. Mounts on side, end.

2 DRAWERS: Maple, pressboard bottom. 14x3½x9½-in. wide.

LEGS: Solid maple. Trellis style with crossbraces. Side-vise end has legs with four supports for lateral stability.

ORDER INFO: Partially assembled. See shipping note below.

T9 HT 10231N—Shipping weight 175 pounds... **\$279.95**

Workbench Stool with back (not shown). 16-gauge steel frame and back 37-in. high. Pressboard seat 26-in. high. Gray.

ORDER INFO: If mailed, takes 15-lb. rate, see page 82.

9 HT 10286L—Shipping weight 14 pounds... **\$24.50**

SHIPPING NOTE: "T" items (as T9 HT 10231N) sent by motor carrier from Chicago, Philadelphia, Atlanta, Dallas, or Los Angeles. Pay shipping charges from your Distribution Center. Allow extra time. C.O.D.'s accepted only for shipment to a Sears store.

Dry Chemical Fire Extinguishers Effective on all 3 fire classes



Class A fires. Burning paper, wood, fabric where water or multi-purpose dry chemical is most effective agent.

Class B fires. Burning flammable liquids (gasoline, oil, paint). Smothering is required.

Class C fires. In electrical equipment. Extinguishing agent must be non-conductor of electricity.

The higher the rating, the more effective on class of fire.

(1 thru 4) UL listed. Meet requirements of Occupational Safety and Health Act (OSHA), Marine Testing Inst., Factory Mutual Research Corporation.

CONSTR.: Professionally refillable. Red epoxy-finished aluminum container, pressure gauge. Pull-pin helps prevent accidental discharge. Rustproof plastic wall hanger.

EXTINGUISHING AGENT: Mono-ammonium phosphate dry-chemical agent. Non-toxic.

(1) **1-A; 10-B:C Extinguisher.** 17x3-inch diameter. Effective on medium-sized fires of all classes.

RANGE: 13 feet for approximately 10 seconds.

ORDER INFO: See fire class info. above, warranty p. 84.

9 HT 5804—Shipping weight 4 lbs. 8 oz. **\$12.99**

(2) **2-A; 40-B:C Extinguisher.** 19x4½-inch diameter. Four times as effective as (1) on B, C fires; twice as effective on A fires.

RANGE: 18 feet for approximately 10 seconds.

ORDER INFO: See fire class info. above, warranty p. 84.

9 HT 5805—Shipping weight 9 pounds **\$22.99**

(3) **4-A; 60-B:C Extinguisher.** 20x5-in. diameter. Six times as effective as (1) on B, C fires; 4 times as effective on A fires.

RANGE: 12 to 20 feet for approximately 10 seconds.

ORDER INFO: See fire class info. above, warranty p. 84.

9 HT 5801C—Shipping weight 19 pounds **\$34.95**

(4) **10-A; 80-B:C Extinguisher.** 23x7-inch diameter. Eight times as effective as (1) on B, C fires; 10 times as effective on A fires.

RANGE: 12 to 20 feet for approximately 10 seconds.

ORDER INFO: See fire class info. above, warranty p. 84.

9 HT 5809C—Shipping weight 37 pounds **\$49.95**

Workshop Work Centers

Buy these workbench/storage components separately or choose complete 3-piece Outfit

1 \$47.99



(1) Portable Roll-about Workshop



48-inch Free-standing Unit
\$74.99

4-sq. ft. Corner Unit
\$16.99


24-inch Free-standing Unit
\$44.99



Save 10%

Buy all 3 units (2 thru 4) shown individually above and as complete outfit at right

Separate prices \$136.97 **\$123.27**

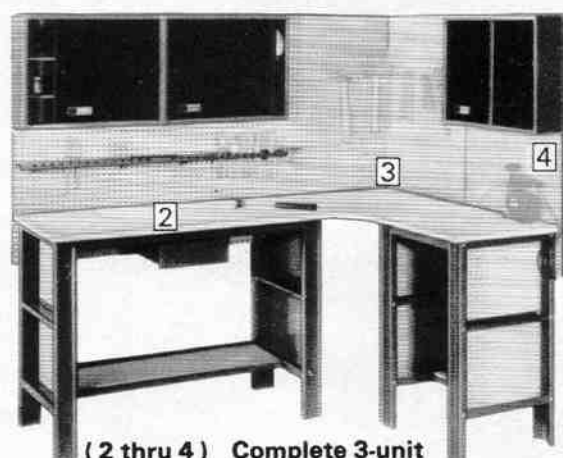

(2 thru 4) Complete 3-unit Stationary Work Center

It has a cabinet, large drawer, adjustable tool rack . . . plus it's on wheels. After use, roll it to its place of storage.

CONSTR.: Frame: Steel. Legs mounted on 2 1/2-in. casters . . . lock in place. 62 in. high. Knockouts on front legs for electrical outlets. Work Surface: 20x30x3/4 in. thick—industrial-grade particle board. Two hinged 9-in. wide side drop panels for work surface of 39 to 48 in. wide. Storage: Sliding-door cabinet, 30x10x5 in. deep. Sliding doors of see-thru, smoke-colored plastic. Drawer mounts under work surface, 12x3x18 in. deep. Perforated hardboard side inserts on legs and back-braced top panel for hanging tools (hooks sold separately below). 10-in. deep bottom shelf. Tool rack with removable drill bit holder.

ORDERING INFORMATION: Sent unassembled.
9 HT 1437L—Shipping weight 68 pounds . . . \$47.99

30-pc. Hook Kit (not shown). Fits 1/4 and 1/8-in. perforated board. Shipping weight 1 pound 4 ounces.
9 HT 75631 . . . Kit \$3.29

(2 and 4) Stationary Work Centers

CONSTRUCTION: Steel. Knockouts on front legs provide for 2-plug electrical outlets. Work Surface: 1-inch thick industrial grade particle board. Storage: Perforated hardboard backstop and side panel inserts provide space for hanging tools (hooks sold separately at left). Sliding-door cabinets, 24x18x5 in. deep, each with 2 adjustable steel shelves. Sliding doors of smoke-colored, see-thru plastic. 10-in. deep bottom shelf. Tool rack (on 48-in. unit only). Overall ht. 72 in.

SIZE, ORDERING INFORMATION: Sent unassembled.

(2) 48-in. Unit. Work surface 48 in. wide, 20 in. deep. Incl. 2 cabinets, 1 drawer, 12x3x18 in. deep, tool rack.
9 HT 1433N—Wt. 95 lbs. \$74.99

(4) 24-in. Unit. Work surface is 24 in. wide by 20 in. deep. Includes 1 sliding door cabinet. Wt. 61 lbs.
9 HT 1432L . . . \$44.99


Extra Drawers for (2) and (4) Steel. 12x3x18 inches deep.
9 HT 1438—Shpg. wt. 3 lbs. . . \$4.99

(3) Corner Unit. Four sq. ft. of work surface plus space for hanging tools. Surface of 1-in. thick industrial grade particle board, perforated hardboard backstop fastens at 90° angle. Mount between 2 stationary units.

ORDERING INFO: Sent unassembled. Wt. 35 lbs.
9 HT 1434L . . . \$16.99

(2-4) Complete 3-Unit Stationary Work Ctr.

ORDERING INFO: Unassembled. Wt. 191 lbs.
9HT14321N3 . \$123.27



(5) Germicon® Cabinet stores safety glasses, goggles and headsets and helps keep them sanitary

Cabinet alone \$169.95

Cabinet with 40 Goggles \$269.95
Cabinet with 30 Glasses, 10 Goggles \$369.95

CONSTRUCTION: Enamel-finished steel cabinet, 30x30x12 in. deep. Double doors with key lock. Five removable shelves with 40 compartments. Germicidal lamp with 15-min. timer, pilot lamp. Reflective aluminum surface for complete irradiation of cabinet.

CAPACITY: Any combination of 40 glasses, goggles or 20 headsets.

ELECTRICAL INFO: 110-120-v., AC. UL listed. 8-foot, 3-wire cord.

ORDER INFO: From Chicago, Philadelphia, Atlanta, Dallas, or Los Angeles. Pay motor carrier from Distribution Center. Allow extra time. See "N" note on page 82.

Germicon® Cabinet alone.
T9HT18601N—Wt. 53 lbs. \$169.95

Cabinet with 40 Dust and Chemical Goggles.
T9HT18603N—Wt. 67 lbs. \$269.95

Cabinet with 30 Safety Glasses and 10 Impact Goggles.
T9HT18602N—Wt. 62 lbs. \$369.95



Save 10% when you buy any 3 or more eye and face protectors or respirators

PLAY IT SAFE with Job Safety Equipment for home, shop and industry

(6) Paint Spray Respirator*. Band. ORDER INFO: Not for use with ammonia.
9 HT 18573—Wt. 1 lb. 2 oz. . . \$14.99

Price for 3 or more items . . . \$13.49

Extra filter-cartridges for (6). Two.
9 HT 18574—Wt. 8 oz. . . Pkg. \$5.99

(7) Org. Vapor Respirator*. Rubber. ORDER INFO: Not a gas mask.
9 HT 18711—Wt. 1 lb. . . Each \$14.99

Price for 3 or more items . . . Each \$13.49

Extra cartridge for (7) only.
9 HT 18763—Wt. 7 oz. . . \$3.69

(8) Dust Mask. Foam-rubber washable, replaceable face piece. Headband. ORDERING INFORMATION:
9 HT 18521—Wt. 4 oz. . . Ea. \$2.59

Price for 3 or more items . . . Ea. 2.33

Replaceable Filters for (8) above. Five.
9 HT 18522—Wt. 4 oz. . . Pkg. \$1.99

(9) Dust and Mist Respirator*. For most dusts incl. pollen, grain, wood. ORDERING INFORMATION:
9 HT 1852—Wt. 10 oz. . . Ea. \$8.99

Price for 3 or more items . . . Ea. 8.09

Extra filters for (9 HT 1852). Pkg. of 5.
9 HT 18525—Wt. 3 oz. . . Pkg. \$2.49

*Approved by National Institute of Occupational Safety and Health

(10) Dust Respirator. Rubber face piece, headband. Washable filter. ORDERING INFORMATION:
9 HT 1872—Wt. 5 oz. . . Ea. \$6.99

Price for 3 or more items . . . Ea. 6.29

(11) Industrial Impact Goggles†. Hardened impact-resistant safety-glass lenses help prevent the possibility of eye injury. Aluminum side shields. Adj. bridge, headband. ORDERING INFORMATION:
9 HT 1860—Wt. 7 oz. . . Ea. \$4.99

Price for 3 or more items . . . Ea. 4.49

As above but fits over glasses.
9 HT 18615—Wt. 9 oz. . . Ea. \$5.99

Price for 3 or more items . . . Ea. 5.39

(12) Protective Spectacles†. Hardened impact-resistant glass lenses reduce possibility of eye injury. Plastic frame, mesh side shields. ORDERING INFORMATION:
9 HT 1855—Wt. 5 oz. . . Ea. \$6.99

Price for 3 or more items . . . Ea. 6.29

As above but without side shields.
9 HT 1854—Wt. 5 oz. . . Ea. \$6.99

Price for 3 or more items . . . Ea. 6.29

(13) Flexible Mask Impact Goggles†. Polycarbonate plastic lenses, body which reduce the possibility of a flying object causing eye injury. Perforated side shields for ventilation. Elastic strap adjust; fit over glasses. ORDERING INFORMATION:
9 HT 1859—Wt. 7 oz. . . Ea. \$1.99

Price for 3 or more items . . . Ea. 1.79

Dust, Chemical Goggles†. As above but sides have indirect vents. ORDERING INFORMATION:
9 HT 18593—Wt. 6 oz. . . Ea. \$2.99

Price for 3 or more items . . . Ea. 2.69

Extra lens for (9 HT 1859, 9 HT 18593). ORDERING INFORMATION:
9 HT 18591—Wt. 3 oz. . . \$1.19

(14) CRAFTSMAN Face Shield. Polycarbonate window 8x11 1/2 inches. Head gear adjusts to head size. ORDERING INFORMATION:
9HT18613—Wt. 1 lb. 1 oz. Ea. \$6.99

Price for 3 or more items . . . Ea. 6.29

Replacement window for (14).
9 HT 18614—Shpg. wt. 5 oz. . \$2.99

†Meets American National Standards Institute stds.

(15 and 16) Hearing Protectors. Helps protect against harmful effects of noise. Foam ear cushions follow contour of head for secure noise seal, comfortable fit. Plastic cups. Vinyl-covered metal headband; adjusts to fit over most headgear . . . (9 HT 1863) can also be worn behind head, over head, under chin. USES, ORDERING INFORMATION:

(15) For moderate noise levels . . . up to 110 decibels.
9 HT 1869—Shipping weight 13 ounces . . . \$8.99

(16) For high noise levels . . . over 110 decibels.
9 HT 1863—Shipping weight 1 pound . . . \$9.99

(17) Ear Plugs. Molded soft plastic shaped to comfortably fit outer ear canal. They're featherweight, yet still give you a noise-tight seal. Use at noise levels under 110 decibels. Includes plastic carrying box, chain. Medium size. ORDER INFO: Keep clean to avoid infection. Wt. 3 oz.
9 HT 18695 . . . Pr. 79c



COMBPK DAGJEL Sears 75

Sears Electrical Testers and Analyzers

You don't have to guess about correct wiring... our test equipment will help you spot dozens of the most common wiring errors and problems and tell you when they have been corrected



These testers let you take readings without shutting down the equipment being tested. Take readings from insulated wire. Snap transformer jaws around one conductor and read out measurements.

(1 thru 3) Volt-Ammeters

Hand-held testers let you read AC volts or amperes

(1) Volt-Ohm-Ammeter. Easy-to-read digital scale captures and holds motor starting surge current. Reads low resistance accurately.
TESTS: Use to identify line, neutral, ground at AC receptacle terminals. Check fuses, proper grounding of electrical systems, electrical systems with unloaded or incremental start capabilities and phase imbalance. Digital readout from 0.1 to 999 volts, amperes or ohms.
CASE: Plastic. PVC test leads. Carrying pouch with strap.
SIZE: Measures 7x4x9 inches high. 5-foot long test leads.
ORDERING INFORMATION: See line cord energizer accessory (4) below.
34 HT 5198—Shipping weight 3 pounds\$159.95

(2) Volt-Ammeter. Meter swivels for easy reading in awkward positions.
TESTS: Meter adjusts to read from 30 to 150 amperes and from 150 to 600 volts. Scales are color-coded: red for volts and black for amperes. Snap jaws around one conductor to take measurements.
CASE: Jaws and upper section of meter swivel through 5 separate positions... a full 180°. PVC test leads and carrying pouch with belt loop.
SIZE: Measures 2½x6 inches high. 30-inch test leads.
ORDERING INFORMATION: See line cord energizer accessory (4) below.
34 HT 5195—Shipping weight 1 pound 4 ounces\$47.95

(3) MINIPROBE™ Volt-Ammeter. Compact size... fits in shirt pocket.
TESTS: Reads from 0-110 amps and from 0-250 volts. Color-coded scales.
CASE, SIZE: Black plastic. Measures 2½x4½ inches high.
ORDERING INFORMATION: See line cord energizer accessory (4) below.
34 HT 5188—Shipping weight 8 ounces\$29.95

(4) Line Cord Energizer. Multiplies sensitivity of volt-ammeters above by 10 times. Splits double conductor line cord for direct readings under load conditions without actually cutting the conductor. Allows voltage readings at the outlet with equipment in use and without disconnecting it from line.
CASE, SIZE: Black plastic. Plug in. Measures 2½x4½ inches high.
ORDERING INFORMATION:
34 HT 5197—Shipping weight 6 ounces\$8.95

(8 and 9) Voltage and Continuity Testers

(8) Voltage Tester. Uses solenoid indicator with calibrated scale plus a neon test lamp. Independent circuitry for each provides back-up safety system.
TESTS: Checks for 110-550-v. AC and 110-600-volt DC at 25 to 60 Hz. Identifies AC or DC; checks circuit continuity; determines DC polarity; finds blown fuses, grounding and leakage.
CASE, SIZE: ABS plastic. 28-inch test leads. 5¼ inches long. 5¼-inch test probe.
ORDERING INFORMATION:
34 HT 5193—Shipping weight 14 ounces\$13.95

(9) Continuity Tester. Fits in your pocket.
TESTS: Checks continuity and low-resistance shorts. Uses two "AA" batteries, not included.
CASE, SIZE: Chrome-plated metal. 5½ inches long. 54-inch test lead with alligator clip.
ORDERING INFO: Not for use on live circuits.
34 HT 5190—Shipping weight 3 ounces\$5.95



\$25 LESS than our 1976 Power Tool Book
(5) FET Volt-Ohm Milliammeter
\$99.95

(6) Volt-Ohm Milliammeter with temperature ranges
\$74.95

(7) Pocket-size Volt-Ohm Milliammeter
\$27.95

(5 thru 7) Volt-Ohm Milliammeters

Reads in AC or DC, performs accurate tests of important electrical functions

(5) FET Volt-Ohm Milliammeter. This transistorized field effect multimeter is ideal for use in transistorized or very high resistance circuits where it effectively isolates the circuit under test from the meter and gives more accurate readings. Three color scale with center scale zero capability.
TESTS: See chart below. DC input resistance of 12 megohms. Electrical and mechanical zero adjustment for optimum accuracy. Built-in battery check circuit.
CASE: Plastic. Carrying handle. Includes batteries, test leads and vinyl pouch.
SIZE: Measures 5¾x2¾x8¾ inches high. 47-inch long test leads.
ORDERING INFORMATION:
34 HT 5196—Shpg. wt. 5 lbs. 1976 Power Tool Book price \$124.95\$99.95

(6) Volt-Ohm Milliammeter with Temperature Ranges. Uses optional probe.
TESTS: See chart below. Temperature measurement capability of -40° to +1200°F with optional temperature probe sold below. Pushbutton temperature calibration.
CASE: Plastic. Includes batteries, test leads and vinyl pouch.
SIZE: Measures 3¾x1¾x5¾ inches high. 40-inch test leads.
ORDERING INFORMATION:
34 HT 5189—Shipping weight 3 pounds\$74.95
34 HT 5168—Temperature Probe. Shpg. wt. 4 oz.19.95

(7) Pocket-size Volt-Ohm Milliammeter. Tests basic electrical functions.
TESTS: See chart below. Check controls, relays, small motors, appliances.
CASE: Plastic. Includes battery, test leads and vinyl pouch.
SIZE: Measures 3¼x1¼x4¾ inches high. 40-inch test leads.
ORDERING INFORMATION:
34 HT 5194—Shipping weight 1 pound\$27.95

Item	AC volts	DC volts	DC milliamps	Ohms	Decibels
(5)	12 to 1200	.3 to 1200	.06 to 600	1K to 1000M	-20 to +57
(6)	6 to 1200	.6 to 1200	.03 to 600	5K to 50M	-10 to +63
(7)	10 to 1000	2.5 to 1000	.05 to 250	4K to 40K	-20 to +62

NOTE: Accuracy is $\pm 3\%$ of full scale DC and $\pm 4\%$ of full scale AC.


(10) Plug-in Analyzer

For grounded outlets

Just plug in and match pattern of lights to coded keys to confirm correct wiring or to identify trouble.
TESTS: For 3-wire electrical outlet (test 2-wire outlet by using adapter, not included). Determines open ground; open hot; open neutral; hot and ground reversed; hot and neutral reversed. Also indicates correct wiring. Coded key pattern is on both sides.
CASE, SIZE: Plastic. Measures 1½x2½ inches long.
ORDER INFO: Shpg. wt. 2 oz.
34 HT 6088\$3.39



(11 thru 13) Plug-in Electric Power Outlet Strips

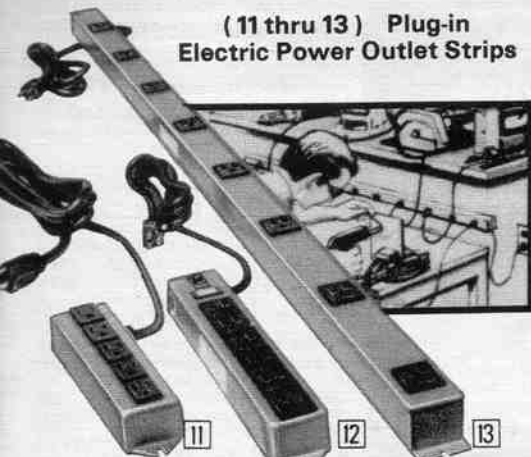

5 outlets \$15.95
6 outlets \$21.95
8 outlets \$29.95

Just plug into any other 110-120-volt AC outlet.
CONSTRUCTION: Blue enameled steel. Circuit breaker. Heavy-duty 14-gauge, 3-wire, 6-ft. cord. Mount onto wall. Strip is completely wired and assembled.
ELECTRICAL INFORMATION: UL listed 110-120-volt AC. Rated capacity 15 amps.

SIZES. ORDERING INFORMATION:

Grounded Outlets	Mounting Centers	Strip Length	Catalog Number	Shipping weight	Price
(11) 5	5 3/4 in.	8 in.	34 HT 5010	1 lb. 11 oz.	\$15.95
(12) 6	10 3/4 in.	12 in.	34 HT 5011	2 lbs. 4 oz.	\$21.95
(13) 8	14 3/4 in.	48 in.	34 HT 5012C	6 lbs.	\$29.95

(14) 10-outlet Power Strip

Ready to wire into outlet box

CONSTRUCTION: Blue enameled steel. All 10 outlets are grounded. Snap-in components. 1/2-inch knockouts at both ends. Wired with 14-gauge wire. Mount and wire into outlet box and snap on top cover.

SIZE: 6 feet long, 7-inch mounting centers.
ELECTRICAL INFORMATION: UL listed 110-120-volt AC. Rated capacity 15 amps.

ORDERING INFORMATION:

34 HT 5017C—Shipping weight 7 pounds ... \$22.95



Ground Fault Circuit Interrupters

Help guard against dangerous current leakage

(15 and 16) Small current leakages may not trip a 15 or 20-amp fuse or circuit breaker and might provide dangerous shocks. These ground fault circuit interrupters are designed to cut off current leakages as low as 5/1000 ampere (5 milliamperes). Trouble is sensed, and in as little as 1/40 of a second the current is cut off. National Electrical Code recommends this protection on outdoor circuits.

ELEC. INFO: UL listed 110-120-v. AC. 15-amp cap.

(15) **Indoor Wall Outlet-type.** Provides ground fault protection at any outlet or a group of 15-amp outlets. CONSTRUCTION: Metal and plastic. Solid state circuitry. Test circuit for testing and resetting.

INSTALLATION: Replaces wall receptacle. . . fits into conventional outlet boxes with min. depth of 1 1/4 in.
ORDERING INFORMATION:
34 HT 5314—Shipping weight 7 ounces ... \$32.95

(16) **Portable Plug-in-type.** Use indoors or out or where there is a danger of leakages. Can be used in 2 or 3-wire outlet. Grounded prong can be retracted.
CONSTRUCTION: Beige plastic case. Red light indicates circuit is disconnected. Side-by-side receptacles.
ORDERING INFORMATION:
34 HT 5316—Shipping weight 1 pound ... \$49.50

Electrical Repair Kits

With terminals and connectors to handle most electrical chores



150-pc. Kit

\$19.79

with tool



24-pc. Kit

\$9.79

with tool



Kits with tool

20

(19) Electrical Repair Kits

560-pc. without tool \$44.99

300-pc. without tool \$29.99

Do it yourself and get professional results.
CONSTRUCTION: Heavy-duty, all-welded steel box with compartments. Assorted insulated terminals and conductors (see chart below). Coded lid sheet. 9 1/4 inch compartment for tool (not included).

ORDERING INFORMATION:

34 HT 6086—560-pc. Wt. 5 lbs. 10 oz. \$44.99

34 HT 6085—300-pc. Wt. 3 lbs. 4 oz. 29.99

(20) Kit with Tool

Same as above, but with all purpose crimper/stripper/wire and bolt cutter. Steel with insulated plastic handle grips. 7 1/2 inches long.

ORDERING INFORMATION:

34 HT 6087—560-pc. Wt. 6 lbs. 3 oz. \$49.99

34 HT 6086—300-pc. Wt. 3 lbs. 8 oz. 34.99

(17) 150-piece Electrical Repair Kit

Includes all-purpose 7 1/2-in. steel tool. Plastic storage box. 150 terminals and connectors.

Terminal Description	Quantity	Wire Size	Stud Size
Closed-end splice	7	18-10 Ga.	
Spade	15	16-14 Ga.	10
Spade	4	12-10 Ga.	10
Spade flag	15	16-14 Ga.	6
Spade-end flange	15	22-16 Ga.	6
Ring	15	22-16 Ga.	10
Ring	15	16-14 Ga.	10
Ring	15	16-14 Ga.	6
Ring	4	12-10 Ga.	10
Faston Receptacle	12	16-14 Ga.	
Butt Connector	15	22-16 Ga.	
Butt Connector	12	16-14 Ga.	
Butt Connector	6	12-10 Ga.	

ORDERING INFORMATION:

Shipping weight 2 pounds 2 ounces.

34HT6080 \$19.79

(18) 24-pc. Standard Repair Kit

Includes all-purpose 7 1/2-in. steel tool. Plastic case with 24 terminals and connectors. Case can be mounted on workbench.

Terminal Description	Quantity	Wire Size	Stud Size
Butt Connector	3	22-16 Ga.	
Butt Connector	3	16-14 Ga.	
Ring	1	22-16 Ga.	10
Ring	2	22-16 Ga.	5-6
Ring	2	16-14 Ga.	10
Ring	1	16-14 Ga.	6
Ring	2	12-10 Ga.	10
Spade	2	22-16 Ga.	10
Spade	2	16-14 Ga.	10
Spade	2	12-10 Ga.	10
Closed-end splice	2	18-10 Ga.	
Closed-end splice	2	12-10 Ga.	

ORDERING INFORMATION:

Shipping weight 11 ounces.


34 HT 6084 \$9.79

Refill Terminals and Connectors

(21 thru 25) These terminals and connectors provide reliable wire connection quickly and easily. Just insert wire into terminal barrel and use crimping tool.

SPECIFICATIONS. ORDERING INFO: See chart below.

Terminal Description	Wire Size	Stud Size	Quantity	Catalog Number	Wt. oz.	Price
(21) Spade	22-16 Ga.	8-10	62	34 HT 7510	2	\$3.99
Spade	22-16 Ga.	4-6	62	34 HT 7512	2	3.99
Spade	16-14 Ga.	8-10	62	34 HT 7511	7	3.99
Spade	16-14 Ga.	4-6	62	34 HT 7513	2	3.99
(22) Ring	22-18 Ga.	8-10	62	34 HT 7508	1	3.99
Ring	22-18 Ga.	4-6	62	34 HT 7508	2	3.99
Ring	16-14 Ga.	8-10	62	34 HT 7507	2	3.99
Ring	16-14 Ga.	4-6	62	34 HT 7509	2	3.99
(23) Butt	22-16 Ga.		48	34 HT 7500	5	3.99
Butt	16-14 Ga.		48	34 HT 7501	2	3.99
Butt	12-10 Ga.		31	34 HT 7502	3	3.99
(24) Faston	16-14 Ga.		38	34 HT 7503	2	3.99
(25) Closed-end splice	22-14 Ga.		74	34 HT 7504	2	3.99
	18-10 Ga.		74	34 HT 7505	2	3.99



Sears Has a Credit Plan to Suit Most Every Need
See Big Book or ask for details

New at Sears... Heat Gun makes it easier to insulate, waterproof and repair tools by heat-shrinking plastics

It also softens, molds, bends, melts, thaws, forms, dries and fuses



Slip-on deflector helps give uniform heating on shrinkables and increases performance up to 25%.




Gun may be hand-held or the operator may place it on the work bench... it stands firmly on either side, on top, as shown here, or on back as shown at right.



Change heat range by changing color-coded nozzles... takes only seconds. Gold-colored nozzle for use with most shrinkables (incl.). Other 2 nozzles sold sep. below.

Compact unit is easy to transport from job to job, lets you work in cramped areas. No-ryl** high-impact housing is virtually indestructible.

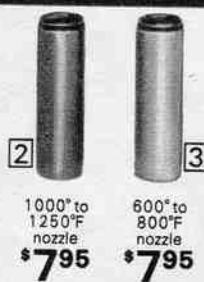

2
1000° to 1250°F nozzle
\$7.95

3
600° to 800°F nozzle
\$7.95



Package of shrink tubes
\$5.99
Thinwall

(1) Electric Heat Gun

Standard heat range \$44.95
nozzle included

Heat Gun combines high heat intensity with low air volume to shrink heat shrinkable plastics.

CONSTR.: Noryl** high-impact plastic housing with pistol-shaped handle grip for positive control. 3-position thumb switch, hot, cool or off. Gun operates on either side, on top or on back. Slip-on deflector gives uniform heating. Comes with nozzle for standard applications (800°-1000°F temp. range).

MOTOR: Shaded-pole, brushless type motor operates at 3300 rpm. Low air volume for less heat build-up in the work area. Current consumption is 4.5 amps, maximum. Vertical impeller eliminates dust, dirt, moisture, etc., from going through the motor. Pilot-light signals when unit is running.

SIZE: 8 3/4 in. long, 7 in. high.

ELECTRICAL INFO: UL listed. 120-v., 60-Hz, 475 watts, 7-ft. cord.

ORDER INFO: Wt. 2 lbs. 10 oz.
34 HT 5135 \$44.95

(2 and 3) Nozzles

CONSTRUCTION: Double wall metal construction. Mica heating element. Remove one setscrew to change nozzle.

TYPES, ORDERING INFO:

(2) High heat nozzle for Teflon* applications (red). 1000°-1250°F temperature range. 525 watts.

34 HT 5136—Wt. 4 oz. \$7.95

(3) Low heat nozzle for Mylar* polyester film applications (green). 600°-800°F temp. range. 325 watts.

34 HT 5138—Wt. 4 oz. \$7.95

(4) Shrinking Tubes

CONSTR.: Polyolefin plastic. Oper. temp: -65° to +130°F. 6 in. long.

TYPES, ORDERING INFO:

Thickwall Tubes: Shrinking ratio is 3:1. Waterproof. Colors: Red and black. 9-piece assortment.

34 HT 5133—Wt. 7 oz. \$11.99

Thinwall Tubes: Shrinking ratio is 2:1. Color: Red, black and clear. 18-piece assortment.

34 HT 5134—Wt. 2 oz. \$5.99

*Reg. DuPont TM

**Reg. G.E. TM for thermoplastic

(5 thru 9) Electricians' Tools

(5) Electricians' Stripper

Cleanly strips solid wire from 10 to 18-gauge. CONSTR.: Steel. Insulated handle grips. 6 in.

ORDERING INFORMATION:
34 HT 6071—Shpg. wt. 5 oz. \$3.99

(6) Automatic Stripper. Strips wire from 8 to 22-gauge. Reduces wire damage.

CONSTR.: Steel. Insulated grips. 7 in. long.

ORDERING INFORMATION:
34 HT 6072—Shpg. wt. 14 oz. \$8.99

(7) Electrical Repair Tool

Cuts and strips wire from 10 to 22-gauge. Crimps insulated terminals and connectors.

CONSTR.: Steel. Insulated grips. 7 1/2 in. long.

ORDERING INFORMATION:
34 HT 6096—Shpg. wt. 8 oz. \$4.79

(8) Multi-Crimp Tool

Solid leverage for easy cutting; crimps bare and insulated terminals on 22 to 10 AWG wire.

CONSTR.: Steel. Insulated grips. 9 in. long.

ORDERING INFORMATION:
34 HT 6089—Shpg. wt. 1 lb. \$9.99

(9) 3-Pc. Electronics Wire Stripper Kit

Electronic Wire Stripper. Strips cleanly 16-26 gauge stranded wire. Cuts wire, forms loops.

CONSTR.: Steel. Plastic handle grips. 6 in.


Coaxial Cable Stripper. Adjustable blades can be set for any depth to give you fast end or window strips. Strips 1/8" O.D. to 1/4" O.D.

CONSTRUCTION: Plastic. 6 inches long.

TV Lead-in Wire Stripper. For both standard parallel 300 OHM or foam type TV lead-in wire.

CONSTRUCTION: Steel. 6 inches long.

ORDERING INFORMATION:
34 HT 6078—Shpg. wt. 10 oz. \$14.99

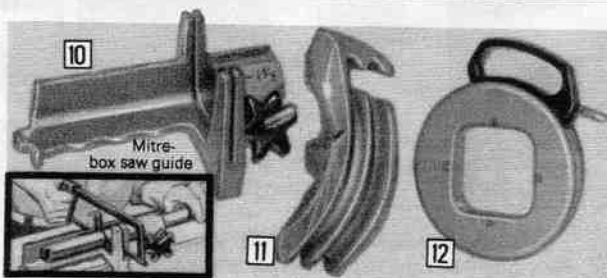

(10 thru 12) Tools for handling conduit

(10) Portable or Bench-mount Conduit Vise

For clean cut-offs of conduit, hose, dowling, etc. Helps to cut conduit, metal hose; copper, plastic or thinwall tubing; moldings, rubber hose and dowling. Will handle from 1/2-inch to 2-inch outside diameter. Use with 24 or 32 tooth hacksaw blades.

CONSTRUCTION: Cast iron and steel. Mitre-box saw guide. Holes for bench mounting. Large, free-spinning thumb-nut clamp with extra-hard threads. Swing-away clamp to hold conduit. Contoured grip.

SIZE: 3x3 1/2 x 8 inches long.

ORDERING INFORMATION:
Shipping weight 2 lbs. 4 oz.
34 HT 5007 \$10.95

(11) Bender for 1/2 and 3/4 inch thinwall Conduit

CONSTR.: Steel. Built-in degree scale makes it easy to bend conduit to desired curve. Extended foot increases leverage. Steel handle not incl., order below.

ORDERING INFORMATION:

34 HT 5005—Wt. 5 lbs. \$11.95

38-inch Steel Handle

34 HT 5006C—Wt. 4 lbs. \$4.99

(12) Fish Tape Reel. For pulling wire through conduit.

CONSTRUCTION: Lightweight 8 1/2-in. diam. reel of high-impact plastic. Large grips with grained surface for non-slip handling. Built-in winder. Incl. 40 ft. of tape.

ORDER INFO: Wt. 1 lb. 8 oz.

34 HT 5139 \$8.95

Reel with 100 feet of tape

34 HT 5140—Wt. 4 lbs. \$17.95

Specialty Worklights



For jobs needing close visual scrutiny

For jobs needing maximum light, little heat

(1) Fluorescent Worklight \$29⁹⁵

CONSTRUCTION: 15-w. fluorescent bulb offers 3 times the brightness of 15-w. incandescent bulbs. Shock-resistant, virtually unbreakable plastic shield protects fluorescent tube, guards against shattered glass. Handle, end caps made of oil-resistant yellow rubber. Yellow, 18/3 SJT cord with molded plug cap. On-off switch in handle. Two flexible hooks on hand lamp slide up and down for positioning.

ELECTRICAL INFORMATION: 15 watts, 25-ft. cord. UL listed for 110-120 volts 60-Hz. AC.

ORDERING INFORMATION: Shipping weight 4 pounds.

34 HT 5920 \$29.95

(2) Adjustable-arm Fluorescent Lamp with 3-power lens \$59⁹⁵

CONSTRUCTION: Viewing area of 4 3/4 in. with 3-power magnification ... ideal for component assembly, close detail work or hobbies. Three-diopter, 13-in. focal length lens is precision-ground and polished for clear viewing, low distortion. 22-w. circline bulb (included) spreads bright light, yet stays cool so you can get close to work. 45 in. long. Double-tension arm adjusts for accurate positioning. Attaches to table or bench up to 2 1/4 in. thick with "C" clamp. Gray baked enamel finish metal.

ELECTRICAL INFORMATION: 22 watts, 7-foot cord. UL listed for 110-120 volts 60-Hz. AC.

ORDERING INFORMATION: Shipping weight 8 pounds.

34 HT 5922 \$59.95

(3 thru 5) Trouble Lights

(3) Fluorescent Light with Reel
CONST. 15-w. fluorescent bulb. Tough plastic casing. Handle with end caps of oil-resistant vinyl, on-off switch. Yellow 18/3 SVT cord, molded plug cap. 2 flexible hooks slide up and down tube.
ELEC. INFO: 15-w., 20-ft. cord. UL listed. 110-120-v. 60-Hz. AC.
ORDERING INFORMATION: 34 HT 5921—Wt. 8 lbs. \$39.95

(4) Incandescent Light with Reel
CONSTRUCTION: Enameled metal reel, plastic bulb guard and reflector. Self-locking reel with thermoplastic covered cord. On-off switch.
ELECTRICAL INFO: UL listed. 110-120-v. 60-Hz. AC. 20-ft. cord, 2-wire, 6 amp. rated. 35-ft. cord, 3-wire, 7 amp. rated. Use up to 75-w. bulb, not included.
LENGTHS, ORDERING INFORMATION: 20-foot cord. Shpg. wt. 5 lbs. 2 oz. 34 HT 5889 \$10.39
 35-foot cord. Shpg. wt. 11 pounds. 34 HT 5894 \$20.95

(5) Incandescent Light with Grounded Outlet
CONSTRUCTION: Plastic handle, bulb guard and reflector. Orange vinyl-covered cord is heavy-duty, 3-wire, 16 gauge. On-off switch in handle.
ELECTRICAL INFO: UL listed. 110-120-v. 60-Hz. AC. 15-ft. cord. Use up to 75-w. bulb, not included.
ORDERING INFORMATION: 34 HT 5918—Wt. 1 lb. \$6.49



CRAFTSMAN Rechargeable Battery

- Delivers virtually full power for at least 200 charges... 900 hours of use
- Equivalent to 100 of our regular 6-volt batteries—over \$199 worth—yet you pay only \$18.99 for the kit



AC Charger DC Charger

Extra Battery
\$13⁹⁹

(6) Battery Kit: Includes AC and DC chargers
\$18⁹⁹

(6) Battery with Recharger Kit. Incl. rechargeable 6-v. lantern battery, 2 chargers. Lab tests prove this battery maintains almost full-rated output up to 4 1/2 hrs. continuous use. Recharges up to 200 times.

SIZE: 2 1/2 x 2 1/2 x 3 3/4 in. high. Fits standard 6-volt battery-powered equipment.

CHARGERS: AC charger charges battery from 110-120-v. AC outlet. DC charger charges battery from car cigarette lighter. Recharges overnight.

ORDER INFO: See Warranty note below.
34 HT 4647—Shpg. wt. 2 lbs. 4 oz. \$18.99

Extra Battery. Cannot be used alone.
34 HT 4646—Shpg. wt. 1 lb. 8 oz. 13.99

(7) Battery-powered Fluorescent Lantern \$23⁹⁹

Shines 5 times brighter than incandescent bulb of the same wattage. Use batteries or adapters for home or auto use.

CONST.: Orange polystyrene case. On/off switch, high/low beam settings. Carrying strap. **BATTERY, ADAPTERS:** Use 2 rechargeable 6-v. batteries (above) or 2 heavy-duty 6-v. batteries. Adapters operate on 110-120-v. AC house current or DC current from car cigarette lighter.

BULB INCLUDED: 6-watt fluorescent.
ORDER INFO: See Warranty note below.
34 HT 4844—Shpg. wt. 4 lbs. \$23.99

(8) Explorer II Lantern \$16⁹⁹

Provides up to 4 hours light per charge. **CONSTR.:** Orange high-impact plastic base. On/off switch. Adjustable light beam focus. Rain-tight. Luminous rim on 4 1/2-in. diameter lens.

SIZE: Measures 8x5x5 inches high.
BULB INCL.: Standard flashlight bulb.
ELEC. INFO: Built-in recharger. 110-120-v. AC.
ORDER INFO: See Warranty note below.
34 HT 4817—Shpg. wt. 2 lbs. 2 oz. \$16.99
Replacement Bulb. For lantern sold above.
34 HT 4602—Shpg. wt. 2 oz. 49c

Write for Sears specific written Warranty, see p. 82.



(9 and 10) Portable Cord Reels

(9) Portable Reel with Cord Guide
CONSTRUCTION: Reel of heavy-gauge steel, aluminum alloy with baked-on orange enamel finish. Holds up to 100 ft. of 14/3 "ST" electrical cord (not incl.). Chrome-plated tubular steel stand. Mount on most walls or near convenient power source. 27 1/2 in. high.
ORDERING INFORMATION: 34 HT 5864C—Shpg. wt. 13 lbs. \$21.99

(10) Portable Reel. Use freestanding in the yard or hang on the wall.
CONSTRUCTION: Steel reel holds up to 100 ft. of 14/3 "ST" electrical cord (not incl.). Wide-stance steel stand. Wooden handle.
ORDERING INFORMATION: 34 HT 5865—Shpg. wt. 7 lbs. \$9.49

(11 and 12) Extension Cords

Use extra heavy-duty 14-gauge cord both indoors and outdoors for larger powered tools. Use 16-gauge indoors for small powered tools.
CONSTRUCTION: Insulated, water-repellent thermoplastic jacket.
ELEC. INFO: UL listed. 110-120-v. 60-Hz. AC. GAUGE, LENGTH, CAPACITIES. **ORDER INFO:**

Length feet	Amp capacity	Catalog Number	Wt. lbs.	oz.	Price
(11) 14-gauge 3-wire "ST" Outdoor Cords					
25	15	34 HT 5834	4	7	\$7.99
50	15	34 HT 5835	10	0	13.99
100	15	34 HT 5836C	16	0	23.99
(12) 16-gauge 3-wire "SPT-2" Indoor Cords					
15	13	34 HT 5803	0	15	\$3.59
25	13	34 HT 5804	1	9	4.39
50	13	34 HT 5805	3	5	6.99



CRAFTSMAN® Surveying Levels give you fast, accurate readings...

FULL ONE YEAR WARRANTY ON CRAFTSMAN® TRANSIT AND SIGHTING LEVELS: If, within one year from the date of purchase, any of these Craftsman Transit or Sighting Levels fails because of a defect in material or workmanship, Sears will repair it, free of charge. Warranty service is available by simply returning the instrument to the nearest Sears store throughout the United States. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

SERVICE INFORMATION: If your Craftsman Transit or Sighting Level needs adjustment or repairs after warranty expires, simply contact the nearest Sears store or catalog sales store for fast factory service at reasonable cost.

Our most popular Tilting Transit Level **\$194⁹⁵** level alone

Plate vial gives sensitivity of 12-14 minutes per 2-millimeter division for more accurate readings



Levels on this page are available with tripods

RANGE: 18-power telescope for work under 100 feet, 26-mm fixed lens focuses from 4½ feet to infinity.

PLATE, SCOPE VIALS: Positive vial mountings. Constant control is maintained even when telescope is in transit position. Plate vial has sensitivity of 12 to 14 minutes per 2-mm division. Horizontal circle divided to single degrees in quadrants. Double disc-type vernier reads to 15 minutes (¼°). Vertical arc reads to single degrees with index. Dust protected micrometer clamp and tangent screws. Scope vial has sensitivity of 7 to 8 minutes per 2-mm division.

TELESCOPE CONSTRUCTION: Brass, aluminum, plastic and glass. Achromatic lens. Rack-and-pinion focusing. Precision-machined fine motion parts. Dust-protected eyepiece has cross hairs in fixed focus. Built-in sunshade. Dust-protected leveling screws with easy-to-handle knobs. Shifting center for setting over a point. Strong, push-pull leveling lock converts instrument from a transit to a level.

ACCESSORIES: Includes fitted carrying case, plumb bob, instructions. Order jeweled compass sold separately below.

ORDERING INFORMATION: See warranty and service information above.


Level alone
9 HT 46202C—Shipping weight 7 pounds \$194.95

Level above with stiff-leg tripod (9 HT 46081C) described below. Save \$13.99. Separate prices total \$233.94.

9 HT 46214C2—Shipping weight 19 pounds \$219.95

Level above with extension-leg tripod (9 HT 46082C) described below. Save \$28.99. Separate prices total \$248.94.

9 HT 46241C2—Shipping weight 21 pounds \$219.95

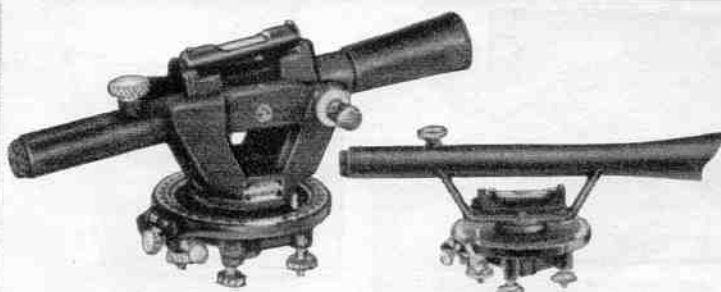

Tilting Transit Level **\$164⁹⁵** level alone

RANGE: 16-power, for work under 100 ft. Focuses 4½ ft. to infinity.

SCOPE VIALS: Horizontal circle, disc-type vernier read to 15 minutes (¼°). Dust-protected micrometer clamp, tangent screws. Scope vial has sensitivity of 7 to 8 minutes per 2-mm division.

TELESCOPE CONSTRUCTION: Brass, aluminum, plastic, glass. Achromatic lens. Rack-and-pinion focusing. Precision-machined fine motion parts. Cross hairs in fixed focus. Dust-protected leveling screws. Shifting center for setting over a point. Converts from transit to level.

ACCESSORIES: Incl. fitted carrying case, plumb bob, instructions.

ORDERING INFO: See warranty and service information above.

Level alone, Shpg. wt. 7 lbs.

9 HT 46161C \$164.95

Level with stiff-leg tripod (9 HT 46081C) below. Separate prices total \$203.94.

Shipping weight 19 pounds.

9 HT 46242C2 \$199.95

Level with extension-leg tripod (9 HT 46082C) below. Separate prices total \$218.94.

Shipping weight 21 pounds.

9 HT 46243C2 \$214.95

Non-tilting Level **\$99⁹⁵** level alone

RANGE: 18-power, for work under 100 ft. Focuses 4½ ft. to infinity.

SCOPE VIALS: Horizontal circle, disc-type vernier read to 15 minutes (¼°). Dust-protected micrometer clamp, tangent screw for fine pointing. Scope vial has sensitivity of 7 to 8 min. per 2-mm division.

TELESCOPE CONSTRUCTION: Brass, aluminum, plastic, glass. Achromatic lens. Rack-and-pinion focusing. Precision-machined fine motion parts. Cross hairs in fixed focus. Built-in sunshade helps reduce glare. Dust-protected leveling screws. Shifting center for setting over a point.

ACCESSORIES: Incl. fitted carrying case, plumb bob, instructions.

ORDERING INFO: See warranty and service information above.

Level alone, Shpg. wt. 7 lbs.

9 HT 46105C \$99.95

Level with stiff-leg tripod (9 HT 46081C) below. Separate prices total \$138.94.

Shipping weight 19 pounds.

9 HT 46215C2 \$134.95

Level with extension-leg tripod (9 HT 46082C) below. Save \$7.95. Separate prices total \$153.94.

Shipping weight 21 pounds.

9 HT 46221C2 \$145.99

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details

(A) thru (G) CRAFTSMAN® Surveying Tools and Accessories

(A) Tripods with stiff-legs. For relatively flat terrain. Steel legs, hardware. Yellow and white markings for safety on the job. With leg-binding strap portability. Legs do not extend.

SIZES, ORDERING INFORMATION:

60 inches long, for levels above.

9 HT 46081C—Shpg. wt. 12 lbs. \$38.99

58 inches long, for levels on page 81.

9 HT 46084C—Shpg. wt. 14 lbs. \$68.99

(B) Tripods with extension legs. For hilly, uneven terrain. Legs adjust independently of each other. Steel legs, hardware. Wood center stick. Yellow and white markings for safety on the job. Includes handy leg-binding strap.

SIZES, ORDERING INFORMATION:

Extends 35 to 58 inches; for levels above.

9 HT 46082C—Shpg. wt. 14 lbs. \$53.99

Extends 37 to 59 inches; for levels on page 81.

9 HT 46085C—Shpg. wt. 14 lbs. \$95.95

(C) Sliding section Leveling Builders' Rod. Maple. Clip-on target. Marked in feet, inches. Vernier readings ¼ to ¼ inch.

SIZES, ORDERING INFORMATION:

9 HT 46121C—10-foot rod. Wt. 7 lbs. \$43.99

9 HT 46122C—15-foot rod. Wt. 9 lbs. \$53.99

Engineers' Rod. Not shown . . . similar to (C). Marked in feet, ¼ foot and ⅛ foot. Vernier readings to ¼ foot.

SIZES, ORDERING INFORMATION:

9 HT 46112C—10-foot rod. Wt. 7 lbs. \$43.99

9 HT 46113C—15-foot rod. Wt. 9 lbs. \$53.99

(D) Locke-type Hand Level. For rough survey. Steel. Adjustable focus . . . vial magnifies 4 times. Vinyl pouch, belt loop. 6½ inches long.

ORDERING INFORMATION:

9 HT 4600—Shipping weight 11 oz. \$26.99

(E) Nickel-Plated Plumb Bob. Steel. Removable cap. Hexagonal shape.

SIZES, ORDERING INFORMATION:

9 HT 38401—5-oz. size. Wt. 7 oz. \$99c

9 HT 38402—8-oz. size. Wt. 10 oz. \$1.29

(F) Pocket Sight and Surface Level. For preliminary survey. Aluminum. 5 in. long. Case.


ORDERING INFORMATION:

9 HT 4624—Shipping weight 13 oz. \$10.49

(G) Jeweled Compass. Steel. 4-in. diam. Needle adjusts for dip. Variation ring in quadrants to 1°. Adjusts to plus or minus 40° declination.

ORDER INFO: For (9 HT 46202C) above only.

9 HT 4613—Shipping weight 1 lb. \$29.99

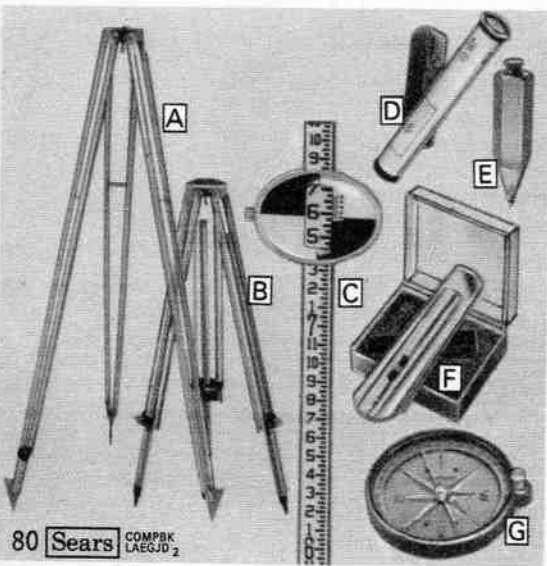

align fences, level foundations, site contours for farming and more


Here are ten reasons the levels on these two pages give you sharp, distinct, right-side-up images on job site after job site



① Achromatic lenses . . . precision ground, polished to exact curves for clarity



② Telescopes precision bored to rifle-barrel accuracy . . . dust proof fittings



③ Rack-and-pinion focusing for accurate line of sight throughout range



④ Fine motion parts are precision machined to avoid backlash, side play



⑤ Fitted carrying case protects level from dust and moisture

⑥ Circles and verniers are sized to speed readings and help reduce costly errors

⑦ Graduations are permanently registered on metal in precise, easy-to-read divisions for fast readings

⑧ Dust-protected leveling screws have large knobs for firm grasping . . . even with gloves on

⑨ Level vial mountings are designed to help your instrument hold its adjustment in the field

⑩ Protective finishes are hard-baked and durable for high impact and abrasion resistance



(A) Fixed-lens transit level without optical plummet or lateral adjuster

\$299.95




(B) Fixed-lens transit level with optical plummet and lateral adjuster

\$449.95

(A and B) Contractors' Transit Levels

Choose zoom or fixed lens

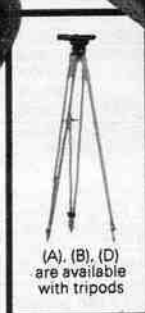

(A), (B), (D) are available with tripods

RANGE: 18 to 34 power zoom lens . . . just turn eyepiece to change focus. Ideal for shots over 125 feet or for greater accuracy at shorter distances. Focuses from 3 feet to infinity.

PLATE, SCOPE VIALS: Plate vial has sensitivity of 130 seconds per 2 mm division. Horizontal circle with double vernier reads directly to 5 minutes ($1/12^\circ$). Dust-protected micrometer clamp, tangent screws. Precision-ground scope vial has sensitivity of 110 seconds per 2 mm division.

TELESCOPE CONSTRUCTION: Die-cast aluminum. Achromatic lens. Rack-and-pinion focusing. Focusing-type eyepiece. Dust-protected leveling screws. Strong leveling lock for stability.

ACCESSORIES: Includes fitted carrying case, sun shade and instruction manual.

(A) Levels without Built-in Optical Plummet or Lateral Adjuster. Use traditional plumb bob and string (both included) to sight in and center level. Shifting center for setting over a point.

ORDER INFO: See warranty, service info., p. 80.

Zoom-lens level alone

9 HT 46194C—Shipping weight 14 lbs. . . \$329.95

Zoom-lens level with stiff-leg tripod (9 HT 46084C) described on facing page. Save \$8.99. Separate prices total \$398.94.

9 HT 46245C2—Shipping wt. 28 lbs. . . \$389.95

Fixed-lens level alone. As described above but with 22 power fixed lens.

9 HT 4619C—Shipping weight 14 lbs. . . \$299.95

(B) Levels with Built-in Optical Plummet and Lateral Adjuster. Sight thru telescope to center level . . . gives faster, more accurate centering than any other level on these 2 pages. **ORDER INFO:** Warranty, service info., p. 80.

Zoom-lens level alone

9 HT 46024C—Shpg. wt. 17 lbs. . . \$489.95

Zoom-lens level with stiff-leg tripod (9 HT 46084C) described on facing page. Save \$8.99. Separate prices total \$558.94.

9 HT 46244C2—Shpg. wt. 31 lbs. . . \$549.95

Fixed-lens level alone. As described above but with 22 power fixed lens.

9 HT 4602C—Shpg. wt. 17 lbs. . . \$449.95

(C) Engineers' Transit with built-in compass and tripod . . . designed for professional use on commercial job sites

RANGE: 22 power . . . ideal for shots over 125 feet. Focuses from 3 feet to infinity.

COMPASS: Built into plate. Jeweled bearing and hardened steel pivot. $3\frac{1}{16}$ -inch needle adjusts for declination. Graduated in single degrees.

PLATE, SCOPE VIALS: Two plate vials have sensitivity of 120 sec. per 2 mm division. $5\frac{1}{2}$ -in. horizontal and 5-in. vertical circles, both with double verniers, read directly to 1 minute. Scope vial has sensitivity of 60 sec. per 2 mm division. Dust-protected micrometer-type tangent screws with smooth, helical spring counteraction.

TELESCOPE CONSTRUCTION: Aircraft-type aluminum alloy, precision bored. $10\frac{1}{2}$ -in. long. Bronze axis journals. Achromatic lens. Rack-and-pinion focusing. Focusing-type eyepiece with cross hairs and stadia lines in fixed focus at 1:100 ratio. Dust-protected leveling screws.

TRIPOD: Extends from 37 to 59 in. Hardwood painted yellow, white for safety. Cast-aluminum shoes, steel points. Clamps, protective cap and handy leg-binding strap incl.

ACCESSORIES: Incl. fitted carrying case, sun shade, 12-oz. plumb bob and string, magnifier, instruction manual.

ORDER INFO: See warranty, service information on facing page. Allow extra time for shipment from factory in Boston, Mass. Pay shipping and handling charges from your Distribution Center. No C.O.D. orders.

F9 HT 46106—Shipping weight 31 pounds . . . \$669.00



\$669.00
complete

Tripod included

(D) Contractors' Dumpy Level

Zoom lens brings even distant images into sharp, clear focus



\$269.95
level alone

RANGE: 20 to 36 power zoom lens . . . just turn eyepiece to change power. Ideal for shots over 125 feet or for greater accuracy at shorter distances. Focuses from $4\frac{1}{2}$ feet to infinity.

SCOPE VIAL: Horizontal circle with double vernier reads directly to 5 minutes ($1/12^\circ$). Precision-ground scope vial has sensitivity of 110 sec. per 2 mm division. Dust-protected micrometer clamp and tangent screws.

TELESCOPE CONSTRUCTION: Die-cast aluminum, precision-bored for accuracy. Achromatic lens. Rack-and-pinion focusing. Focusing-type eyepiece. Dust-protected leveling screws. Forged shifting center for setting over a point.

ACCESSORIES: Includes fitted carrying case, sun shade, plumb bob and string, instruction manual.

ORDERING INFORMATION: See warranty and service information on facing page.

Zoom-lens level alone

9 HT 46034C—Shipping weight 14 pounds . . \$269.95

Zoom-lens level with stiff-leg tripod (9 HT 46084C) described on facing page. Save \$8.99. Separate prices total \$338.94.

9 HT 46216C2—Shipping weight 28 pounds . \$329.95

Fixed-lens Level alone. As described above but with 25 power fixed lens.

9 HT 4603C—Shipping weight 14 pounds . . \$229.95

Fixed-lens level with stiff-leg tripod (9 HT 46084C) described on facing page. Save \$8.99. Separate prices total \$298.94.

Shipping weight 28 pounds.

9 HT 46217C2 . . . \$289.95

There are four easy ways to order from this Catalog

1

Shop By Phone—You'll be pleased at the ease and convenience of ordering from Sears Catalog by telephone. So call today—it's the easiest way to shop. Phone your Easy Payment and Sears Revolving Charge Account orders, too.

Have your order delivered directly to your home or pick it up at your nearest Sears Catalog Selling Unit.

2

Shop at Home by Mail—No matter where you live, Sears is always prepared to offer prompt and efficient service. Just list all the items on a Sears order blank or any plain piece of paper. Print plainly your full name and mailing address. Be sure to include all catalog numbers, descriptions of wanted items and any special information requested.

3

Catalog Sales Office or Sears Authorized Catalog Sales Merchant—It's so easy to order through your nearest Sears Catalog Selling Unit. A copy of all current Sears catalogs are available in each office for your reference. In addition, a complete supply of FREE Specialized Catalogs are also available for the asking.

4

Retail Store Catalog Sales Department—Friendly sales people are always willing to help you when you shop in person or by phone. Each Sears Retail Store has a Catalog Sales Department where trained sales people will help you make a selection and write your order. Many units have samples of merchandise on display.

CREDIT TERMS—See Sears Big Book or any Sears Retail Store or Catalog Selling Unit for information on Sears Credit Plans

HELPFUL INFORMATION ABOUT YOUR SEARS CATALOG ORDER

REGARDING OUR CATALOG PRICES

Following the policy in effect since our founding in 1886, prices quoted in Sears catalogs do not include (unless stated otherwise) charges for handling and shipping of goods from our Merchandise Distribution Center to a Sears catalog selling unit for pick-up, or for delivery to your home. The shipping and handling charges may differ depending on method of shipping. Information on shipping and handling charges for shipping by parcel post or truck can be obtained from the yellow customer information pages of our Big Book. Details on charges for handling and shipping to a Sears catalog selling unit for pick-up can be obtained from the unit, either at the counter or over the phone.

Although it is our intention to maintain prices printed in this Catalog until our next such Catalog is issued, special rare circumstances beyond our control may make it necessary to reduce or to increase the prices listed before a new catalog quoting the price change can be issued. For example, should the Federal, State or Local Government increase or impose additional taxes after this book goes to press, we reserve the right to add such taxes to the prices shown. Also, should unusual market conditions result in sharp fluctuations in prices after this catalog goes to press, we reserve the right to revise our prices accordingly; in such a case, we will notify you of the price change prior to processing your order.

On the other hand, if any of the existing taxes are reduced while this catalog is in effect, we shall adjust our prices accordingly. Further, when any item you order is being offered at a lower price in another Sears catalog current with the book you are using, your order will be filled at the lower price.

Prices in this catalog apply only to orders placed by mail, telephone, telegraph or placed in person at a Sears Catalog Sales Office, Authorized Catalog Sales Merchant or at a Catalog Sales Department in a Retail Store, Retail Catalog and Appliance Store or in a Sears Affiliated Store. Catalog merchandise prices and assortments may vary from those in our Retail Stores.

COPIES OF WARRANTY STATEMENTS

A copy of the warranty statement for any product in this catalog covered by a specific written warranty may be obtained free by writing to:

Customer Relations Department
Sears, Roebuck and Co.
Sears Tower BSC 41-3
Chicago, IL 60684

IMPORTANT TAX NOTICE

We are required by law to collect tax on sales at rate shown

*Alabama 4%	Kentucky 5%	*North Carolina 3%
*Arizona 4%	*Louisiana 3%	North Dakota 3%
Arkansas 3%	Maine 5%	*Ohio 4%
California 6%	Maryland 4%	Oklahoma 2%
If your Rapid-Transit	Massachusetts	Pennsylvania 6%
District has a tax . . . 6½%	(Omit tax on food and	Rhode Island 6%
Colorado 3%	articles of clothing	South Carolina 4%
Connecticut 7%	to \$175) 5%	*South Dakota 4%
Distr. of Columbia . . . 5%	Michigan 4%	*Tennessee 4½%
Florida 4%	*Minnesota 4%	Texas (4% State,
*Georgia 3%	Mississippi 5%	1% City) 5%
Hawaii 4%	Missouri 3%	*Utah 4½%
Idaho 3%	Except Kansas City	Vermont 3%
Illinois (4% State,	customers 4%	Virginia 4%
1% City) 5%	*Nebraska 3%	Washington 5.4%
Indiana 4%	*Nevada 3%	West Virginia 3%
Iowa 3%	New Jersey 5%	Wisconsin 4%
Kansas 3%	New Mexico 4%	Wyoming 3%
	*New York 4%	

*If your city, county or parish has a tax, include the additional tax required

SHIPPING INFORMATION

"N", "N2", "NH" suffix (such as 9-1234N) means that this item, if shipped directly to your home, is sent by motor carrier. (See non-Sears truck information pages in our Big Book.) If you prefer, pickup your order at a Sears Catalog Selling Unit. . . ask about pickup charges. Home delivery through a Sears unit may also be available, please inquire.

Parts of your order may be shipped from points other than your distribution center and may therefore arrive separately at different times.

C.O.D. ORDERS

C.O.D. orders are accepted only for merchandise sent from a Catalog Merchandise Distribution Center to a Sears Unit. You may then pick up your order or arrange with your Sears unit for redelivery to your home (if available).

If you request that your order be sent directly to you via Parcel Post or Freight, you must include a money order, check or use your Sears Credit Account.

Nor do we ship C.O.D. orders for merchandise cut, engraved, printed or made to order, for merchandise shipped direct from factory or shipped to foreign countries or to anyone other than the person sending the order.

PARCEL POST INFORMATION

Packages weighing up to 70 pounds and measuring not more than 100 inches in length and girth can be sent by parcel post in all parcel post zones, except catalog numbers followed by "L".

"L" items (as 30-2186L) cannot be mailed from a first class post office to a first class post office for city delivery in any parcel post zone. (This does not apply to rural route addresses.) "L" items weighing less than 15 lbs. and measuring over 84 in. up to 100 inches in length and girth combined are chargeable with a minimum rate equal to that for a 15 lb. item.

Your Catalog Merchandise Distribution Center is served by a first class post office. Your Postmaster or carrier can tell you if you are served by a first class post office. Catalog numbers ending with "N", "N2", etc. are unavailable.

SEARS SHIPPING AND HANDLING CHARGES FOR ORDERS SHIPPED BY PARCEL POST

SHIPPING WEIGHT	APPROXIMATE DISTANCE FROM CATALOG MERCHANDISE DISTRIBUTION CENTER							
	Local Zone	Zones 1 and 2	Zone 3	Zone 4	Zone 5	Zone 6	Zone 7	Zone 8
		Not over 150 Miles	300 Miles	600 Miles	900 Miles	1200 Miles	1500 Miles	Over 1800 Miles
1 oz. to 8 oz.	\$.28	\$.36	\$.36	\$.38	\$.43	\$.46	\$.51	\$.56
9 oz. to 15 oz.	.68	.74	.74	.74	.81	.90	.99	1.08
1 lb. to 2 lbs.	.75	.85	.90	1.10	1.20	1.30	1.40	1.50
2 lbs. 1 oz. to 3 lbs.	.80	1.00	1.05	1.20	1.30	1.40	1.60	1.75
3 lbs. 1 oz. to 5 lbs.	.90	1.15	1.25	1.35	1.50	1.75	1.95	2.05
5 lbs. 1 oz. to 10 lbs.	1.10	1.40	1.50	1.75	2.10	2.45	2.85	3.00
10 lbs. 1 oz. to 15 lbs.	1.30	1.80	2.00	2.25	2.85	3.30	3.75	4.20
15 lbs. 1 oz. to 25 lbs.	1.60	2.20	2.50	2.90	3.65	4.50	5.25	6.20
25 lbs. 1 oz. to 40 lbs.	2.10	3.05	3.60	4.25	5.30	6.45	8.10	9.40
40 lbs. 1 oz. to 55 lbs.	2.70	4.15	4.80	5.80	7.25	9.75	11.95	13.90
55 lbs. 1 oz. to 70 lbs.	3.30	5.20	6.40	7.60	9.45	12.05	14.70	17.20

SEARS CATALOG MERCHANDISE DISTRIBUTION CENTERS

ATLANTA, GA 30395	JACKSONVILLE, FL 32297
BOSTON, MA 02215	KANSAS CITY, MO 64127
CHICAGO, IL 60607	LOS ANGELES, CA 90051
COLUMBUS, OH 43228	MEMPHIS, TN 38140
DALLAS, TX 75295	MINNEAPOLIS, MN 55407
GREENSBORO, NC 27480	PHILADELPHIA, PA 19132
	SEATTLE, WA 98184

SEARS GUARANTEE . . Satisfaction Guaranteed or Your Money Back

Whatever you buy at Sears, you have the right to use it for a reasonable time before you determine it is satisfactory and decide to keep it. If you decide it is not satisfactory, return it to us at our expense. We will do whatever is necessary to correct the cause of your dissatisfaction. If we can't satisfactorily provide a remedy, or if you request a refund, we will refund your full purchase price including appropriate delivery and finance charges and applicable taxes.

SEARS PLEDGE OF FAIRNESS

If, after you have decided to keep your purchase, it doesn't give you the service or performance you reasonably expect of it and there isn't a specific warranty on the item that will satisfactorily correct the problem, please let us know. We want to make an adjustment that you will consider fair.

GENERAL INDEX


Abrasives	17, 21, 117, 119, 124, 125
Adhesives	95, 117
Air Compressors, Accessories	104, 105
Air Pumps	105
Air Tools	106-113
Alarms, Fire and Gas	84
Analizers, Electrical	76
Aprons, Carpenters' and Handyman	103
Arc Welders, Accessories	36, 37
Augers, Drain	90
Auto Tools	44-46
Axes, Accessories	94
Band Saws	6, 7, 11, 34, 35
Bars	45
Bits:	
Auger	102, 118
Cutter	16
Drill	102, 118, 119
Mortising	14, 131
Router	132, 133
Screwdriver	99
Shaper	13, 16, 23
Blades, Saw:	
Band	11, 34, 35
Circular	24, 25
Coping	93
Dado	23
Electric hand	24, 25
Hack	89
Jig	18
Radial	24, 25
Reciprocating	130
Sabre	126
Table	23-25
Body, Fender Tools	44, 45
Bolt Cutters	101
Books	4, 32, 103, 133
Braces, Accessories	102
Brake Tools	44
Bricklayers' Tools	103
Buffing Wheels	30, 119
Cabinets:	
Mechanists'	70
Mechanics'	68, 69
Workshop	72, 73
Calipers	86
Carts	43, 68, 70
Carving Tools	18, 19
Cases, Carrying	120, 121
Casters	22, 98
Cement Tools	103
Chains	48
Chain Saws and Accessories	114, 115
Chalk, Chalk Lines	103
Chests, Tool	68-71
Chisels	45, 93
Chucks	32, 33
Circuit Interrupters	77
Circular Saws	128, 129
Clamps	36, 85, 95
Compressors, Air	104, 105
Conveyor	48
Cord Reels	79
Cord Sets	79
Cranes	48
Cutter Heads, Molding	13, 16, 23
Dado Blades, Accessories	21, 23
Dial Indicators, Accessories	87
Dies, Accessories	88, 89
Dividers	86
Dollies	43
Dovetailing Attachments	14, 132
Drain, augers	90
Drill Accessories	118-120
Drill Presses, Accessories	6, 7, 121
Drills:	
Electric	122, 123
Hand	102
Dry-Wall Tools	103
Dust Collectors	21, 40, 41, 131, 134
Electrical Outlets	77
Electric Testers	76
Electricians' Tools	77, 78, 100, 101
Engraving Tools	18, 19
Extension Cords	79
Eye Protectors	75
Face Protectors	75, 132
Face Shields	36, 75, 132
Files, Accessories	89
Fire Detectors	84
Fire Extinguishers	74
Flaring Tools	90, 91
Fluorescent Lighting	79
Gauges	44, 85-87, 97
Gear Pullers	44
Generator Engines	37, 116
Glue Guns, Glues	95, 117
Goggles	75
Grinders, Accessories	28-30
Hack Saws	89
Hammers, Accessories	45, 94
Hand Trucks	43
Hatchets, Accessories	94

Hearing Protectors	75
Hex Keys	53
Hobby Tools	17-19
Hoists	47
Impact Tools, Accessories	110-113
Jack Screws	48
Jigsaws, Blades	18
Jointer-Planers, Accessories	7, 16, 17
Knives	102
Lanterns	79
Lathes, Turning:	
Metal, Accessories	32, 33
Wood, Accessories	12, 17, 32, 33
Leg Sets	22
Levels:	
Building and Surveying	80, 81
Carpenters'	97
Locks	31
Lubricants	101
Machinists' Tools	86
Magnets	89
Magnifiers	87
Mandrels	119
Mapp Gas Kits and Cylinders	38, 91
Masks	75
Masonry Tools	103
Material Handling Equipment:	
Cranes	48
Flat Truck	43
Hand Truck	43
Hydraulic Lift	48
Steel Conveyors	48
Measuring Tape	97
Mechanics' Tool Chests and Cabinets, Accessories	68, 69
Mechanics' Tools	44-47, 49, 58-67
Meters, Electrical	76
Metric Tools:	
Measuring Tapes, Meter Stick	97
Sockets	54-56
Taps and Dies	88, 89
Tool Sets	57-67
Torque Wrenches	52
Wrenches	49
Micrometers	85
Milling, Accessories	33
Miter Boxes, Accessories	92
Molding Cutter Heads	13, 16, 23
Motors, Accessories	26, 27
Neil Gun	98
Nail Sets	93
Nippers	100-101
Nut Drivers, Sets	49
Oil, Oilers	100-101
Paint Sprayers, Accessories	108-109
Pallet Trucks	43
Personal Safety Equipment:	
Pick-up Tools	89
Pipe-Threading Tools	91
Planer-Molders	16
Planers, Accessories	130
Planes	102
Plasterers' Tools	103
Pliers, Accessories	100-101
Plumbers' Tools, Accessories	90, 91
Pneumatic Tools	110-113
Polishers, Accessories	30, 119, 124, 125
Pouches, Tools	103
Power Outlet Strips	77
Power Plants	118
Power Washer	116
Precision Tools	85-87
Propane Torches, Accessories	91
Protractors	87
Pruning Saw, Blades	93
Pullers	44, 45, 48
Pulleys	26, 27
Pumps, Air	105
Punches	45
Radial Saws	7-10, 34
Ratchet Wrenches, Accessories	52, 53
Reamers	89
Reciprocating Saws	130
Rechargeable Batteries	79
Reels, Cord	79
Respirators	75
Rethreading Tools	88
Rivet Tools, Accessories	98
Rotary Grinders	19
Routers, Accessories	131-136
Rules	87
Sabre Saws	126-127
Safety Equipment	75
Sandblasters	106
Sander-Polishers	119

Sanders:	
Accessories	6, 7, 13
Air Drive	113
Belt	124
Disc	125
Grinder	17
Pad	124, 125
Saws, Accessories:	
Back	92
Band	6, 7, 11, 34, 35
Chain	114, 115
Circular	128, 129
Coping	93
Crosscut	93
Hack	89
Hand, Electric	26-30
Hand, Manual	92, 93
Jig	18
Keyhole	93
Miter	92
Radial	7-10, 20, 21, 23, 34
Reciprocating	130
Sabre, Scroll	127
Table	1, 3-7, 17, 20, 21, 23
Sawhorses	93
Sawhorse Sets, Brackets	93
Scrapers, Accessories	102, 103
Screwdrivers	99
Scribers	86
Sewer Rods	90
Shapers, Accessories	13
Sharpeners	
Drill bit	119
Saw	29
Sharpening Stones	93
Shop Vacuums, Accessories	40, 41
Snips	101
Socket Wrench Sets	57, 59
Sockets, Sets	54-56
Soldering Guns, Irons, Accessories	95
Splitting Wedge	94
Sprayers, Paint	108, 109
Squares	97
Stamping Sets	93
Stands, Tool	22
Staplers, Accessories	98
Stools	72
Storage Bins	
Shelves, Drawers	72, 73
Strippers, Wire	77, 78
Stud Driver, Accessories	93
Surforming Tools	102
Surveying Instruments	80, 81
Switches, etc.	26, 27, 32
Table Saws	1, 3-7, 17
Taps, Dies, Accessories	88, 89
Terminal Kits	77
Thread Cutters	88, 89
Tool Boxes	71
Tool Cases	120, 121
Tool Cabinet Cart	68
Tool Holders	103
Mechanics' Tool Sets:	49, 58-67
Torches	
Accessories	91
Tripods	80
Trouble Lights	79
Trowels	103
Tubing Tools	90, 91
Twine	103
Vacuum Cleaners, Accessories	40, 41
Vises	96
Wedges	94
Welders, Arc, Accessories	36, 37
Welders Oxy-Acetylene, Mapp	
Accessories	38, 39
Welders' Personal Protectors	36
Whetstone	93
Winches	48
Wiring Supplies	77, 78
Wire Brushes	103
Wire Strippers	77, 78
Wood Turning Lathe, Access.	12, 17
Woodworker's Bench	74
Work Benches	72-75
Work Centers	74, 75
Work Lights	22, 72, 79
Wrecking Bars	93
Wrenches, Accessories:	
Adjustable	49
Air	111, 112
Combination	50, 51
Cross Rim	45
Box-End	50, 51
Distributor	45
Hex Keys	53
Ignition	49
Metric	49, 50, 51
Open End	50
Pipe	90, 91
Ratchet	52, 53
Setcrew	53
Socket	57
Spark Plug	55
Tap	89
Torque	52

Sears "Early One" Fire Alarms can detect combustion before you can even see or smell the first signs of smoke

Plus, each alarm is tested for proper functioning before it leaves the factory

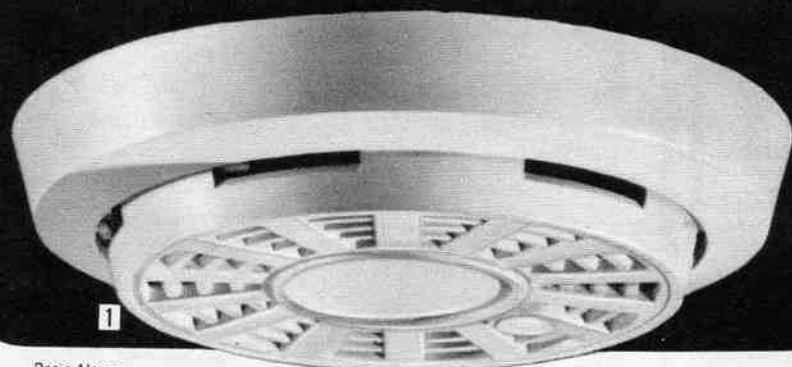


Alarm detects combustion in these 3 stages:

Initial Stage:	Smoke Stage:	Flame Stage:
Particles of combustion not visible in this stage	Products of combustion are visible—such as smoke	Advanced products of combustion can be spread fast



Built-in Signal monitors operation:

Every "Early One" battery-powered Unit sounds a short alarm once every minute for 7 days or more when battery needs to be replaced

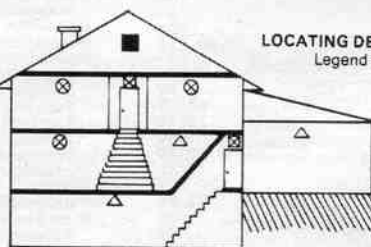

LOCATING DETECTORS IN YOUR HOME

Legend for types of detectors:

- ☒ Early One with or without thermal detector
- ⊕ Additional Early One for extra protection
- Early One with thermal detector
- △ Heat-activated Fire Detector

Early One Fire Alarms with or without thermal detector, should be located in all bedroom areas (location should allow alarm to awaken persons through doors) and anywhere particles of combustion could mass and block an exit (tops of stairways). Additional alarms may be needed in frequent smoking and electrical appliance use areas. Attics, outside furnace or utility rooms and other locations where high heat build-up could occur without the presence of particles of combustion, should be equipped with an Early One Alarm with thermal detector. **NOTE:** Placing an Early One Alarm in kitchens, garages or anywhere particles of combustion (such as cooking smoke, auto exhaust) normally exist can result in unwanted alarms. Heat-activated Fire Detectors should be used in these areas.

FULL ONE YEAR WARRANTY ON FIRE EXTINGUISHERS AND FIRE OR SMOKE ALARMS (NOT INCLUDING POWER CELLS)

For one year from the date of purchase, Sears will repair or replace these alarms or extinguishers free of charge, if defective in material or workmanship. This warranty does not apply to power cells which are expendable. To obtain warranty service, simply return these alarms or extinguishers to your nearest Sears store throughout the United States.

LIMITATION ON LIABILITY. Remedy under this warranty is limited to repair or replacement of these alarms or extinguishers as provided above. Sears will not be liable for loss or damage due directly or indirectly to occurrences which these alarms or extinguishers are designed to detect. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

(1 thru 4) Battery-powered "Early One" Alarms

These alarms can give you important time to react . . . capable of detecting particles of combustion when they are still invisible.
CONSTRUCTION: Solid-state. Polymer housing. Built-in 85-decibel alarm. UL listed (conforms to UL standard 217).
BATTERY: Includes 9-v. alkaline battery. Lasts approximately 1 year.
INSTALLATION: For residential use only. Mount with 2 screws (included). See "Locating Detectors in Your Home" at right.

(1) Basic Alarm
SIZE: 6-in. diameter, 1 3/4 inches high.
TEST PROCEDURE: Direct smoke towards unit for testing. Resets automatically when air clears.
ORDERING INFO: See Full One Year Warranty below, right.
Wt. 1 lb. 2 oz.
9 HT 57001 . . . \$24.99

(2) Alarm with test button
SIZE: 7-in. diameter, 1 3/4 inches high.
TEST PROCEDURE: No smoke needed . . . just press button, alarm horn will sound indicating horn and circuit are operating properly. Can also be smoke tested. Resets automatically.
ORDERING INFORMATION: See Full One Year Warranty below at right.
Wt. 1 lb. 2 oz.
With white housing.
9 HT 57002 . . . \$29.99
Walnut-tone, wood-look burl center.
9 HT 57003 . . . \$29.99

(3) Alarm with test button plus 135°F thermal detector
Warns when temperature rises above 135°F and also warns when particles of combustion are present to trigger alarm.
SIZE: 7-in. diam, 1 3/4 inches high.
TEST PROCEDURE: Same as alarm (2).
ORDER INFO: See Warranty below, right. Wt. 1 lb. 2 oz.
With white housing.
9 HT 57004 . . . \$34.99
Walnut-tone, wood-look burl center.
9 HT 57005 . . . \$34.99

Replacement 9-volt Alkaline Battery. For any 9-volt battery-powered "Early One" fire alarm. Lasts approximately one year.
ORDERING INFO: Shpg. wt. 3 oz.
9 HT 57017 . . . \$1.69

Remote Alarm with transmitter (4) can warn of fire up to 100 feet away when used with Receiver (5)

Place alarm in remote location such as basement or workshop and receiver near bedside . . . when combustion triggers transmitter, receiver sounds warning



(4) Alarm with test button and built-in transmitter
SIZE: 7-inch diameter, 1 3/4 inches high.
TEST PROCEDURE: No smoke needed . . . just press button, alarm horn will sound indicating horn and circuit are operating properly. Resets automatically when air clears.
ORDERING INFORMATION: See Warranty at right. Use with receiver (5) at right.
9 HT 57035—Shpg. wt. 1 lb. 7 oz. . . . \$49.95

(5) Receiver. Accepts signal from one or more transmitters up to 100 feet away.
CONSTR.: Polymer housing, simulated wood-grained finish. 3 3/4 x 8 x 2 in. high.
INSTALLATION: Mounts on wall (hardware included) or sits on bedside table.
ELECTRICAL INFO: Uses 115-v., 60-Hz., AC 5-foot, 2-wire cord. UL listed.
ORDER INFO: See Warranty at right.
9 HT 57018—Shpg. wt 1 lb. 15 oz. . . . \$29.99

NEVER PRICED LOWER at Sears . . . DuPont Freon® powered Heat-activated Alarm

Warns of fires in garages, furnace rooms, kitchens **\$1847**

Sounds alarm when temperature rises above 135°F. Not activated by smoke.

CONSTRUCTION: Aluminum housing. 85-decibel alarm powered by 2 cylinders of non-flammable DuPont Freon® propellant. Sounds one warning for at least 4 minutes . . . factory refillable. Measures 7x6x4 in. deep. UL listed.
INSTALLATION INFORMATION: Mount on wall not more than 12 inches below ceiling. Mounting bracket tilts unit for checking. Hardware included. See "Locating Detectors in Your Home" above, right.

ORDERING INFORMATION: For room-size areas only. See Full One Year Warranty above, right.
9 HT 5703—Shipping weight 2 lbs. 2 oz. \$18.47


AC-powered Photo-electric Fire Detector \$1999

Reacts quickly to smoke . . . with test button

Photocell light sensor continually monitors air circulating through detector . . . warns at first trace of smoke.

CONSTRUCTION: Polymer housing. 85-db. alarm.
SIZE: Measures 7x7x1 3/4 inches high.
TEST PROCEDURE: No smoke needed . . . just press button, horn will sound indicating horn and circuitry are operating properly. Resets automatically when air clears.
LAMP: Includes 2 lamps (one for unit, one spare). Signal automatically sounds if lamp fails.
INSTALLATION: Mount on wall not more than 12 inches below ceiling. Hardware included.
ELECTRICAL INFO: Uses 115-v., 60-Hz., AC. 9-foot, 2-wire cord. UL listed (conforms to UL standard 217).
ORDER INFO: See Full One Year Warranty above.
9 HT 57061—Shipping weight 2 lbs. 4 oz. \$19.99



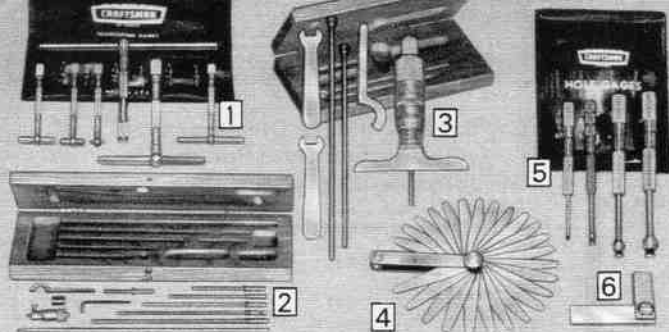

CRAFTSMAN® Specialty Gauge Sets and Squares

(1) **Telescope Gauge Sets**
CONSTRUCTION: High grade tool steel. Head ends heat-treated for toughness. Plunger telescopes, locks with knurled screw.

CAPACITIES, ORDERING INFO: See warranty, page 86.

6-gauge Set— $\frac{1}{16}$ to 6 in.

Shipping weight 14 oz.

9 HT 4027.....Set \$44.99

4-gauge Set— $\frac{1}{16}$ to 2½ in.

Shipping weight 6 oz.

9 HT 40203.....Set \$26.99

(2) **Inside Micrometer Sets**

CONST: Chrome-plated heads. Heads and mandrels ground, hardened for accuracy. With setting and extension handles; case.

CAPACITIES: See ranges below. Standard scales read to .001 in., metric to .01 mm.

RANGE, ORDERING INFO: See warranty on page 86.

Standard—1½ to 8½ in.

Shpg. wt. 1 lb. 4 oz.

9 HT 3864.....Set \$47.99

Standard—1½ to 12½ in.

Shpg. wt. 1 lb. 14 oz.

9 HT 38641.....Set \$59.99

Metric—38 to 213 mm.

Shpg. wt. 1 lb. 10 oz.

9 HT 38642.....Set \$47.99

(3) **Depth Gauge Sets**

CONST: Tool steel; screw stock extensions. Ends hardened, precision ground, lapped. Adjusting nut compensates for wear. Interchangeable rods held by knurled cap. Case, lock.

CAPACITIES, ORDERING INFO: See warranty on page 86.

Standard—0 to 3 in. by .001 in.

9 HT 3863—Wt. 1 lb. 2 oz. Set \$45.99

Standard—0 to 6 in. by .001 in.

9 HT 38632—Wt. 2 lbs. Set \$56.99

Metric—0 to 75 mm. by .01 mm.

9 HT 38623—Wt. 1 lb. 4 oz. Set \$45.99

(4) **Taper Leaf Gauge.** 26 leaves taper to ¼ inch, from .0015 to .025 in. thick. Steel.

ORDER INFO: See warranty, p. 86.

9 HT 4094—Shpg. wt. 6 oz. Set \$6.99

(5) **4-pc. Small-hole Gauge Set.** Oil hardened tool steel. Range of ⅛ to ½ inch. Plastic pouch.


ORDER INFO: See warranty, p. 86.

9 HT 4056—Wt. 5 oz. Set \$29.99

(6) **Steel Squares.** Hardened and ground. Beam and blade pinned solidly. Not scaled. From England.

ORDER INFO: See warranty, p. 86.

Catalog Number	Blade inch	Beam inch	Wt. oz.	Each
9 HT 40401	2½	1½	5	\$6.99
9 HT 40402	3½	2½	6	7.49
9 HT 40403	4	3	8	8.49
9 HT 40404	6	3½	14	9.99

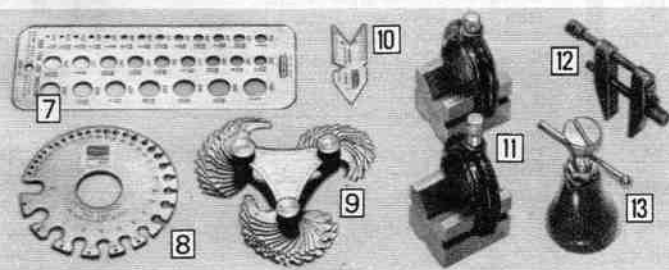

CRAFTSMAN® Gauges, Clamp Sets and Jack Screw

(7) **Drill Gauge.** Polished steel. Measures 29 fractional sizes from ⅛ to ½ inch.

ORDER INFO: Warranty, p. 86.

9 HT 4049—Wt. 5 oz. Set \$3.99

Drill and Wire Gauge (not shown). Polished, hardened steel. Sizes 1 to 60. Index for taps.

ORDER INFO: Warranty, p. 86.

9 HT 4047—Wt. 5 oz. Set \$3.99

(8) **Circular Gauge.** Steel. Measures wire, sheet, plate sizes 0 to 36. American Standard for non-ferrous metals.

ORDER INFO: Warranty, p. 86.

9 HT 4023—Wt. 6 oz. Set \$7.99

(9) **V-thread Gauge.** Knurled, hardened and rolled steel. Pitches 4 to 84. From England.

ORDER INFO: Warranty, p. 86.

9 HT 4031—Wt. 5 oz. Set \$15.99

(10) **Lathe Center Gauge**
Stainless steel. U.S. Standard 60°. Graduations at 14th, 20th, 24th, 32nd of an inch.

ORDER INFO: Warranty, p. 86.

Shipping weight 2 ounces.

9 HT 40642.....\$3.29

(11) **4-piece V-block and Clamp Set.** Hardened tool steel V-blocks are precision ground for both square and parallel accuracy. V-blocks measure 1½x1½x1¼ inches.

Clamps hold 1-inch round or irregular work material. Set includes 2 V-blocks, 2 clamps.

ORDERING INFO: See warranty on page 86. Wt. 2 lbs. 2 oz.

9 HT 4083.....Set \$19.99

(12) **Toolmaker's Clamp.** Parallel, case-hardened steel jaws 2½ inches long. Spring clip. Jaws open to 1 inch.

ORDERING INFO: Not Craftsman.

9 HT 4481—Wt. 5 oz. Set \$1.49

Toolmaker's Clamp as above but with 4-inch long jaws. Opens to 2 inches.

9 HT 4486—Wt. 12 oz. Set \$2.29

(13) **Jack Screw.** Lifts 1000 pounds. Adjusts to 1 inch. Measures 3 inches high when closed, 4 inches high fully extended.

ORDERING INFO: Not Craftsman.

Shipping weight 8 ounces.

9 HT 4088.....\$2.49

CRAFTSMAN® Micrometers

(14) Ground-thread Micrometers

CONST: Steel, cast steel with polished spindle, anvil. Ground thread. Spindle hardened to Rc 62-64, lead error held to .00005 in. Spindle lock. Black frame. Standard scales marked to .001 in., metric scales to .01 mm. Meet federal specs. for accuracy.

ACCESSORIES: Sets include case. See chart for number of checking standards.

RANGE, ORDER INFO: See warranty, p. 86.

Catalog Number	Pieces	Range	No. of Standards	Wt. lbs. oz.	Price
9HT38601	1	0-1 in.	0	9	\$25.99
9HT38602	1	1-2 in.	1	12	34.99
9HT38603	1	2-3 in.	1	14	39.99
9HT38604	1	3-4 in.	1	14	44.99
9HT38605	1	4-5 in.	1	16	49.99
9HT38606	1	5-6 in.	1	13	54.99
9HT38607	4	0-4 in.	3	4	144.99
9HT38608	6	0-6 in.	5	9	244.99
9HT38621	1	0-25 mm	0	8	25.99
9HT38622	1	25-50 mm	1	10	34.99

Rolled-thread Micrometers (not shown). As above, but with rolled thread. Spindle hardened to Rc 58-62 with lead error held to .0003 inch. Gray frame.

ACCESSORIES: Sets include case. See chart for number of checking standards.

RANGE, ORDER INFO: See warranty, p. 86.

Catalog Number	Pieces	Range	No. of Standards	Wt. lbs. oz.	Price
9HT38711	1	0-1 in.	0	8	\$19.99
9HT38712	1	1-2 in.	1	10	27.99
9HT38713	1	2-3 in.	1	12	31.99
9HT38714	1	3-4 in.	1	14	34.99
9HT38715	1	4-5 in.	1	16	39.99
9HT38716	1	5-6 in.	1	13	43.99
9HT38717	4	0-4 in.	3	4	109.95
9HT38718	6	0-6 in.	5	9	175.95
9HT38721	1	0-25 mm	0	8	19.99
9HT38722	1	25-50 mm	1	10	27.99
9HT38723	1	50-75 mm	1	12	31.99
9HT38724	1	75-100 mm	1	14	34.99
9HT38725	1	100-125 mm	1	16	39.99
9HT38726	1	125-150 mm	1	13	43.99
9HT38727	4	0-100 mm	3	4	109.95
9HT38728	6	0-150 mm	5	9	175.95

(15) **Mandrel Micrometer.** Four interchangeable mandrels let this tool do the work of 4 fixed-anvil micrometers. . . measures 0 to 4 inches by .001 inch.

CONST: Strong steel frame. Satin-chrome plated head, easy-to-read scale.

ACCESSORIES: Includes 3 checking standards, wrench and storage case.

ORDER INFO: See warranty, p. 86.

9 HT 38607—Wt. 2 lbs. 8 oz. Set \$76.99

(16) **Digit Depth Micrometer.** Digital counter for clear, accurate readings. . . measures 0 to 4 inches by .001 inch.

CONST: 2½-in. base micro-lapped for accuracy. Base, thimble satin-chrome finished. Friction thimble for constant pressure. Positive locking clamp. Conventional sleeve thimble provided to double check digital counter.

Includes 4 rods, fitted case. From Japan.

ORDER INFO: See warranty, p. 86.

9 HT 38645—Wt. 2 lbs. 2 oz. Set \$55.95

(17) **Metric/Standard Micrometer—our finest.** Reads millimeters and inches simultaneously for easy conversions.

CONST: Clearly-marked graduations on satin-chrome finished steel and cast steel. Carbide-tipped. With lock, speeder and heat insulators, fitted case. From Japan.

CAPACITY: Direct readings on digital counter to .01 mm. Standard vernier scale to .0001 in. Size 0 to 1 inch.

ORDER INFO: See warranty, p. 86.

9 HT 38666—Wt. 1 lb. 6 oz. Set \$49.99

As above, but reads in inches only

9 HT 38644—Wt. 1 lb. 3 oz. Set \$39.95

(18) **Fixed-anvil Micrometers**

CONST: Forged steel head, frame. Threads ground, polished. Carbide-tipped anvil and spindle. Graduated to .0001 inch. Decimal equivalents etched on frame. Plastic pouch.

CAPACITIES, ORDERING INFORMATION: See warranty on page 86.


9HT38662-0 to 1 inch. Wt. 9 oz. Set \$32.99

9HT38665-1 to 2 inches. Wt. 12 oz. Set \$39.99


Graduated to .001 in. (not shown). Measures 0 to 1 in. Ideal for apprentices. No case.

ORDERING INFORMATION: Not Craftsman.

9 HT 40701—Shpg. wt. 8 oz. Set \$9.99

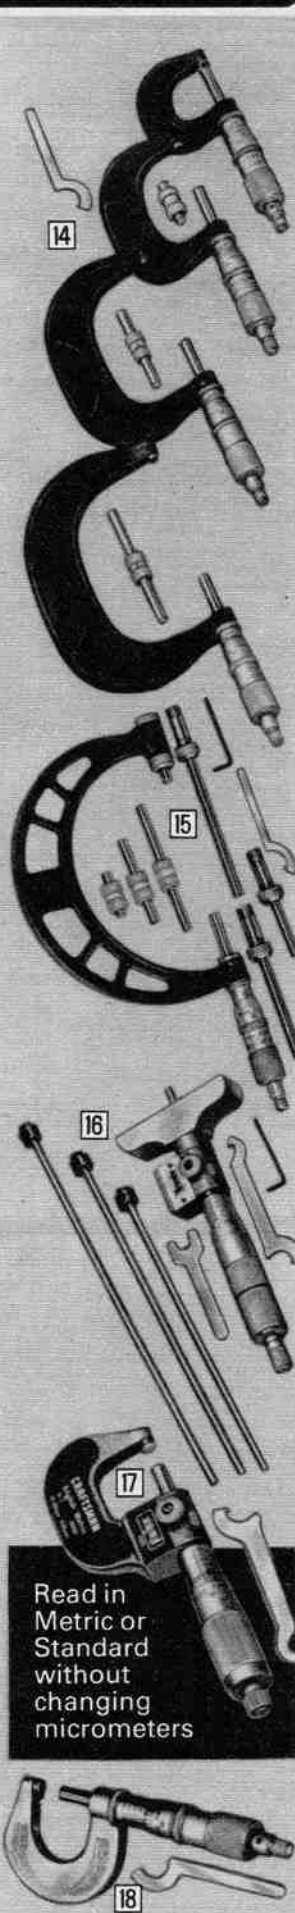

Read in Metric or Standard without changing micrometers

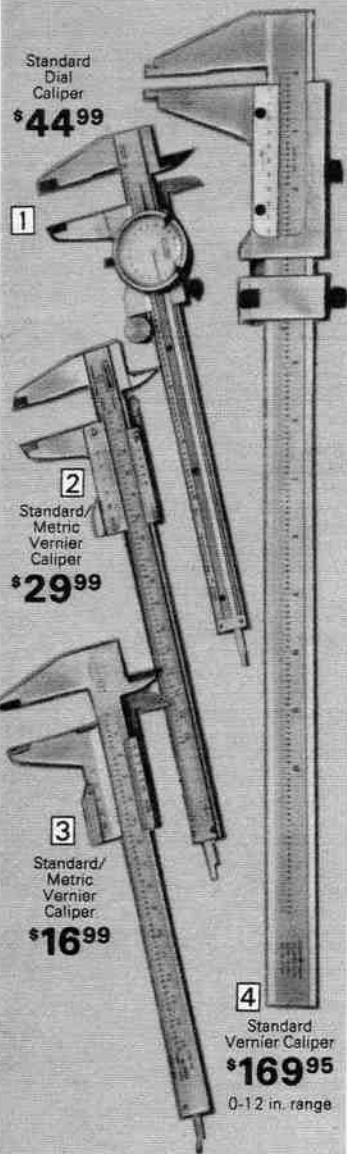

CRAFTSMAN® Calipers

(1) Standard and Metric Dial Calipers

CONSTRUCTION: Stainless steel with chrome-plated scales on beam. Scales read from inside or outside. Depth rod. Adjustable bezel. 9 1/4 inches long. With storage case. From Japan.

CAPACITIES, ORDER INFO: See warranty below.

Standard scale: 0 to 6 in. graduated to .001 in.

9 HT 40172—Shpg. wt. 1 lb. 4 oz. \$44.99

Metric scale: 0 to 150 mm graduated to .05 mm.

9 HT 38668—Shpg. wt. 1 lb. 4 oz. \$49.99

(2) Standard/Metric Vernier Caliper with 6-inch/150mm range

CONSTRUCTION: Stainless steel with chrome-plated scales on recessed beam. Depth rod. Cam lock. 8 in. long. With storage case. From Japan.

CAPACITIES: Standard and metric scales from 0 to 6 in. by .001 in. and 0 to 150 mm by .05 mm.

ORDERING INFORMATION: See warranty below.

With adjustable vernier plates

9 HT 40182—Shipping weight 11 oz. \$29.99

Without adjustable plates

9 HT 40181—Shipping weight 11 ounces \$22.99

(3) Standard/Metric Vernier Caliper with 5.3-inch/130mm range

CONST.: Stainless steel, polished scales on beam. Reads from inside or outside. Precision ground measuring faces. Depth rod. Automatic thumb lock. 8 3/8 inches long. With case. From Italy.

CAPACITIES: Standard and metric scales from 0 to 5 3/8 in. by .001 in. and 0 to 130 mm by .05 mm.

ORDERING INFORMATION: See warranty below.

9 HT 40257—Shipping weight 8 oz. \$16.99

(4) Standard and Standard/Metric Vernier Calipers

CONST.: Tool steel, dulled chrome finish. Hardened adjustable jaws ground, precision lapped. Adjustable buffer plate for uniform jaw tension. Zero adjustment. Hardened recessed beams read from inside or outside. Points on beams and slides for setting dividers. Nibs 0.3 in. wide with jaws closed. Adjusting nut helps prevent backlash. Meet or exceed Fed. Specs. GGG-c11b for accuracy.

CAP.: See chart below for range. Stand. scales graduated to .001 in., metric scales to .05 mm.

ORDERING INFO: See warranty below. Allow extra time for shipment from factory in St. James, Minn. Pay shipping and handling charges from your Distribution Center. No C.O.D. orders.

Catalog Number	Range		Length of Jaws (in.)	Wt. lbs.	Price
	Standard	Metric			
F9 HT 40231	0-12 in.	2 1/4	4	4	\$169.95
F9 HT 40232	0-24 in.	2 3/4	8	8	\$249.95
F9 HT 40233	0-12 in.	0-300 mm	2 1/4	4	\$169.95
F9 HT 40234	0-24 in.	0-600 mm	2 3/4	8	\$249.95
F9 HT 40235	0-36 in.	0-900 mm	3	13	\$499.95

Vernier, Dial and Slide Calipers

(5) Standard, Standard/Metric Vernier Calipers

CONSTRUCTION: Polished steel. Roller adjustment. Scales read from inside or outside. Depth rod. 7 1/2 inches long. Accurate to .01 inch.

CAPACITIES, ORDER INFO: Not Craftsman.

Standard scale: 0 to 5 in. by 16ths, 32nds in. Vernier readings in 128th inch.

9 HT 4022—Shipping weight 7 ounces \$4.49

Standard/Metric scale: 0 to 5 in. by 16th in., 0 to 140 mm by 1 mm. Vernier readings in 128th in., 0.1 mm.

9 HT 40222—Shipping weight 6 ounces \$4.49

(6 and 7) Standard/Metric Dial, Vernier Calipers

CONSTRUCTION: Nylon asbestos-reinforced polyamide plastic. Scales read inside or outside. Depth rod. Thumb roller. 8 3/8 in. long. From Switzerland.

(6) Dial Caliper. With zero adjustment, case.

CAPACITIES: Standard and metric scales from 0 to 5 in. by .001 in. and 0 to 130 mm by .1 mm.

ORDERING INFORMATION: Not Craftsman.

9 HT 40224—Shipping weight 8 ounces \$9.99

(7) Vernier Caliper

CAPACITIES: Standard and metric scales from 0 to 5 in. by .001 in. and 0 to 130 mm by .05mm.

ORDERING INFORMATION: Not Craftsman.


9 HT 40226—Shipping weight 6 ounces \$4.99

(8) CRAFTSMAN Standard/Metric Slide Caliper

CONSTRUCTION: Stainless steel. 4 1/2 inches long. CAPACITIES: Inside scale reads to 2 1/16 in., outside to 2 7/8 in. Marked in 32nds of an inch and 0.5 mm. Decimal equivalents on back.

ORDERING INFORMATION: See warranty at right.

9 HT 4025—Shipping weight 3 ounces \$3.99

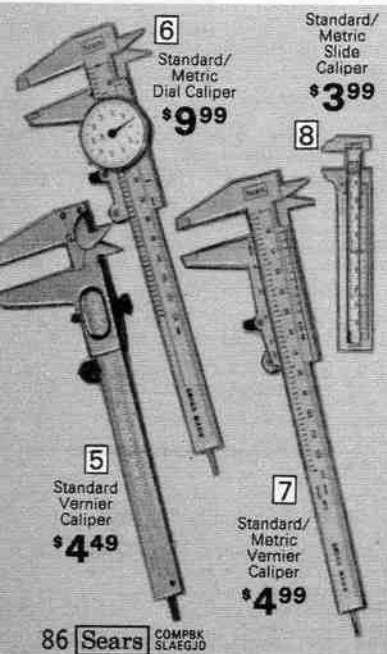

CRAFTSMAN® Calipers, Dividers, Trammel, Scribes and Punch

(9 thru 11) Flat Leg Calipers, Dividers

CONSTRUCTION: High quality tool steel legs machined to uniform length and balance. Adjustable.

TYPES, SIZES, ORDERING INFORMATION: See warranty below.

Item	Catalog No.	Size	Wt.	Price
(9) Outside Calipers	9 HT 38598	4-in.	4 oz.	\$5.49
	9 HT 38599	6-in.	6 oz.	5.99
(10) Inside Calipers	9 HT 38593	4-in.	4 oz.	5.49
	9 HT 38597	6-in.	6 oz.	5.99
(11) Dividers	9 HT 38591	4-in.	4 oz.	5.49
	9 HT 38592	6-in.	6 oz.	5.99

(12) Hermaphrodite Caliper

CONSTRUCTION: High quality tool steel. Legs machined to uniform length and balance. Adjustable tension. 6 in. long.

ORDERING INFO: See warranty below.

Shipping weight 5 ounces.

9 HT 38537 \$6.99

(13) Adjustable Trammel Points

Use to measure distances that are too great for ordinary dividers.

CONSTRUCTION: Steel. 3 inch points. With fine adjusting screw.

ORDERING INFO: See warranty below.

Shipping weight 9 ounces.

9 HT 4061 \$12.99

(14) Double Point Scriber

CONSTRUCTION: Steel. Knurled sleeve. 1 straight, 2 curved tempered points are replaceable and interchangeable. Measures 9 inches long with short point, 12 inches long with long point.

ORDERING INFO: See warranty below.

Shipping weight 4 ounces.

9 HT 4014 \$1.99

(15) Single Point Scriber

CONSTRUCTION: Aluminum body with reversible tungsten carbide steel tip. With magnetic end.

ORDERING INFO: See warranty below.

Shipping weight 3 ounces.


9 HT 4078 \$2.49

(16) Center Punch


CONSTRUCTION: Heat-treated, knurled steel body. Alloy steel point. 5 inches long overall, 1/2 inch diameter.

ORDERING INFO: See warranty below.

9 HT 40541—Shpg. wt. 5 oz. \$5.99

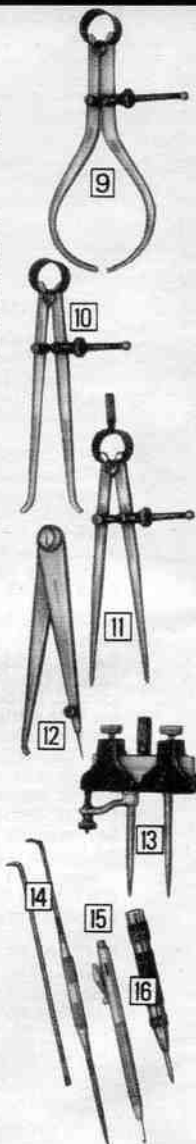

CRAFTSMAN® Machinists' Combination Square \$42.99

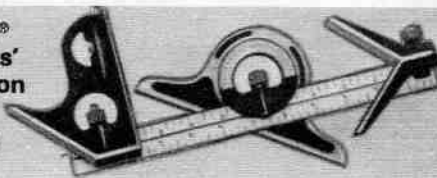

Check 45 and 90° angles. Use as depth or height gauge.

CAPACITY: 12-inch scale graduated in 8ths and 16ths inch on one side, 32nds and 64ths on other. Non-reversible bevel protractor graduated 180° left and right. Level vial in square head. Meets Fed. Specs. GGG-S-656a for accuracy.

CONSTRUCTION: Hardened ground steel scale, machine divided for accuracy. Cast-iron, precision ground protractor, square head and center head.

ORDERING INFORMATION: See warranty below.

9 HT 38694—Shipping weight 1 pound 8 ounces \$42.99

Graduated in 32nds, 64ths inch and 1 mm, 0.5 mm

9 HT 38643—Shipping weight 2 pounds 8 ounces \$42.99

Graduated in 32nds, 64ths and 50ths, 100ths inch

9 HT 38695—Shipping weight 1 pound 8 ounces \$42.99

As (9 HT 38694) but no protractor

9 HT 38693—Shipping weight 1 pound 8 ounces \$24.99

As (9 HT 38694) but no protractor or center head

9 HT 3869—6-inch scale. Shpg. wt. 13 oz. \$15.99

9 HT 38691—12-inch scale. Shpg. wt. 1 lb. 6 oz. 19.99

FULL ONE YEAR WARRANTY ON CRAFTSMAN® PRECISION TOOLS

If, within one year from the date of purchase, any Craftsman Precision Tool fails due to a defect in material or workmanship, Sears will repair it, free of charge. Warranty service is available by simply returning the Precision Tool to the nearest Sears store throughout the United States. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

(1) **100-lb. pull Magnetic Base Indicator Holder.** Holds most dial indicators; center-lug, universal or plunger back. CONSTRUCTION: Steel. 100-lb. pull magnet with on/off switch. Fine adjustment allows settings to within .0001 inch. 1 1/2 x 1 1/2 x 2 1/4 inches high, 9 inches high overall. From Japan. ORDERING INFORMATION: See warranty on facing page. 9 HT 38908—Shipping weight 4 pounds 7 ounces \$24.99



(2) **60-lb. pull Magnetic Base Indicator Holder.** CONSTRUCTION: Steel. 60-lb. pull magnet with quick-release lever. Fine adjustment screw for close tolerance settings. 3 1/2 x 2 x 2 1/2 inches high, 12 inches high overall. ORDERING INFORMATION: See warranty on facing page. 9 HT 38911—Shipping weight 1 pound 8 ounces \$14.99

(3) **50-lb. pull Magnetic Base Indicator Holder.** Holds most dial indicators with 1/4-inch holder bar. CONSTRUCTION: Steel. 50-lb. pull magnet with quick-release lever. 3 1/2 x 1 1/2 x 2 1/2 in. high, 6 in. high overall. ORDERING INFORMATION: See warranty on facing page. 9 HT 3872—Shipping weight 15 ounces \$9.99

(4) **4-piece Center Finder Set.** CONSTRUCTION: Tool steel. Interchangeable offset, needle, disc and ball points clamp into shank with ball and swivel-joint action . . . adjusts to angular or concentric position. Adjustable chuck tension. 4 1/2 in. long. With storage case. ORDERING INFORMATION: See warranty on facing page. 9 HT 4004—Shipping weight 5 ounces Set \$7.99

(5) **1/2-inch Single Edge Finder.** Hardened steel surfaces . . . centerless ground to precision tolerance. ORDERING INFORMATION: See warranty on facing page. 9 HT 38819—Shipping weight 4 ounces \$3.99

CRAFTSMAN® Indicator Holders, Center Finder Set and Edge Finder

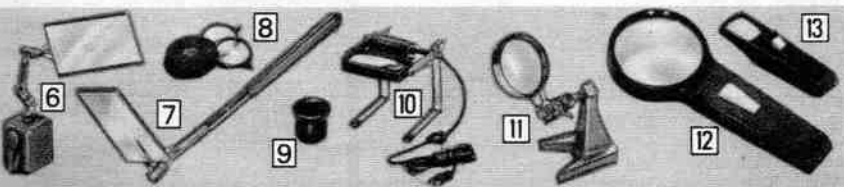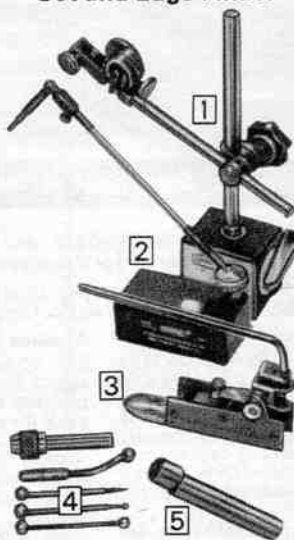

(6) **Inspection Mirror with Magnetic Base.** Magnet with quick-release lever holds 2 1/2 x 3 1/2 inch mirror. Adjustable. ORDER INFO: See warranty, facing page. 9 HT 4095—Shpg. wt. 1 lb. 1 oz. \$13.99

(7) **Inspection Mirror.** 2 1/2 x 3 1/2 in. Steel handle telescopes from 11 1/4 to 15 1/4 inches. ORDER INFO: See warranty, facing page. 9 HT 4098—Shpg. wt. 8 oz. \$2.99

(8) **Pocket Magnifier.** Two 4 power lenses, 1 and 1 1/2 inch diameter. With plastic case. ORDER INFO: See warranty, facing page. 9 HT 40813—Shpg. wt. 3 oz. \$5.69

(9) **Eye Loupe.** 1 1/2 inch, 4 power lens. ORDER INFO: See warranty, facing page. 9 HT 40879—Shpg. wt. 3 oz. \$2.49


(10) **Lighted Desk Magnifier.** Light shines thru 4x2-in., 1.25 power lens, 8-inch focal length. 5x5x5-in. folding stand. Adjustable. ELECTRICAL INFO: 115 v., 60 Hz. AC. 7 watts. Switch on 6 ft. cord. UL listed. ORDER INFO: See warranty, facing page. 9 HT 40874—Shpg. wt. 1 lb. 7 oz. \$14.99

(11) **Desk Magnifier.** Steel base with 2-inch diam., 1.7 power lens . . . adjustable. ORDER INFO: See warranty, facing page. 9 HT 40871—Shpg. wt. 14 oz. \$8.99

(12) **Battery-powered 3 1/2-in. diameter Magnifying Glass.** Pre-focused bulb throws light directly below 2 power lens. Unbreakable plastic handle, frame. 3 3/4 in. wide, 9 1/2 in. long. With 4 AA penlite batteries, 1 bulb. Slide type on/off switch. ORDERING INFO: Not Craftsman. 9 HT 40823—Shpg. wt. 11 oz. \$11.75

(13) **Battery-powered 1x1-in. Magnifying Glass.** Pre-focused bulb, 4 power lens. Unbreakable plastic handle, frame. 4 1/2 in. long. With 2 AAA batteries, 1 bulb. Press-type on/off switch on handle. ORDERING INFORMATION: Not Craftsman. 9 HT 40821—Shpg. wt. 5 oz. \$3.75

Replacement Batteries and Bulb for (13) Includes 2 AAA alkaline batteries, 1 pre-focused bulb. ORDERING INFORMATION: 9 HT 40822—Shpg. wt. 3 oz. \$1.19

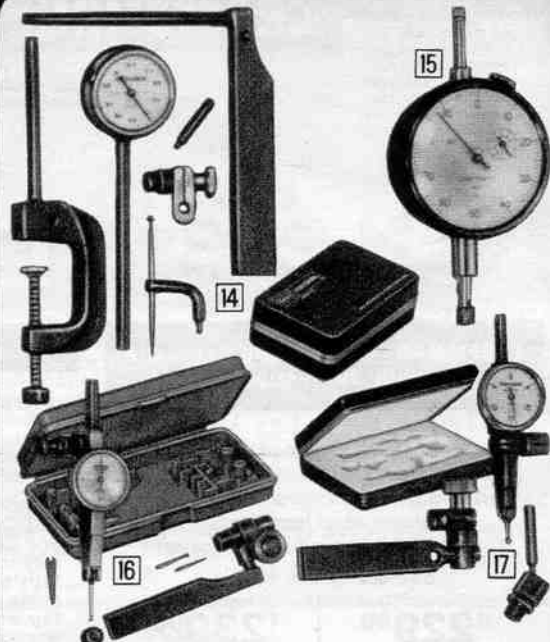

CRAFTSMAN® Dial Indicators

(14) **0-50-0 Dial Indicator Set.** CAPACITY: Dial reads 0 to 50 to 0 by .001 inch . . . marked "+" and "-" for reading deviations. Range of .200 inch (two revolutions). Plunger-back gauge, 1 1/2 in. diam. Meets Federal Specs. Mil-1-18422D for accuracy. ACCESSORIES: With universal clamp, tool post holder, C-clamp, hole lever attachment, 3 contact points, case. ORDERING INFORMATION: See warranty on facing page. 9 HT 3886—Shpg. wt. 1 lb. 13 oz. Set \$36.99

Dial Indicator alone. As described above. 9 HT 3867—Shipping weight 10 ounces \$19.99

(15) **0-100 Dial Indicator.** CAPACITY: Dial reads 0 to 100 by .001 inch. Range of 1.000 inch. Hard brass bearings for long life. Detachable steel point. Dial diameter 2 1/2 inches. Meets Federal Specifications Mil-1-18422D for accuracy. From England. ORDERING INFORMATION: See warranty on facing page. 9 HT 38683—Shipping weight 11 ounces \$25.99

(16) **0-10-0 Universal Test Indicator Set.** CAPACITY: Dial reads 0 to 10 to 0 by .0005 inch. Range of .0200 inch. Meets Federal Specifications Mil-1-18422D for accuracy. From England. ACCESSORIES: With 3 contact points, 2 stems (1/4 and 3/8 inch), wrench, universal holder and clamp with dovetail slots. Automatic reversal contact point. ORDERING INFORMATION: See warranty on facing page. 9 HT 40755—Shipping weight 1 lb. 2 oz. Set \$39.99

(17) **0-15-0 Universal Test Indicator Set.** CAPACITY: Dial reads 0 to 15 to 0 by .001 in. Range of .030 in. Meets Fed. Specs. Mil-1-18422D for accuracy. ACCESSORIES: With universal holder bar, clamp and storage case. ORDERING INFORMATION: See warranty on facing page. 9 HT 40761—Shpg. wt. 13 oz. Set \$29.99



(18) **Depth Gauge.** Hardened steel. Head graduated right and left to 30°, 45° and 60°. 2 1/4-in. head, 6x7/32 in. rule. Rule marked in 32nds and 64ths of an inch. Tensioned slide locks at any depth. ORDERING INFO: See warranty on facing page. 9 HT 40442—Shipping weight 4 ounces \$5.99

(19) **25-pc. Radius or Fillet Gauge Set.** Stainless steel. Corresponding external, internal forms. Includes: 16 gauges (1/32 to 1 1/4 by 64ths), 8 gauges (9/32 to 1 1/2 by 32nds), 4-in. gauge holder, case. Meet Fed. Specs. GGG-G-17a. Type VII for accuracy. ORDERING INFO: See warranty on facing page. 9 HT 40952—Shipping weight 1 pound Set \$24.99

(20) **Twueezers.** Nickel-plated steel. TYPES, ORDER INFO: See warranty, facing page.
6-inch straight end
9 HT 4459—Shipping weight 4 ounces \$1.69
6 1/2-inch bent end
9 HT 4460—Shipping weight 4 ounces \$1.69

(21) **Reference Table Rule.** Stainless steel. 6-in. long. Graduated in 32nds and 64ths of an inch. With decimal equivalents, tap and drill data. ORDERING INFO: See warranty on facing page. 9 HT 4011—Shipping weight 4 ounces \$1.99

(22) **Combination Rule.** Stainless steel. Graduated in 32nds and 64ths of an inch. Plastic storage case. ORDERING INFO: See warranty on facing page. 9 HT 4026—Shipping weight 4 ounces \$3.29

(23) **Protractor.** Stainless steel. Rectangular head. Scale double graduated 0 to 180°. Adjustable spring tension holds setting. Sets at true zero. ORDERING INFO: See warranty on facing page. 9 HT 4029—Shipping weight 5 ounces \$4.99

(24) **Magnetic Scale Magnifier.** Just place on metal rule or gauge . . . magnet holds in place. 5 power lens makes it easy to read graduations. ORDERING INFO: See warranty on facing page. 9 HT 40872—Shipping weight 4 ounces \$2.49

(25) **Stainless Steel Rules.** SIZES, ORDER INFO: Wt. 3 oz. Not Craftsman.

Catalog Number	Size inches	Graduations		Type	Each
		Front	Back		
9 HT 4030	6 x 1/2	1/16, 1/32 in.	Dec. equiv.	Flex.	79c
9 HT 4006	6 x 3/4	1/32, 1/64 in.	Dec. equiv.	Flex.	99c
9 HT 4035	6 x 1/2	1, 0.5mm		Flex.	69c

(26) **Chrome-plated Stainless Steel Rules.** SIZES AND ORDERING INFORMATION: See warranty on facing page.

Catalog Number	Size inches	Graduations		Type	Wt. oz.	Each
		Front	Back			
9HT40996	6 x 1 1/2	1/16, 1/32 in.	1/32, 1/64 in.	Flex.	3	\$2.69
9HT40136	6 x 3/4	1/8, 1/16 in.	1/32, 1/64 in.	Rigid	3	3.29
9HT40991*	12 x 1 1/4	1/32, 1/64 in.	1, 0.5mm	Rigid	5	6.99

*Carbon steel

All these CRAFTSMAN Tap and Die Sets come with hex-shaped dies that let you use sockets, open-end and adjustable wrenches in tight spots.

CRAFTSMAN® Tap and Die Sets

CRAFTSMAN® Tap and Die Set made of durable "high-speed" steel

Heat-treated high speed steel wears better, stays sharper longer than our carbon-steel sets. Taps are "cut-thread" tolerance—ideal for professional auto, farm and industrial repairs

59-Piece Set with Hex Dies

Standard Set
\$229⁰⁰

Metric Set
\$239⁰⁰

CONSTRUCTION: High speed steel. Black oxide coating reduces friction, gives smooth cutting action. Taps are "cut-thread" tolerance, produce Class II fit threads as specified by the National Bureau of Standards United States Department of Commerce.

SET COMPONENTS: 23 taps, 23 dies (13 one-inch diameter, eight 1 1/8-inch diameter, two pipe taps and dies). Two adjustable die stocks, one "T" handle tap wrench. Five screw extractors. Two tap reamer wrenches. Screwdriver, thread gauge, sectioned plastic storage case, complete use instructions.

ORDERING INFORMATION: See Warranty on page 67.

Standard Set.

See chart below for list of thread types, sizes.

Shipping weight 13 pounds 12 ounces.

9 HT 52311Set \$229.00

Metric Set.

See chart below for list of thread types, sizes.

Shipping weight 13 pounds 12 ounces.

9 HT 52001Set \$239.00

STANDARD THREAD TYPES AND SIZES

Type of Cut	Thread Sizes	76-piece Set 52131	59-piece Sets 52151 52311	41-piece Sets 5209 5201	28-piece Set 5200	22-piece Set 52121
Cuts National Coarse (USC) threads	1/4-20	X	X	X	X	X
	3/8-16	X	X	X	X	
	1/2-13	X	X	X	X	
	5/8-11		X			
	3/4-10	X	X	X	X	
	7/8-9	X	X	X	X	
	1-8	X	X	X	X	
	1 1/8-7	X	X	X	X	
Cuts National Fine threads	1/4-28	X	X	X	X	X
	3/8-24	X	X	X	X	
	1/2-20	X	X	X	X	
	5/8-18		X			
	3/4-16	X	X	X	X	
	1-14	X	X	X	X	
	1 1/8-12	X	X	X	X	
	1 3/8-11	X	X	X	X	
Cuts machine screw threads	4-40	X		X		X
	6-32	X	X	X		X
	8-32	X	X	X		X
	10-24	X	X	X		X
	10-32	X	X	X		X
	12-24	X	X	X		X
	14-12	X	X	X		X
	16-10	X	X	X		X
NPT Pipe thread	1/4-28		X			
	1/2-27	X	X	X	X	

Kromedge® Sets made of Carbon Steel

76-pc. Standard and Metric Set (59, 41 and 28-pc. sets available in Standard or Metric sizes) **\$89⁹⁹**

CONSTRUCTION: Tempered carbon-steel for durability. Kromedge® finish for smooth cutting action. Chrome-plated.

76-piece Set

SET COMPONENTS: 34 taps and 34 dies in standard and metric sizes. (32 dies, 2 pipe taps and dies). 1 adjustable guide die stock. 2 "T" handle tap wrenches. 1 tap reamer wrench. Screwdriver, thread gauges for standard and metric. Case, instr.

ORDERING INFORMATION: See Warranty on page 67. See chart below for Standard and Metric thread types and sizes. Shipping weight 8 lbs. 8 oz.

9 HT 52131Set \$89.99

59-piece Sets

SET COMPONENTS: 23 taps, 23 dies (13 one-inch and eight 1 1/8-inch diameter, 2 pipe taps, dies). 2 adjustable guide die stocks. "T" handle tap wrench. 5 screw extractors. 2 tap reamer wrenches. Screwdriver, thread gauge, case, instructions.

ORDERING INFORMATION: See Warranty on page 67. See chart below for thread types and sizes.

Standard Set. Wt. 13 lbs. 12 oz.

9 HT 52151Set \$99.99

Metric Set—Wt. 13 lbs. 12 oz.

9 HT 52096Set \$104.99

41-piece Sets

SET COMPONENTS: 17 taps and 17 dies (1-in. diameter, one pipe tap and die). Adjustable guide die stock, two "T" handle tap wrenches. Tap reamer wrench, thread gauge, case, instructions.

ORDERING INFORMATION: See Warranty on page 67. See chart below for thread types and sizes.

Standard Set

Shipping weight 4 lbs. 15 oz.

9 HT 5201Set \$49.99

Metric Set—Wt. 4 lbs. 15 oz.

9 HT 52095Set \$52.99

28-piece Sets

SET COMPONENTS: 11 taps and 11 dies (ten 1-in. diameter, 1 pipe tap and die). Adjustable guide die stock. "T" handle tap wrench. Tap reamer wrench. Screwdriver, thread gauge, case, instructions.

ORDERING INFORMATION: See Warranty on page 67. See chart below for thread types and sizes.

Standard Set—Wt. 3 lbs. 12 oz.

9 HT 5200Set \$39.99

Metric Set—Wt. 4 lbs. 2 oz.

9 HT 52093Set \$41.99

METRIC THREAD TYPES AND SIZES

Type of Cut	Thread Sizes (mm)	76-piece Set 52131	59-piece Sets 52001 52096	41-piece Set 52095	28-piece Set 52093	22-piece Set 52101
Metric threads	3 x .50	X		X		X
	3 x .60	X	X	X	X	X
	4 x .70	X	X	X	X	X
	4 x .75	X	X	X	X	X
	5 x .80	X	X	X	X	X
	5 x .90	X	X	X	X	X
	6 x 1.00	X	X	X	X	X
	7 x 1.00	X	X	X	X	X
	8 x 1.25	X	X	X	X	
	9 x 1.00	X	X	X		
	9 x 1.25	X	X	X	X	
	10 x 1.25	X	X	X		
	10 x 1.50	X	X	X	X	
	11 x 1.50	X	X	X		
	12 x 1.50	X	X	X	X	
BSP Pipe thread	12 x 1.75	X	X	X	X	
	14 x 1.25	X	X			
	14 x 2.00	X	X			
	16 x 1.50	X	X			
	16 x 2.00	X	X			
	18 x 1.50	X	X			
	18 x 2.50	X	X			X2
	1/4 x 28	X	X	X	X	X2
	1/4 x 19	X	X			X2



Miniature Tap and Die Sets for model makers and delicate instrument repair work

22-pc. Standard or Metric Set

CONSTRUCTION: Kromedge® carbon steel.

SET COMPONENTS: 8 taps and 8 dies (1 1/8-in. diameter), hexagon die stock. "T" handle tap wrench, tap reamer wrench, screwdriver, thread gauge. Includes tap and drill card, case, instructions.

ORDERING INFORMATION: See Warranty on page 67. See chart at left for list of thread types and sizes.

Standard Set—Wt. 2 lbs. 8 oz.

9 HT 52121Set \$22.99

Metric Set—Wt. 2 lbs. 8 oz.

9 HT 52101Set \$24.99

Carbon Steel Tap and Die Set



(1) 12-piece Set

CONSTRUCTION: Carbon steel.

COMPONENTS, SIZES: Five 1 1/8-in. diameter hex dies, 5 standard taps. Cut sizes 1/4-20, 10-24, 10-32, 8-32, 6-32. Tap wrench and case included.

ORDERING INFORMATION:

Shipping weight 10 oz.

9 HT 52118Set \$8.99



Rethreading Tools

(2) Tap Sets for Coarse and Fine Internal Threads

CONSTRUCTION: Carbon steel.

COMPONENTS, SIZES: 6 taps cut 1/4, 3/8, 1/2, 5/8, 3/4 inch sizes. Plastic storage case.

ORDER INFO: Wt. 10 oz.

With National Fine (SAE) Taps.

9 HT 52114Set \$5.29

With National Coarse (USS) Taps.

9 HT 52113Set \$5.29

(3) Die Sets for Fine and Coarse External Threads

CONSTRUCTION: Carbon steel.

COMPONENTS, SIZES: 8 dies cut 1/4, 3/8, 1/2, 5/8, 3/4 inch sizes. Plastic storage case.

ORDER INFO: Wt. 6 oz.

With National Fine (SAE) Dies.

9 HT 52112Set \$5.29

With National Coarse (USS) Dies.

9 HT 52111Set \$5.29

41-pc. Tap and Die Set with round steel dies **\$59⁹⁹**



CONSTRUCTION: Tempered carbon steel. Kromedge® finish. Chrome-plated.

SET COMPONENTS: 17 taps, 17 dies (adjustable round, 1-in. diameter . . . use only with the stocks, one solid pipe tap and die). Adjustable guide die stock. Tap reamer wrench, two "T" handle tap wrenches, thread gauge, screwdriver, sectioned plastic storage case and use instructions.

ORDERING INFORMATION: See Warranty on page 67. See chart above for list of thread types and sizes.

9 HT 5208—Shipping weight 4 pounds 8 ouncesSet \$59.99

STANDARD-Taps and Dies

SIZES, TYPES, ORDERING INFORMATION:

Size of item	Taps			Die diam.	Adjustable Round Dies			Hex Dies		
	Cat. No.	Wt.	Price		Cat. No.	Wt.	Price	Cat. No.	Wt.	Price
National Coarse (USC) Threads										
1/4-20	9 HT 5222	2 oz.	95c	1 in.	9 HT 5226	3 oz.	\$1.75	9 HT 5227	3 oz.	\$1.25
3/8-16	9 HT 5222	2 oz.	\$1.05	1 in.	9 HT 5226	3 oz.	1.75	9 HT 5227	3 oz.	1.25
1/2-14	9 HT 5221	3 oz.	1.25	1 in.	9 HT 5226	3 oz.	1.75	9 HT 5227	3 oz.	1.25
3/4-12	9 HT 5223	3 oz.	1.45	1 in.	9 HT 5226	3 oz.	1.75	9 HT 5227	3 oz.	1.25
1-10	9 HT 5224	3 oz.	1.65	1 in.	9 HT 5226	3 oz.	1.75	9 HT 5227	3 oz.	1.25
1 1/8-8		4 oz.		1 1/8 in.	9 HT 5226	4 oz.	4.35	9 HT 5227	4 oz.	3.85
1 1/4-7	9 HT 5225	4 oz.	2.35	1 1/2 in.	9 HT 5226	4 oz.	4.35	9 HT 5227	4 oz.	3.85
1 1/2-6	9 HT 5226	5 oz.	2.85	1 3/4 in.	9 HT 5226	4 oz.	4.35	9 HT 5227	4 oz.	3.85
1 3/4-5	9 HT 5227	7 oz.	3.85	2 in.	9 HT 5226	4 oz.	4.35	9 HT 5227	4 oz.	3.85

National Fine (SAE) Threads										
1/4-28	9 HT 5221	2 oz.	95c	1 in.	9 HT 5225	3 oz.	\$1.75	9 HT 5228	3 oz.	\$1.25
3/8-24	9 HT 5221	2 oz.	\$1.05	1 in.	9 HT 5225	3 oz.	1.75	9 HT 5228	3 oz.	1.25
1/2-20	9 HT 5221	3 oz.	1.25	1 in.	9 HT 5225	3 oz.	1.75	9 HT 5228	3 oz.	1.25
3/4-16	9 HT 5221	3 oz.	1.45	1 in.	9 HT 5225	3 oz.	1.75	9 HT 5228	3 oz.	1.25
1-12	9 HT 5221	4 oz.	1.65	1 in.	9 HT 5225	3 oz.	1.75	9 HT 5228	3 oz.	1.25
1 1/8-8	9 HT 5221	4 oz.	2.35	1 1/8 in.	9 HT 5225	4 oz.	4.35	9 HT 5228	4 oz.	3.85
1 1/4-7	9 HT 5221	5 oz.	2.85	1 1/2 in.	9 HT 5225	4 oz.	4.35	9 HT 5228	4 oz.	3.85
1 1/2-6	9 HT 5221	7 oz.	3.85	1 3/4 in.	9 HT 5225	4 oz.	4.35	9 HT 5228	4 oz.	3.85

Machine Screw Taps and Dies—all N.C. (except 10-32 is N.F.)										
4-40	9 HT 52192	2 oz.	75c	1 in.	9 HT 52232	3 oz.	\$1.75	9 HT 5229	3 oz.	\$1.25
6-32	9 HT 52192	2 oz.	75c	1 in.	9 HT 52232	3 oz.	1.75	9 HT 5229	3 oz.	1.25
8-32	9 HT 52192	2 oz.	75c	1 in.	9 HT 52232	3 oz.	1.75	9 HT 5229	3 oz.	1.25
10-24	9 HT 52198	2 oz.	75c	1 in.	9 HT 52232	3 oz.	1.75	9 HT 5229	3 oz.	1.25
10-32	9 HT 5220	2 oz.	85c	1 in.	9 HT 5224	3 oz.	1.75	9 HT 5229	3 oz.	1.25
12-24	9 HT 52201	2 oz.	85c	1 in.	9 HT 52241	3 oz.	1.75	9 HT 5229	3 oz.	1.25


*Round dies, 1 1/2 in. diameter. Hex dies, 1 1/2 in. diameter.
 9 HT 5230—1/2-inch hex Pipe Die, NPT thread. Shpg. wt. 3 oz. \$1.25
 9 HT 52238—1/4-inch hex Pipe Die, NPT thread. Shpg. wt. 5 oz. 3.85

METRIC-Size Taps and hex Dies

SIZES, TYPES, ORDERING INFORMATION:

Taps				Die Diam.	Dies			
(mm)	Catalog No.	Wt.	Ea.		(mm)	Catalog No.	Wt.	Ea.
3 x .50	9 HT 52031	2 oz.	95c	1 in.	3 x .50	9 HT 52011	3 oz.	\$1.35
3 x .60	9 HT 52032	2 oz.	95c	1 in.	3 x .60	9 HT 52012	3 oz.	1.35
4 x .70	9 HT 52033	2 oz.	95c	1 in.	4 x .70	9 HT 52013	3 oz.	1.35
4 x .75	9 HT 52034	2 oz.	95c	1 in.	4 x .75	9 HT 52014	3 oz.	1.35
5 x .80	9 HT 52035	2 oz.	95c	1 in.	5 x .80	9 HT 52015	3 oz.	1.35
5 x .90	9 HT 52036	2 oz.	95c	1 in.	5 x .90	9 HT 52016	3 oz.	1.35
6 x 1.00	9 HT 52037	2 oz.	\$1.15	1 in.	6 x 1.00	9 HT 52017	3 oz.	1.35
7 x 1.00	9 HT 52038	3 oz.	1.25	1 in.	7 x 1.00	9 HT 52018	3 oz.	1.35
8 x 1.25	9 HT 52039	3 oz.	1.45	1 in.	8 x 1.25	9 HT 52019	3 oz.	1.35
9 x 1.00	9 HT 52041	3 oz.	1.55	1 in.	9 x 1.00	9 HT 52021	3 oz.	1.35
9 x 1.25	9 HT 52042	3 oz.	1.55	1 in.	9 x 1.25	9 HT 52022	3 oz.	1.35
10 x 1.00	9 HT 52081	3 oz.	1.75	1 in.	10 x 1.25	9 HT 52023	3 oz.	1.35
10 x 1.25	9 HT 52043	3 oz.	1.75	1 in.	10 x 1.50	9 HT 52024	3 oz.	1.35
10 x 1.50	9 HT 52044	3 oz.	1.75	1 in.	11 x 1.50	9 HT 52025	3 oz.	1.35
11 x 1.50	9 HT 52045	3 oz.	1.95	1 in.	12 x 1.50	9 HT 52026	3 oz.	1.35
12 x 1.50	9 HT 52046	3 oz.	2.15	1 in.	12 x 1.75	9 HT 52027	3 oz.	1.35
12 x 1.75	9 HT 52047	3 oz.	2.15	1 1/2 in.	12 x 1.50	9 HT 52071	5 oz.	4.45
14 x 1.25	9 HT 52061	4 oz.	2.65	1 1/2 in.	12 x 1.75	9 HT 52072	5 oz.	4.45
14 x 2.00	9 HT 52062	4 oz.	2.65	1 1/2 in.	14 x 1.25	9 HT 52073	5 oz.	4.45
16 x 1.50	9 HT 52063	5 oz.	3.15	1 1/2 in.	14 x 2.00	9 HT 52074	5 oz.	4.45
16 x 2.00	9 HT 52064	5 oz.	3.15	1 1/2 in.	16 x 1.50	9 HT 52075	5 oz.	4.45
18 x 1.50	9 HT 52065	7 oz.	3.85	1 1/2 in.	16 x 2.00	9 HT 52076	5 oz.	4.45
18 x 2.50	9 HT 52066	7 oz.	3.85	1 1/2 in.	18 x 1.50	9 HT 52077	5 oz.	4.45
1/4 x 19*	9 HT 52067	4 oz.	2.25	1 1/2 in.	18 x 2.50	9 HT 52078	5 oz.	4.45

*British Standard thread pipe tap 1 British Standard thread pipe die



(13) Tap and Reamer Wrenches

CONSTRUCTION: Alloy steel jaws.
 ORDERING INFORMATION:

No. 4 Wrench, 1/4 to 1/2-in. taps.
 9 HT 5214—Wt. 10 oz. \$3.99

No. 6 Wrench, 1/2 to 3/4-in. taps.
 9 HT 52141—Wt. 11 lb. 10 oz. \$6.99

(14) Adjust. Guide Die Stocks

CONSTRUCTION: Alloy steel.
 ORDERING INFORMATION:

For 1-in. hex dies
 9 HT 52182—Wt. 14 oz. \$4.49

For 1 1/2-in. round dies, 1 1/8-in. hex shaped dies
 9 HT 52181—Wt. 1 lb. 14 oz. \$7.49

For 1-in. shaped dies
 9 HT 52185—Shpg. wt. 11 oz. \$4.49

(15) Hand Reamer

CONSTRUCTION: Steel. Reams 1/8 to 3/8-in. diameter.

ORDERING INFORMATION:
 9 HT 5492—Wt. 6 oz. \$4.99

(16) Tapered Reamer

CONSTRUCTION: Heat-treated steel. For 1/8 to 1/2-in. holes, 5/8-in. long.

ORDERING INFORMATION:
 9 HT 5479—Wt. 5 oz. \$4.99

Thread gauges. As in sets, page 88.
 ORDER INFO: Wt. 3 oz.

9 HT 52229—Standard \$2.49
 9 HT 52029—Metric 2.49

(17) Adjustable Ratchet Tap Wrench

Steel. Centerless ground, polished. Self-equalizing jaws. Deep seating teeth. 3/16-in. cap. "T" handle.

ORDERING INFORMATION:
 9 HT 4065—Shpg. wt. 12 oz. \$7.99

(18) Tap Wrenches. Steel.

ORDERING INFORMATION:

Fits up to 12 machine screw and 3 to 5mm taps.
 9 HT 42101—Shpg. wt. 4 oz. 99c

Fits 1/16 to 1/4-in.; up to 14 machine screw and up to 5mm taps.
 9 HT 4066—Shpg. wt. 8 oz. \$3.99

Fits 12 to 3/16-in.; 5 to 8mm taps.
 9 HT 42102—Shpg. wt. 6 oz. 1.49

Fits 1/4 to 1/2-in.; 6 to 12mm taps.
 9 HT 4067—Shpg. wt. 15 oz. 4.99

Use with ratchets and 1/4, 1/2-in. taps.
 9 HT 42103—Shpg. wt. 9 oz. \$1.99

(19) Tap and Drill Set. 6 Kromedge steel machine taps

(4-40, 6-32, 8-32, 10-32, 10-24, 1/4-20) drill sizes above; flutes (sizes 43, 36, 29, 25, 21, 7), "T" handle tap wrench, case.
 ORDERING INFORMATION:
 9 HT 5208—Shpg. wt. 10 oz. \$8.99

Permanex Cases

ORDERING INFORMATION:

Case as in 59-pc. sets on page 88
 9 HT 5218—Shpg. wt. 3 lbs. 7 oz. \$9.99

Case as in 41-pc. set on page 88
 9 HT 5219—Wt. 1 lb. 4 oz. \$5.99



(1) Flush-cutting Saw.

Designed with front end grip and tension wheel which combine to keep blade rigid in any position.

CONSTRUCTION: Die-cast aluminum frame, chrome-plated tube and plastic handle insert. Holds one 12-inch blade. Cuts in 6 different positions. Storage chamber for up to 6 spare blades.

ORDERING INFO:
 Shpg. wt. 1 lb. 9 oz.
 9 HT 3559 \$6.49

(2 and 3) Flush and Standard-cutting Saws

CONSTRUCTION: Polished nickel-plated saws—welded steel frame with reinforced back. One 10-inch blade (9 HT 65873) included.

ORDERING INFORMATION:

(2) Standard-cutting Saw. Cuts in 4 different positions; vertical or horizontal, to right or left. Plastic pistol-grip handle.
 9 HT 3562—Shipping weight 1 lb. 12 oz. \$4.49

(3) Flush-cutting Saw. Cuts in 6 positions. Plastic enclosed handle.
 9 HT 3558—Shipping weight 2 pounds \$5.49

(4) Close quarter Hacksaw. Uses any hacksaw blade. Comes with one 10-inch blade.

ORDERING INFORMATION:
 9 HT 35481—Shipping weight 12 ounces \$3.99

(5 thru 7) CRAFTSMAN Hacksaw Blades. From Sweden.

(A) Semi-flexible blades; Alloy steel. Pkg. of 5. (B) High-Speed Design: Molybdenum alloy steel, lasts longer than (A). Pkg. of 2.

SIZES, TYPES, ORDERING INFORMATION:

Teeth	Lgth.	Cuts	(A) Cat. No.	Wt.	Pkg.	(B) Cat. No.	Wt.	Pkg.
(5)	32	10 Tubing to 1/8-in. thin metal sheets	9 HT 65875	5	\$1.09	9 HT 65885	4	\$1.49
	12	10 Iron pipe, med. tubing 1/2-1/4 in.	9 HT 65876	5	1.29	9 HT 65886	4	1.69
(6)	24	10 Steel bars, brass, copper 1/4 in.	9 HT 65873	5	1.09	9 HT 65883	4	1.49
	12	10 Steel bars, brass, copper 1/4 in.	9 HT 65874	5	1.29	9 HT 65884	4	1.69
(7)	18	10 Steel bars, brass, copper 1/4 in.	9 HT 65871	5	1.09	9 HT 65881	4	1.49
	12	10 Steel bars, brass, copper 1/4 in.	9 HT 65872	5	1.29	9 HT 65882	4	1.69

Pickup Tools and Magnets



Use these tools to retrieve or remove small metal fragments from tight places.

(8) Pickup Tool. Steel jaws. Push-button to open, release to close.
 ORDERING INFO:
 23 1/2 inches long.
 Shpg. wt. 7 oz.
 9 HT 41322 \$1.99


12 inches long.
 Shpg. wt. 5 oz.
 9 HT 41321 \$1.69

(9) Flexible Magnetic Pickup Tool. Spring shaft. Permanent head. Plastic handle. Nickel plated. 17 1/2 in. long.
 ORDER INFO: Wt. 5 oz.
 9 HT 4178 \$2.39

(10) Magnetic Pickup Tool/Stud Finder. Magnet both ends. Pocket clip. 5 3/4 inches long.
 ORDER INFO: Wt. 3 oz.
 9 HT 4001 \$1.49

(11) Magnetic Pickup Tool with extension. Extends to 26 1/4 in. Lifts up to 8 oz. Double ball, socket joint. 2 3/4 in. long.
 ORDER INFO: Wt. 9 oz.
 9 HT 4132 \$2.99

(12) CRAFTSMAN Horseshoe Magnet. Permanent type. Lifts up to 10 lbs. Plastic frame. 3 in. long.
 ORDER INFO: Wt. 4 oz.
 9 HT 4003 \$1.19

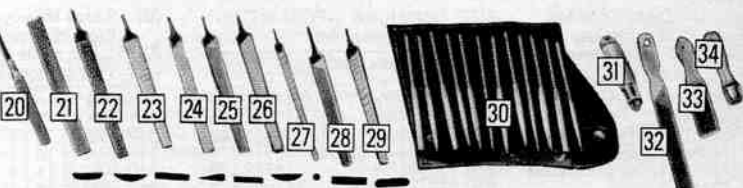

(20) CRAFTSMAN Ignition File. Double-cut teeth. Kromedge steel. 5-in. long.

ORDERING INFORMATION:
 9 HT 3119—Shpg. wt. 3 oz. 49c

(21 thru 29) CRAFTSMAN Files. Chrome-plated steel. Plastic cases. From Western Europe and India.

TYPES, SIZES, ORDERING INFO:

Type	Catalog No.	Size	Wt.	Each
(21) Shoe Rasps	9 HT 31224	8 in.	7 oz.	\$1.99
	9 HT 31225	10 in.	10 oz.	2.59
(22) Wood Rasps	9 HT 31215	10 in.	11 oz.	2.99
(23) Mill Files	9 HT 31292	6 in.	4 oz.	99c
	9 HT 31294	8 in.	6 oz.	1.59
	9 HT 31295	10 in.	9 oz.	1.99
(24) Crosscut Saw File	9 HT 3120	8 in.	6 oz.	1.99
(25) Flat Bastard File	9 HT 31254	8 in.	7 oz.	1.89
	9 HT 31255	10 in.	12 oz.	2.19
(26) Half Round Bastard File	9 HT 31234	8 in.	7 oz.	1.99
	9 HT 31235	10 in.	11 oz.	2.99
(27) Round Bastard File	9 HT 31244	6 in.	4 oz.	1.19
	9 HT 31246	8 in.	5 oz.	1.39
	9 HT 31245	10 in.	7 oz.	1.79
(28) Warding File	9 HT 3132	4 in.	2 oz.	99c
(29) Mill File (Two round edges)	9 HT 3128	8 in.	6 oz.	1.59

File Assortment. Sep. prices total \$6.36. Assortment includes one each of 8 inch files (23), (25), (27) in chart above plus one of (9 HT 3115) at right.

ORDERING INFORMATION:
 9 HT 31299—Shpg. wt. 1 lb. 9 oz. \$5.50

(30) CRAFTSMAN Needle File Set. Swiss pattern. Kromedge steel. Medium cut. No. 2 files. 5 1/2-in. long. Set of 12. Western Europe.

ORDERING INFORMATION:
 9 HT 6759—Shpg. wt. 9 oz. Set \$12.99

(31) CRAFTSMAN Adjustable File and Tool Handle. For tools with tangs up to 1/4-in. diameter. Use as handle for files, rasps, blades.

ORDERING INFORMATION:
 9 HT 6775—Shpg. wt. 6 oz. \$1.90

(32)

Power Drain Cleaner Shoots a blast of air to clear blockages in pipes from 1/2 to 2 in. in diameter

\$49.99 without
bulbs

You can clear blockages in drains, heating and cooling systems with pipes from 1/2 to 2 inches in diameter. Power Drain Cleaner can clean entire line up to 250 feet. Works in 30 seconds or less without caustic chemicals or augers. Imported from England.

DISCHARGE GUN: Aluminum construction. Discharges air from carbon dioxide bulb, sold separately below. One bulb can clear one blockage.

DRAIN COVERS: 6 rubber drain covers (1, 1 1/2, 2, 2 1/2, 3, 6-inch sizes).

ORDER INFO: Wt. 4 lbs.

9 HT 55471.....\$49.99

Carbon dioxide Bulbs. One bulb clears one blockage. Box of 10.

ORDER INFO: Wt. 15 oz.

9 HT 55473.....Box \$2.50

Safe for pipes,
sinks, tubs

Order bulbs
separately
at right



(1) Drill-powered Drain Auger

Hooks up to your 1/4, 3/8 or 1/2-in.
drill to bore through most packed
deposits in drains or pipes

\$27.99

Attach this drain auger to your own 1/4, 3/8, or 1/2-inch electric drill. Opens most household clogged drains without chemicals that can damage pipes.

CONSTRUCTION: Drophead, attached to end of coil, is designed to turn as it digs... packed deposits in pipes and drains are bored loose. 1/4-inch piano wire coil is 25 feet long. Coil is neatly stored in steel canister... zinc-plated to resist rust and corrosion. Feed coil into drain by loosening collet nut and pulling coil out.

ORDERING INFORMATION:
See our complete selection of electric drills on pages 122 and 123.

Shipping weight 8 lbs. 8 oz.

9 HT 55472.....\$27.99

(2 thru 4) Drain Augers and Sewer Rods

(2) **Crank-feed Drain Auger.** 25 ft. wire coil. CONSTRUCTION: 1/4-in. wire coil rewinds into rust-resistant steel canister. Tumble head with 2 universal joints.

ORDERING INFORMATION:
9 HT 55356—Wt. 6 lbs. 8 oz.....\$14.99

(3) **Flat Sewer Rods**
CONSTRUCTION: High-carbon snake steel. Revolving spear point. Handle grips rod at any point. Steel frame for storage.

SIZES, ORDERING INFORMATION:

Catalog Number	Length ft.	Width in.	Thickness inches	Shpg. wt.	Price
9 HT 5509C	50	1 1/2	1/16	8 lbs.	\$12.49
9 HT 55391C	75	3/4	1/16	12 lbs.	23.99
9 HT 55091C	75	3/4	1/8	21 lbs.	39.99
9 HT 5540C	100	3/4	1/8	16 lbs.	29.99
9 HT 55092C	100	3/4	1/8	38 lbs.	59.99
9 HT 55093C	150	3/4	1/8	53 lbs.	79.99

(4) **Drain and Trap Auger**
CONSTRUCTION: 3/8-inch spring steel coil. Auger handle grips spring at any point. Coil measures 50 feet long.

ORDERING INFORMATION:
9 HT 55345—Wt. 12 lbs. 2 oz.....\$12.99

Pipe Wrenches

(6) Heavy-duty Pipe Wrench **\$4.49** 8-in. size

(5) CRAFTSMAN Heavy-duty Pipe Wrench

\$5.99 8-in. size

(5) CRAFTSMAN Heavy-duty Pipe Wrench

CONSTRUCTION: One-piece cast-iron housing, frame and handle. Designed for strength. Forged-steel jaws. Teeth are milled and pitched.

SIZE, ORDERING INFORMATION:
See warranty, page 94.

Catalog Number	Size in.	Cap. in.	Wt. lbs. oz.	Price
9 HT 55675	8	1	1 1	\$5.99
9 HT 55676	10	1 1/2	2 2	7.99
9 HT 55677	14	2	3 14	10.99
9 HT 55678	18	2 1/2	6 3	14.49
9 HT 55679	24	3	9 15	22.99
9 HT 5567C	36	5	19 ...	49.99

(6) Sears Heavy-duty Pipe Wrench

As (5), but made in Japan.

SIZE, ORDERING INFO:

Catalog Number	Size in.	Cap. in.	Wt. lbs. oz.	Price
9 HT 30856	8	1	1 3	\$4.49
9 HT 30851	10	1 1/2	1 14	5.99
9 HT 30852	14	2	3 8	7.99
9 HT 30854	18	2 1/2	5 13	10.49

(7 thru 11) Pipe and Plumbing Wrenches

(7) **CRAFTSMAN Big Strap Wrench.** Has 1/2 to 2 inch capacity.

CONSTRUCTION: Cast-iron handle, 12 in. long. Adjustable nylon strap helps protect finish of nickel, chrome-plating or plastic pipes and fixtures.

ORDERING INFORMATION:
See warranty, p. 94.
Wt. 2 lbs. 2 oz.

9 HT 55708.....\$10.99

(8) **CRAFTSMAN Reversing Pipe Wrenches**
CONSTRUCTION: Forged high-carbon boron steel handle and chain. Ratcheting-type.

SIZE, CAPACITY, ORDER INFO: See warranty, p. 94.

4-in. outside diam. capacity. 12-in. handle, 15 in. chain. Wt. 1 lb. 12 oz.

9 HT 55713.....\$8.49

5-in. outside diam. capacity. 16-in. handle, 19 1/2-in. chain. Wt. 3 lbs. 5 oz.

9 HT 55714.....\$9.99

(9) Angle-Tapered Seat Wrench

Fits square or hex holes... step-style gives positive-grip.

CONSTRUCTION: Cadmium-plated steel. "L" shaped to give you just the right angle.

ORDER INFO: Not Craftsman.

Shpg. wt. 11 oz.

9 HT 55652.....\$2.99

(10) Slip and Locknut Wrench

CONSTRUCTION: Cadmium-plated malleable iron, 10 1/2 inches long. Adjustable jaws shaped for slip-nuts on "P" or "S" sink traps. 3/4 to 3-in. jaw capacity.

ORDER INFO:
Shpg. wt. 1 lb. 10 oz.

9 HT 55651.....\$6.49


(11) CRAFTSMAN Basin Wrench

CONSTRUCTION: Steel handle measures 11 inches long. Self-adjusting, high-carbon steel jaws with return spring. Capacity of 1 1/8 inches.

ORDER INFO: See warranty, p. 94.

Shpg. wt. 1 lb. 4 oz.

9 HT 55686.....\$4.99

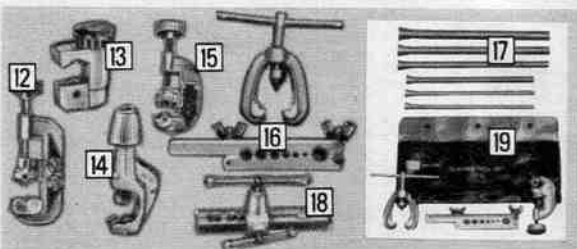

CRAFTSMAN® Tubing Tools... you can cut, bend, join and flare thinwall tubing

(12) Tubing Cutter for 1/4 to 1 1/2-in. outside diameter tubing

CONSTRUCTION: Steel alloy cutting wheel. Zinc frame. Twin reamers and 2 facing, flare-groove rollers.

ORDERING INFO: See warranty, p. 94. Wt. 1 lb. 6 oz.

9 HT 5528.....\$6.99

(13) Tubing Cutter for 1/4 to 1 1/2-in. outside diameter tubing

CONSTRUCTION: Steel alloy cutting wheel. Zinc frame. Feed knob.

ORDERING INFO: See warranty, p. 94. Wt. 6 oz.

9 HT 5560.....\$3.49

(14) Tubing Cutter for 1/4 to 1 1/2-in. outside diameter tubing

CONST.: Two alloy steel cutting wheels. Zinc frame. Slide-lock retractable safety reamers, 2 facing flare-groove rollers. Feed knob. Enclosed feed design.

ORDERING INFO: See warranty, p. 94. Wt. 15 oz.

9 HT 5531.....\$6.59

(15) Tubing Cutter for up to 1-in. outside diameter tubing

CONST.: Steel alloy cutting wheel. Zinc frame. Slide-lock reamer, 2 facing rollers. Feed knob.

ORDER INFO: See warranty, p. 94. Wt. 12 oz.

9 HT 5533.....\$4.49

(16) Flaring Tool. For 7 thinwall tubing sizes: 3/16, 1/4, 5/16, 3/8, 7/16, 1/2, and 5/8-inch outside diameter.

CONST.: Steel yoke, swivel cone, steel slide-bar handle.

ORDERING INFO: See warranty, p. 94. Wt. 2 lbs. 4 oz.

9 HT 55371.....\$12.49

(17) 6-pc. Tube-Bending Set. For thinwall tubing with 1/4 to 3/8-in. outside diameter.

CONSTRUCTION: Tempered, spring-steel tubes with flared ends. Cadmium-plated.

ORDERING INFO: See warranty, p. 94. Wt. 1 lb. 15 oz.

9 HT 55411.....Set \$3.49

(18) Extra-heavy-duty Flaring Tool. For 8 thinwall sizes: 3/16, 1/4, 5/16, 3/8, 7/16, 1/2, 5/8, 3/4-in. outside diameter.

CONSTRUCTION: Rigid ductile iron frame. Steel die bar.

ORDER INFO: See warranty, p. 94. Wt. 3 lbs.

9 HT 55481.....\$29.99

(19) 9-pc. Flaring Tool Set. For copper, aluminum, brass and thinwall tubing.

SET: Includes Tubing Cutter (15), Flaring Tool (16), 6-pc. Tube-bending Set (17), and plastic storage pouch.

ORDERING INFO: See warranty, p. 94. Wt. 4 lbs. 10 oz.

9 HT 55271.....Set \$19.99

Replacement Cutter Blade

For (12), (14), (15).

ORDER INFO: Wt. 3 oz.

9 HT 5529.....\$9.99



90 Sears COMPBK LAEGJD

Propane Kits and Mapp® Gas Kits

Instant-action levers control flame for safety, convenience and fuel efficiency

Propane Kits and Accessories

(1) 13-piece Kit

KIT COMPOSITION: Fuel-saving torch has instant-action lever; pencil flame burner; 14.1-oz. by wt. cylinder; extra cylinder; utility burner; spark lighter; 6 extra flints; plastic case; soldering tip and flame spreader that fit pencil flame and utility burners.

ORDER INFO: UL listed. See "N" suffix note, page 82.
9 HT 54285N—Wt. 7 lbs.* ..\$18.99

Instant-action Torch alone. As in kit above. With pencil flame burner, cylinder. UL listed.

ORDER INFO: See "N" suffix note, page 82.
9 HT 54281N—Wt. 3 lbs.* ..\$11.99

Regular-action Torch. As torch above, but without instant-action lever. With pencil flame burner and cylinder. UL listed.

ORDER INFO: See "N" suffix note, page 82.
9 HT 54251N—Wt. 3 lbs.* ..\$7.99

*Note to Alaska and Hawaii customers: Propane and Mapp Gas cylinders must, by law, be shipped via surface transportation. Please contact local selling unit, before ordering. Allow extra time for delivery.

6-piece Kit. (Not shown.)

KIT COMPOSITION: Regular-action torch; pencil flame burner; 14.1-ounce by weight cylinder; needle valve for shut-off; utility burner; spark lighter; soldering tip; flame spreader; plastic case.

ORDER INFO: UL listed. See "N" suffix note, page 82. Wt. 4 lbs.*
9 HT 54261N\$15.99

Extra Propane Cylinder. For torches, camping equipment, etc. Holds 14.1-ounces by weight, 26.7 fluid ounces.

ORDER INFO: See "N" suffix note, p. 82. Wt. each 3 lbs.* Wt., pkg. of 12, 24 lbs.*

9 HT 5491N ..Ea. \$1.69; 2 for \$3.15
9 HT 54914N—Pkg. of 1218.25

Jumbo Propane Cylinder. (Not shown.) Tank holds 16.4 oz. by weight, 31.1 fluid ounces.

ORDER INFORMATION: See "N" suffix note on page 82.
9 HT 54912N—Wt. 3 lbs.* ..\$1.89

Mapp® Gas Kits and Accessories

(2) 16-piece Mapp Gas Kit

Mapp Gas torches burn hotter, work faster and use less fuel than propane torches shown at left. Each cylinder contains 14% more usable fuel than comparable propane cylinders. It's the ideal tool for projects which require greater heat; customizing cars and brazing copper and steel.

KIT COMPOSITION: Torch has instant-action lever that helps you save fuel and allows greater safety, as you control height of flame. Pressure regulator, standard tip, 16-oz. by wt., extra cylinder, spark lighter, 6 flints, 5 brazing rods, extra tip for detailed work. Plastic case included.

ORDER INFO: See "N" suffix, p. 82.
Shpg. wt. 8 lbs.*
9 HT 54334NKit \$34.99

16-pc. Kit. As (2), except

regular-action torch.
ORDER INFO: See "N" suffix, pg. 82. Wt. 8 lbs.*
9 HT 54332NKit \$29.99

Mapp® Gas Torch. Regulated.

16 oz. cylinder.
ORDER INFO: "N" suffix, p. 82. Wt. 3 lbs. 4 oz.
9 HT 54333\$17.99

Mapp® Gas Cylinder.

Holds 16 oz. by wt.
ORDER INFO: See "N" suffix, p. 82. Wt. 3 lbs.*
9 HT 54921N\$3.39

Case of 12 Mapp Gas Cylinders.

Each holds 16 ounces by weight.
ORDER INFO: See "N" suffix, pg. 82. Wt. 26 lbs.*
9 HT 54924NPkg. \$35.99

Spark Lighter. Protective cap.

Includes 1 flint.
ORDER INFO: Wt. 4 oz.
9 HT 5440\$5.99

Pipe Threading Tools

Vise, Cutter and Taps for cutting Tubing or Pipes

(3) **Pipe Vise.** Malleable iron frame. Steel jaw. Easy release, pipe support. For 1/8 to 1 1/2-in. outside diam. pipe.

ORDERING INFORMATION:
Shpg. wt. 3 lbs. 15 oz.
9 HT 55511\$16.99

(4) **CRAFTSMAN Chain-type Pipe Vise.** 8000-pound breaking strength. Ductile iron frame and jaws. Takes 1/8 to 3-inch outside diameter pipe.

ORDER INFO: See warranty, p. 94.
9 HT 5557—Wt. 5 lbs. 10 oz.\$21.99

(5) **CRAFTSMAN Pipe Cutter.** Cast-iron head, steel handle. Tool steel cutting wheel. Two rollers. No. 2 size, cuts 1/8 to 2-inch outside diameter pipe.

ORDER INFO: See warranty, p. 94.
9 HT 55072—Wt. 6 lbs.\$44.99

Replacement Cutting Wheel for (5).

9 HT 55033—Shpg. wt. 2 oz.\$2.49

(6) **Saunders-type Pipe Cutter.** Tool-steel cutting wheel, 2 steel rollers. SIZES, CAPACITIES. ORDER INFO:

No. 1 cuts 1/8 to 1 1/4-in. outside diam.
9 HT 55023—Wt. 2 lbs. 15 oz.\$15.99

No. 2 cuts 1/2 to 2-in. outside diameter.
9 HT 55024—Wt. 5 lbs. 7 oz.\$19.99

Replacement Cutting Wheels. No. 1 for 9HT55023, former 9-55021. No. 2 for 9HT55024, former 9-5507, 9-55022.

SIZES. ORDERING INFORMATION:
9 HT 55031—No. 1. Wt. 2 oz.\$2.99
9 HT 55032—No. 2. Wt. 2 oz.3.29

(7) **Taper-style Pipe Tap.** Kromedge® steel, chrome-plated. Self-threading.

SIZES. ORDERING INFORMATION:

Catalog No.	Size	Threads per in.	Wt.	Each
9 HT 54531	1/8-in.	27	3 oz.	\$1.29
9 HT 54532	1/4-in.	18	4 oz.	1.89
9 HT 54533	3/8-in.	18	5 oz.	2.49
9 HT 54534	1/2-in.	14	6 oz.	3.69
9 HT 54535	3/4-in.	14	10 oz.	5.79
9 HT 54536	1-in.	11 1/2	1 lb.	8.49



(8) **Heavy-duty Pipe Threader Stock.** Single-pawl, ratchet-action. Die shown is not included.

CONST.: Malleable iron head on steel handle stock.

SIZES. ORDER INFO:
See warranty on page 94.

Threader Stock for 2x2-in. Dies.
Shpg. wt. 4 lbs. 5 oz.

9 HT 54802\$24.99

Threader Stock for 2 1/2x2 1/2-in. Dies.

Shpg. wt. 4 lbs. 15 oz.
9 HT 54803\$26.99

Threader Stock for 4x4-in. Dies.

Shpg. wt. 7 lbs.
9 HT 54804C\$36.99

Metal Rack for 2x2-in. pipe threading equipment (not shown). Holds threader, 5 dies, 5 bushings (not incl.).

ORDER INFO: Wt. 2 lbs. 7 oz.
9 HT 54805\$3.99

Metal Rack for 2 1/2x2 1/2-in. pipe threading equipment (not shown). Holds threader, 4 dies, 4 bushings (not incl.).

ORDER INFO: Wt. 3 lbs. 7 oz.
9 HT 54806\$4.59

(9) **Thread Cutting Oil.** Helps increase life of tool.

SIZES AND ORDERING INFO:
1/2-pint. Wt. 12 oz.

9 HT 55211\$1.99

1-quart. Wt. 2 lbs. 6 oz.

9 HT 55212\$3.49

†NOTE: Bushing may differ from item shown depending on pipe diam. ordered.

(10) **Solid 2x2-in. Pipe Dies.** Chip-ejecting and self-feeding.

SIZES. ORDER INFO:
See warranty, pg. 94.
Wt. 10 oz. Each \$11.29

Catalog No. For pipe diam.

9 HT 551011/4-inch

9 HT 551021/2-inch

9 HT 551033/4-inch

9 HT 551041-inch

9 HT 551051 1/4-inch

(10) **Solid 2 1/2x2 1/2-in. Pipe Dies.** Chip-ejecting and self-feeding.

SIZES. ORDER INFO:
See warranty, pg. 94.
Wt. 14 oz. Each \$11.49

Catalog No. For pipe diam.

9 HT 547011/4-inch

9 HT 547021/2-inch

9 HT 547033/4-inch

9 HT 547041-inch

9 HT 547051 1/4-inch

9 HT 547061 1/2-inch

CRAFTSMAN® Regular-action Pipe Threader Set

(14) **CRAFTSMAN Solid 2-Die Pipe Threader Set.** 2x2-in. dies. Self-feeding, inserted tool steel cutters. Solid guide bushings. Cuts threads on pipes with 1/2 and 3/4-in. outside diam.

Sizes provide tight joints. Includes 1/2-pint of thread cutting oil.

ORDERING INFORMATION:
See warranty, pg. 94.

Shpg. wt. 5 lbs. 14 oz.
9 HT 5524Set \$40.99

(15) **Guide Bushings.** For use with pipe threader (14) left with solid 2x2-in. dies only.

ORDERING INFO: See warranty, pg. 94.
Shipping weight 8 ounces.

Catalog No. For Pipe diam. Each

9 HT 54631/4-inch\$2.59

9 HT 546311/2-inch2.59

9 HT 546323/4-inch2.59

9 HT 546331-inch2.59

9 HT 546341 1/4-inch2.59

(11) **Guide Bushings†.** Use with 2 1/2x2 1/2-in. solid dies.

SIZES. ORDER INFO:
See warranty, pg. 94.
Wt. 9 oz. Each \$3.39

Catalog No. For pipe diam.

9 HT 54651/4-inch

9 HT 546511/2-inch

9 HT 546523/4-inch

9 HT 546531-inch

9 HT 546541 1/4-inch

9 HT 546551 1/2-inch

(12) **Guide Bushings†.** Use with 4x4-in. solid dies only.

SIZES. ORDER INFO:
See warranty, pg. 94.
Wt. 12 oz. Each \$4.49

Catalog No. For pipe diam.

9 HT 54661/4-inch

9 HT 546611/2-inch

9 HT 546623/4-inch

9 HT 546631-inch

9 HT 546641 1/4-inch

9 HT 546651 1/2-inch

(13) **Guide Bushings†.** Use with 2x2-in. solid dies only.

SIZES. ORDER INFO:
See warranty, pg. 94.
Wt. 8 oz. Each \$2.89

Catalog No. For pipe diam.

9 HT 54641/4-inch

9 HT 546411/2-inch

9 HT 546423/4-inch

9 HT 546431-inch

9 HT 546441 1/4-inch

9 HT 546451 1/2-inch

9 HT 546461 3/4-inch

9 HT 546472-inch

9 HT 546482 1/4-inch

9 HT 546492 1/2-inch

9 HT 546502 3/4-inch

9 HT 546513-inch

9 HT 546523 1/2-inch

9 HT 546534-inch

9 HT 546544 1/2-inch

9 HT 546555-inch

9 HT 546565 1/2-inch

9 HT 546576-inch

9 HT 546586 1/2-inch

9 HT 546597-inch

9 HT 546607 1/2-inch

9 HT 546618-inch

9 HT 546628 1/2-inch

9 HT 546639-inch

9 HT 546649 1/2-inch

9 HT 5466510-inch

9 HT 5466610 1/2-inch

9 HT 5466711-inch

9 HT 5466811 1/2-inch

9 HT 5466912-inch

9 HT 5467012 1/2-inch

9 HT 5467113-inch

9 HT 5467213 1/2-inch

9 HT 5467314-inch

9 HT 5467414 1/2-inch

9 HT 5467515-inch

9 HT 5467615 1/2-inch

9 HT 5467716-inch

9 HT 5467816 1/2-inch

9 HT 5467917-inch

9 HT 5468017 1/2-inch

9 HT 5468118-inch

9 HT 5468218 1/2-inch

9 HT 5468319-inch

9 HT 5468419 1/2-inch

9 HT 5468520-inch

9 HT 5468620 1/2-inch

9 HT 5468721-inch

9 HT 5468821 1/2-inch

9 HT 5468922-inch

9 HT 5469022 1/2-inch

9 HT 5469123-inch

9 HT 5469223 1/2-inch

9 HT 5469324-inch

9 HT 5469424 1/2-inch

9 HT 5469525-inch

9 HT 5469625 1/2-inch

9 HT 5469726-inch

9 HT 5469826 1/2-inch

9 HT 5469927-inch

9 HT 5470027 1/2-inch

9 HT 5470128-inch

9 HT 5470228 1/2-inch

9 HT 5470329-inch

9 HT 5470429 1/2-inch

9 HT 5470530-inch

9 HT 5470630 1/2-inch

9 HT 5470731-inch

9 HT 5470831 1/2-inch

9 HT 5470932-inch

9 HT 5471032 1/2-inch

9 HT 5471133-inch

9 HT 5471233 1/2-inch

9 HT 5471334-inch

9 HT 5471434 1/2-inch

9 HT 5471535-inch

9 HT 5471635 1/2-inch

9 HT 5471736-inch

9 HT 5471836 1/2-inch

9 HT 5471937-inch

9 HT 5472037 1/2-inch

9 HT 5472138-inch

9 HT 5472238

Our most accurate Miter Boxes are both accuracy-tested to within .005 of an inch on 6-inch cuts

- Kromedge® saw blades of chrome-plated alloy steel give long-lasting sharpness
- Hangers hold saw out of the way so your hands are free to position workpiece
- Clamps with exclusive design hold workpiece snug against the back



\$79⁹⁹

Our most popular Miter Box has a 26x4-inch Kromedge® saw

Miter Box with 26x4-in. Kromedge® saw

CUT RANGE: Maximum depth 4 inches. Takes pieces to 8¾ inches wide at 90°, 6 inches wide at 45°. Cuts any angle 45° left or right.

SAW: 26x4-in. Kromedge® alloy-steel blade. Hollow-ground teeth, 11 points per inch for fine cuts. Hardwood handle.

SAW GUIDES: 11½ in. apart, 8 steel rollers for smooth, accurate cuts. Adjust to any saw thickness. Factory pre-tested. Two ½-in. diameter guide rods. Hanger holds saw, for 2-hand positioning of work. Turn two levers to release saw.

BASE: Rugged 1-piece base, back of aluminum alloy, 18 inches long. Depth stop helps protect saw teeth. Exclusive clamp attaches on either side of back, foot fits various wood shapes to secure workpiece against back. Off-set steel legs and mounting holes. Overall size: 18x10¼x14¼ inches high.

ORDERING INFORMATION:

9 HT 36303C—Shipping weight 17 pounds **\$79.99**



\$109⁹⁵

Our finest has a 28x5-inch Kromedge® saw

- Tap-cap saw release . . . you just need to tap the caps to release the saw quickly
- Easy take-down guide rods . . . they slip back in and hold their accuracy

CUTTING RANGE: Maximum depth 5 in. Takes pieces to 8¾ in. wide at 90°, 6 in. wide at 45°. Cuts any angle 45° left or right.


SAW: 28x5-in. Kromedge® alloy-steel blade. Hollow-ground teeth, 11 points per inch for fine cuts. Hardwood handle.

SAW GUIDES: 11½ in. apart with 10 steel rollers. Adjust to any saw thickness. Factory pre-tested for accuracy. Two ¾-in. half-round rods support guides . . . loosen screws to remove. Hanger holds saw, allows 2-hand positioning of work. Tap caps release saw.

BASE: Rugged 1-piece base, aluminum alloy back, 18 in. long. Depth stop protects teeth. Our exclusive clamp attaches on left or right side of back . . . foot fits various wood shapes to secure workpiece against back. Offset cast aluminum legs, mounting holes . . . legs widely spaced for stability. Overall: 18x12¾x17¼-in. high.

ORDERING INFORMATION:

9 HT 36505C—Shipping weight 27 pounds **\$109.95**

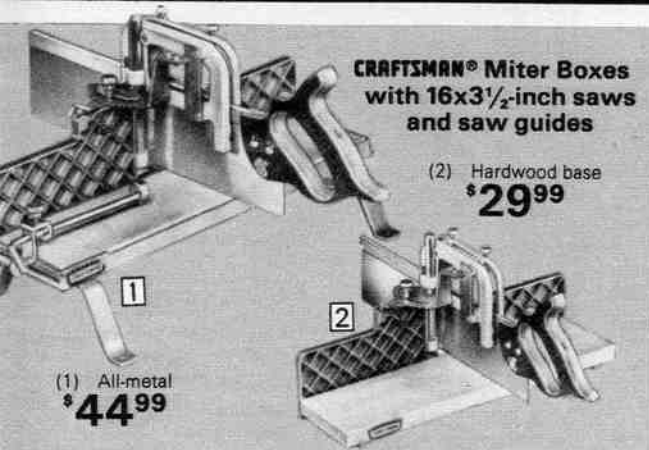

CRAFTSMAN® Miter Boxes with 16x3½-inch saws and saw guides

(2) Hardwood base
\$29⁹⁹

(1) All-metal
\$44⁹⁹

(1) All-metal . . . with workpiece clamp

CUTTING RANGE: 3½ inches deep, 3½ inches wide; any angle 45° left or right.

SAW: 16x3½-in. Kromedge® alloy steel blade. Hollow-ground teeth, 11 points per inch. Hardwood handle.

SAW GUIDE: Adjusts to any saw thickness for accurate cuts.

BASE: Cast-aluminum alloy back and base. Replaceable cutting board. Widely spaced legs for stability. . . with mounting holes. 19x9¼x11 inches high. Adjustable-length gauge to clamp wood securely to back.

ORDERING INFORMATION:

9 HT 36322—Wt. 10 lbs. . **\$44.99**

(2) With hardwood base, metal back

CUTTING RANGE: 3½ inches deep, 4½ inches wide; any angle 45° left or right.

SAW: 16x3½-in. Kromedge® alloy steel blade. Hollow-ground teeth, 11 points per inch. Hardwood handle.

GUIDE: For any saw thickness.

BASE: Cast-aluminum alloy back, hardwood base. Overall: 17¾x7x8½ in. high.

ORDERING INFORMATION:


Shipping weight 7 lbs. 2 oz.

9 HT 36329 **\$29.99**

Miter Box (2) without saw.

Shpg. wt. 5 lbs. 5 oz.

9 HT 3632 **\$22.50**

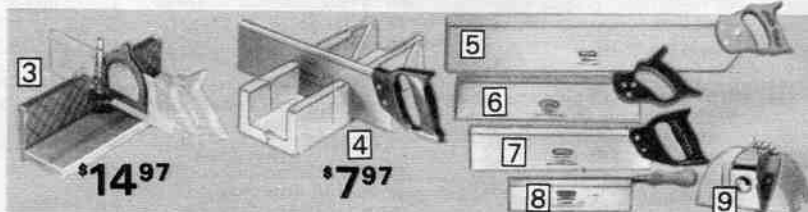

(3) CRAFTSMAN Miter Box with hardwood base and saw guide

CUTTING RANGE: 3 inches deep, 4½ inches wide; any angle 45° left or right.

SAW GUIDE: Adjusts to any saw thickness.

BASE: Cast aluminum alloy back, hardwood base. Overall: 17¾x8x7½ inches high.

ORDERING INFORMATION: Saw is not included.

Shpg. wt. 5 lbs. 5 oz.

9 HT 3634 **\$14.97**

(4) Polystyrene Miter Box with 14x3-inch saw

CUTTING RANGE: 3 in. deep, 2½ in. wide. For cuts 90°, 45° left or right, 45° diagonal.

SAW: 14x3-in. steel blade, 11 points per in. Plastic handle.

BASE: High-impact molded polystyrene resists warping. Overall: 14x5x3¾ in. high.

ORDERING INFORMATION:

Shipping weight 2 lbs. 5 oz.

9 HT 36328 **\$7.97**

(5) CRAFTSMAN 28-inch Back or Miter Saw

BLADE: 28x5-inch Kromedge® alloy steel, bevel-fitted, hollow ground teeth. 11 points per inch. Includes blade guard.

HANDLE: Hardwood.

ORDERING INFO:

Shpg. wt. 5 lbs. 7 oz.

9 HT 36185 **\$19.97**

CRAFTSMAN 26-in. Back or Miter Saw

(Not shown). As above, except 26x4-inch blade.

ORDERING INFO:

Shpg. wt. 4 lbs. 5 oz.

9 HT 36184 **\$17.97**

(6) CRAFTSMAN Back or Miter Saw

BLADE: 16x3½-inch Kromedge® alloy steel, hollow-ground teeth, 11 pts. per in. Braced back.

HANDLE: Hardwood.

ORDERING INFO:

Shpg. wt. 1 lb. 13 oz.

9 HT 36183 **\$9.97**

(7) Back Saw

BLADE: 14x3-in. steel, 11 pts. per in. Braced back.

HANDLE: Plastic.

ORDERING INFO: Not Craftsman. Wt. 1 lb. 13 oz.

9 HT 36182 **\$2.97**

(8) CRAFTSMAN Hobby Saw

BLADE: 10 in. long. Kromedge® alloy steel, 12 points per in. Braced back.

HANDLE: Hardwood.

ORDERING INFO: Wt. 12 oz.

9 HT 36181 **\$3.97**

(9) X-Acto® Mat Cutter


Cuts mats at 45° bevels, 90° angles. Also cuts balsa wood and plastic. Use for scoring and stripping. . . pull or push cuts. Adjustable depth of cut. Plastic body with positive blade lock holds blade securely.

Includes 19 blades.

ORDERING INFO:

Shpg. wt. 13 oz.

9 HT 52641 **\$8.89**

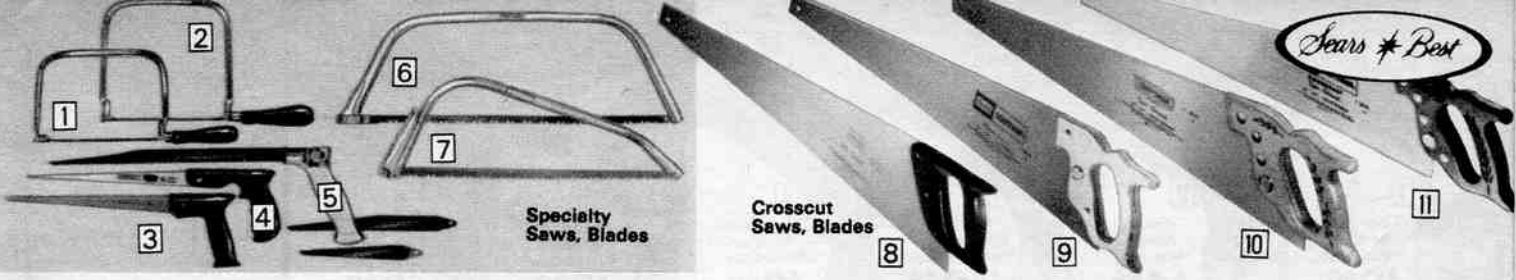

(1) **Coping Saw**
Cadmium-plated steel head with 5-inch throat depth. Includes 6½-inch blade with 15 teeth per inch. Takes blades at right. Hardwood handle.
ORDERING INFO:
Shpg. wt. 8 oz.
9 HT 35363\$1.69

(2) **CRAFTSMAN Coping Saw**
6¼-inch throat depth. Includes steel 6½-inch pin-end blade with 15 teeth per inch. Uses pin-end blades at right or lock loop-end blades. Hardwood handle.
ORDERING INFO:
Shpg. wt. 12 oz.
9 HT 35411\$2.79

Pin-end Coping Saw
Blades. Steel. 6½ in. long.
CUT. ORDERING INFO:
Pkg. of 3. Wt. 2 oz.
With 15 teeth per in.
9 HT 3544Pkg. 69c
With one each 10, 15, 20 teeth per inch.
9 HT 3543Pkg. 69c

(3) **Keyhole Saw.** Tempered steel blade 10 in. long. 10 teeth per in. Plastic handle.
ORDER INFO: Wt. 6 oz.
9 HT 35195\$1.79

(4) **CRAFTSMAN Keyhole Saw.** Kromedge® steel blade 10 inches long. 10 teeth per inch. Plastic handle with patented slot lock.
ORDERING INFORMATION:
Shpg. wt. 8 oz.
9 HT 35191\$2.99

(5) **CRAFTSMAN Nest of Saws**
With 3 tempered steel blades: 12-in. wood-cutting, 7 teeth per in.; 6-in. multi-purpose, 10 teeth per in.; 8½-in. metal-cutting, 24 teeth per in. Die-cast alum. handle, adjustable lock.
ORDERING INFO: Wt. 14 oz.
9 HT 3513Set \$5.99

(6) **CRAFTSMAN Bow Saw**
Steel blade 30 in. long. Tubular steel frame.
ORDERING INFO: Wt. 3 lbs.
9 HT 49232C\$5.99
Extra Blade for (6), Norway.
9 HT 48931—Wt. 6 oz.\$2.59

(7) **CRAFTSMAN Pruning Saw**
Steel blade 24 in. long. Tubular steel frame with tension lever. From Norway.
ORDER INFORMATION:
Shpg. wt. 1 lb. 6 oz.
9 HT 4904\$4.99
Extra Blade for (7), Norway.
9 HT 4905—Wt. 4 oz.\$2.49

(8) **Straight-back Saw.** Precision ground, heat treated, tempered and hardened tool steel blade, 26 in. long. 8 points per inch for coarse cuts. Plastic handle.
ORDERING INFORMATION:
Shpg. wt. 2 lbs.
9 HT 36123C\$2.99

CRAFTSMAN Flat-ground Straight-filed Saw (not shown). Tempered carbon-steel blade 26 in. long. For coarse cuts, 8 points per inch. With vinyl blade guard. Blow-molded handle.
ORDERING INFORMATION:
Shpg. wt. 2 lbs.
9 HT 36136C\$4.99

(9) **CRAFTSMAN Flat-ground Bevel-filed Saw.** Hardened, tempered, Kromedge carbon-steel blade. Vinyl blade guard. Hardwood handle.
CUT. ORDERING INFORMATION:
Shpg. wt. 2 lbs.
8 points per inch, 26 in. long.
9 HT 36144C\$8.99
10 points per inch, 26 in. long.
9 HT 36145C\$8.99
12 points per inch, 22 in. long.
9 HT 36141L\$7.99

(10) **CRAFTSMAN Taper-ground Bevel-filed Saw.** Chrome-nickel alloy steel blade with Kromedge® finish, vinyl guard. Hardwood handle.
CUT. ORDER INFO: Wt. 2 lbs.
8 points per inch.
9 HT 36153C\$11.95
10 points per inch.
9 HT 36154C11.95

(11) **CRAFTSMAN Taper-ground Bevel-filed Saw.** Sears Best. Chrome-nickel-moly alloy steel blade with Kromedge® finish for rust-resistance, helps retain keen cutting edge. Taper-ground blades reduce friction, binding. Bevel-filed teeth for fast, clean cuts. Vinyl blade guard. Hardwood handle, walnut-stained and lacquer-finished.
ORDER INFO: See warranty, page 94.

For coarse cuts, 8 points per inch.
Shpg. wt. 2 lbs.
9 HT 36193C\$14.95
For fine cuts, 10 points per inch.
Shpg. wt. 2 lbs.
9 HT 36194C\$14.95



Letter Stamping Set

(12) **Letter Sets.** Steel. Marks permanently on leather, plastic, wood, metal for identification or design purposes. A to Z, period. Wooden box included.
SIZES. ORDERING INFO:
¼-inch. Wt. 1 lb. 12 oz.
9 HT 37924Set \$14.99
¾-inch. Wt. 2 lbs. 11 oz.
9 HT 37925Set \$16.99



Number Stamping Sets

(13) **Number Sets.** Made of steel. Marks permanently on leather, plastic, wood, metal. Numbers 0 thru 8. Number 6 inverts to 9. No period. Wooden box included.
SIZES. ORDERING INFO:
¼-in.
Shpg. wt. 15 oz.
9 HT 37912Set \$5.99
¾-in.
Shpg. wt. 1 lb. 5 oz.
9 HT 37913Set \$6.99



Wrecking Bars, Nail and Tack Pullers

(14) **Tack Puller.** Steel construction with a vinyl grip.
ORDERING INFORMATION:
9 HT 3810—Shpg. wt. 4 oz.79c

(15) **CRAFTSMAN 12-in. Nail Puller.** Steel jaw construction.
ORDERING INFORMATION:
9 HT 6595—Wt. 1 lb. 7 oz.\$3.89

(16) **18-inch Nail Puller.** Steel jaw construction.
ORDERING INFORMATION:
9 HT 6593—Wt. 5 lbs. 6 oz.\$10.39

(17) **CRAFTSMAN Pull-n-Pry Bars**
Made of tempered steel.
SIZES. ORDERING INFORMATION:
2x15 inches long.
9 HT 6591—Wt. 1 lb. 12 oz.\$5.20
¾x24 inches long.
9 HT 65941—Wt. 5 oz.1.19

(18) **CRAFTSMAN Rip Bar.** Steel. ¾x18 inches long.
ORDERING INFORMATION:
9 HT 6577—Wt. 2 lbs. 11 oz.\$5.39

(19) **CRAFTSMAN Wrecking Bars**
SIZES. ORDERING INFORMATION:
¾x24 inches long. Steel.
9 HT 6597C—Wt. 4 lbs.\$5.49
¾x30 inches long. Steel.
9 HT 65981C—Wt. 5 lbs.5.99

Economy Wrecking Bars (not shown).
SIZES. ORDERING INFORMATION:
½x12 inches long. Steel.
9 HT 6596—Wt. 15 oz.89c
¾x24 inches long. Steel.
9 HT 6598C—Wt. 4 lbs.\$2.89



Sawhorse Legs and Brackets


(20) **Fully mechanical Sawhorse Legs.** Withstand a load of 1500 pounds.
CONSTRUCTION: Made of heavy-duty steel. Self-locking braces. Jaws will adjust to cross piece and hold it securely. No tools required to assemble. Enamel finish.
ORDERING INFORMATION:
9 HT 28884—Wt. 8 lbs.\$6.99

(21 and 22) **Sawhorse Legs and Brackets.**
Hinged steel. Enamel finish. Fits new 2x4's (1½x3½-inch, not included).

(21) **Heavy-duty Brackets.** No nailing. 6¼x3¾x7 inches long. Package of two.
ORDERING INFORMATION:
Shpg. wt. 5 lbs. 5 oz.
9 HT 28871Pkg. \$5.49

(22) **Medium-duty Brackets.** Flanged nail holes. 6¼x3¾x4 inches long. Pkg. of 2.
ORDERING INFORMATION:
Shpg. wt. 2 lbs. 5 oz.
9 HT 28872Pkg. \$2.99

Light-duty brackets. Similar to (22) Medium-duty Brackets sold above. With flanged nail holes. 4x3½x4 inches long. Package of two.
Shpg. wt. 1 lb. 13 oz.
9 HT 28873Pkg. \$1.99

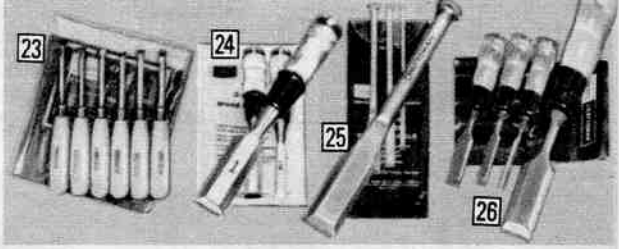

Precision-made Chisels

(23) **Craftsman 6-piece Carving Chisel Set.** Austempered, forged alloy steel blades. Precision-ground bevels, cutting edge. Hardwood handles. 6 chisels: straight blade, bent blade, bent gouge, skew bevel, "U" tool, veining tool. Plastic pouch. From Japan.
ORDERING INFORMATION:
Shipping weight 12 ounces.
9 HT 3685Set \$10.99

(24) **3-piece Chisel Set.** Drop-forged, heat-treated high carbon steel blades. Vinyl-covered plastic handles. Sizes: ¼, ¾, 1-inch wide. Plastic pouch. Japan.
ORDERING INFORMATION:
Shipping weight 1 pound.
9 HT 36891Set \$5.97

(25) **Craftsman 4-pc. Chisel Set.** Drop-forged high-carbon steel, hardened, tempered, nickel chrome-plated. With striking head. Sizes ¼, ½, ¾, 1-inch wide. Plastic pouch.
ORDERING INFORMATION:
Shpg. wt. 1 lb. 13 oz.
9 HT 36838Set \$11.61
Individual Chisels as (25)
ORDERING INFORMATION:
Save when you buy any two or more chisels below.

Catalog Number	Width in.	Wt. lbs. oz.	Each	2 or more, each
9 HT 36832	¼	4	\$2.77	\$2.63
9 HT 36833	½	6	2.97	2.82
9 HT 36834	¾	7	3.17	3.01
9 HT 36835	1	12	3.47	3.29
9 HT 36836	1½	15	3.87	3.67
9 HT 36837	2¾	2	4.97	4.72

*2¾-inch size is double-beveled

(26) **Craftsman 4-piece Chisel Set.** Precision-ground high-carbon steel blades, hammer-forged, heat-treated. Butyrate Tenite II handles. With striking cap. Sizes: ¼, ½, ¾, 1-inch wide. Plastic pouch.
ORDERING INFORMATION:
Shpg. wt. 1 lb. 9 oz. See Warranty, page 94.
Sep. prices total \$16.28.
9 HT 36826Set \$13.97
Individual Chisels as (26)

Catalog Number	Width in.	Shpg. wt. oz.	Each
9 HT 36821	¼	6	\$3.77
9 HT 36822	½	7	3.97
9 HT 36823	¾	7	4.17
9 HT 36824	1	8	4.37
9 HT 36825	1½	9	4.67



(27) **Craftsman Nail-setting Tool Set**
Four-piece set of heat-treated, tempered high-carbon tool steel. Square head with knurled body. Set includes sizes: ¼, ½, ¾, 1, 1½, 2, 2½, 3, 3½, 4, 4½, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100. Also includes plastic storage pouch.
ORDERING INFO:
Shpg. wt. 9 oz.
9 HT 37547Set \$3.49




(28) **Craftsman Combination Sharpening Stone**
Made of vitrified silicon carbide. One side coarse, the other side is fine.
SIZES. ORDERING INFO:
2x17 inches long.
Shipping weight 1 lb. 2 oz.
9 HT 64402\$2.49

(29) **Steel Stud Driver**
Fasten furring strips, drapery brackets, shelving, conduits to brick, concrete and cinder blocks. Set in concrete with 2-pound or larger hammer. Lip helps guard against hitting your hand. Vinyl-covered hardened steel construction. Use with steel drive studs (30) at right.
ORDERING INFORMATION:
Shpg. wt. 1 lb. 4 oz.
9 HT 3571\$4.49

(30) **Steel Drive Studs**
For use with Steel Stud Driver (29), shown at left. Austempered steel with washer.
ORDERING INFORMATION:
Shpg. wt. 4 oz. per pkg.

Catalog Number	Shank Length	Pkg. of	Price Pkg.
9 HT 35702	1 in.	12	\$1.29
9 HT 35704	1½ in.	10	1.29
9 HT 35705	2 in.	9	1.29
9 HT 35708	2½ in.	8	1.29
9 HT 35709	3 in.	7	1.29





Ball-pein Hammers

HEAD: Drop-forged heat-treated steel head for strength. Machined face and pein. Face crowned and beveled to help prevent chipping. Head epoxy-bonded to handle, held tight with steel wedge.

(1) **CRAFTSMAN Ball-pein Hammer with fiber glass handle**
HANDLE: Fiber glass . . . stronger than wood handles. Neoprene grip with chevron pattern.
SIZE AND ORDERING INFORMATION: See warranty below.

Catalog No.	Head	Shpg. wt.	Price
9 HT 38475	24 oz.	2 lbs. 6 oz.	\$8.90
9 HT 38476	32 oz.	2 lbs. 12 oz.	9.49

(2) **CRAFTSMAN Ball-pein Hammer with hickory handle**
HANDLE: Select hickory.
SIZE AND ORDERING INFO: See warranty below.

Catalog No.	Head	Shpg. wt.	Price
9 HT 38461	4 oz.	10 oz.	\$4.69
9 HT 38463	8 oz.	15 oz.	4.99
9 HT 38464	12 oz.	1 lb. 4 oz.	5.49
9 HT 38465	16 oz.	1 lb. 8 oz.	5.99
9 HT 38466	24 oz.	2 lbs. 3 oz.	6.49
9 HT 38467	32 oz.	2 lbs. 11 oz.	6.99

CRAFTSMAN® Nail Hammers with our finest head . . . 4 handle types

(3 thru 6) HEAD: Triple-tempered drop-forged steel head for strength and durability. Machined face. Beveled crown to reduce chipping. Steel ribs under each claw for extra strength. Third claw to pull nails from tight spots on 13-ounce and 16-ounce heads.

(3) **With fiber glass handle.** More shock-absorbent than steel. Locked in place with 3,000 pounds of hydraulic pressure. Parallel fiber glass stands for strength. Hollow core for balance. Neoprene grip resists oil and grease . . . with chevron perforations for firm grasp.
CLAW, SIZE AND ORDERING INFORMATION: See warranty below.

With curved claw, 16-oz. head.
Shipping weight 1 lb. 13 oz.
9 HT 38220 . . . \$10.49

With curved claw, 13-oz. head.
Shipping weight 1 lb. 9 oz.
9 HT 38222 . . . \$9.99

With straight claw, 16-oz. head.
Shipping weight 1 lb. 15 oz.
9 HT 38221 . . . \$10.49

With straight claw, 20-oz. head plus milled face. Resists slipping on impact so nail goes in straight. No third claw.
Shipping weight 2 lbs. 6 oz.
9 HT 38223 . . . \$11.99

(4) **With tubular steel handle.** Stronger than hickory, more shock-absorbent than solid steel. Hickory plug absorbs vibrations. Perforated neoprene grip resists oil, grease for firm, slip-resistant grasp.
CLAW: Curved.
SIZE: 16-ounce head.
ORDERING INFORMATION: See warranty below.
Shipping weight 1 lb. 13 oz.
9 HT 38336 . . . \$9.90

(5) **With solid steel handle.** Drop-forged, tempered for strength. Hickory plug helps cut vibrations. Perforated neoprene grip resists oil, . . . helps resist slipping. Grip bonded to 1-beam shaped handle.
CLAW, SIZE, ORDERING INFO: See warranty below.

With curved claw, 16-oz. head.
Shipping weight 1 lb. 12 oz.
9 HT 38325 . . . \$9.90

With straight claw, 20-oz. head. No third claw. Wt. 2 lbs. 6 oz.
9 HT 38273 . . . \$11.49

(6) **With select hickory handle**
Most shock-absorbent handle we sell. Reinforced at neck with steel shield (except 9 HT 38095) to protect handle on overstrikes.
CLAW, SIZE AND ORDERING INFORMATION: See warranty below.

With curved claw and 16-oz. head.
Shpg. wt. 1 lb. 11 oz.
9 HT 38141 . . . \$8.90

With straight claw and 16-oz. head.
Shpg. wt. 1 lb. 12 oz.
9 HT 3816 . . . \$8.90

With straight claw, 20-oz. head. Like hammers described above, except no shield, third claw or ribs under claw.
Shpg. wt. 2 lbs. 3 oz.
9 HT 38095 . . . \$9.49



Nail Hammers

(7) **With hickory handle**
HEAD: Drop-forged steel with curved claws. 16-oz.
HANDLE: Double steel-wedged hickory.
ORDERING INFORMATION: Shipping wt. 1 lb. 9 oz.

CRAFTSMAN: Beveled claws. See warranty below.
9 HT 3818 . . . \$6.79
Not Craftsman.
9 HT 38081 . . . 1.97

(8) **With steel handle**
HEAD: 16-oz. drop-forged steel. Curved claws.
HANDLE: Tubular steel with neoprene grip.
ORDERING INFO: Made in Japan. Wt. 1 lb. 14 oz.
9 HT 3812 . . . \$4.49

(9) **CRAFTSMAN Model Maker's Hammer**
HEAD: 5-oz. forged steel. Curved claws.
HANDLE: Hickory.
ORDERING INFORMATION: See warranty below.
9 HT 3813—Wt. 10 oz. \$5.99

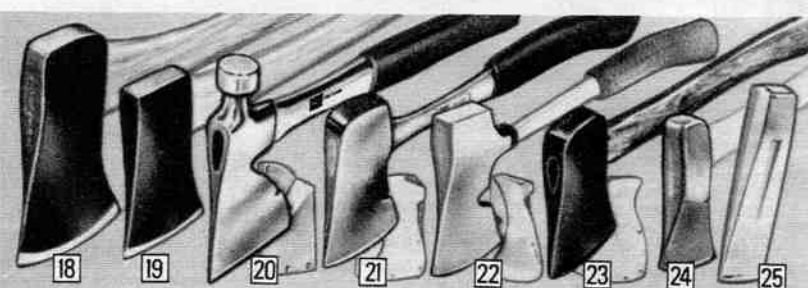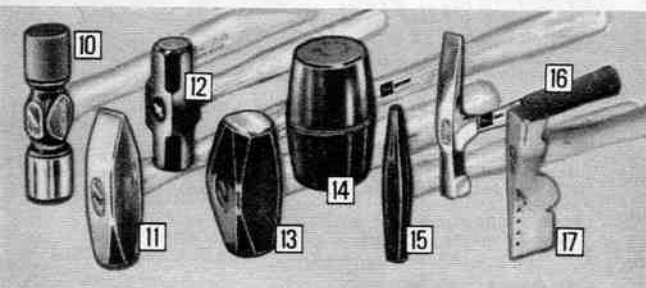

Hammers, Sledges and Mallet

(10) **CRAFTSMAN Plastic-tip Hammer**
HEAD: Forged steel core with 1 plastic tip, 1 vinyl tip to help prevent marring surfaces.
HANDLE: Hickory.
SIZE AND ORDERING INFORMATION: See warranty at right.

Catalog No.	Head	Shipping wt.	Each
9 HT 38291	6 oz.	11 oz.	\$5.49
9 HT 38292	12 oz.	1 lb. 5 oz.	6.49

(11) **CRAFTSMAN Heavy-duty Hammer**
HEAD: Drop-forged tempered steel.
HANDLE: Select hickory.
SIZE, ORDERING INFORMATION: See warranty at right.

Catalog No.	Head	Shipping wt.	Each
9 HT 38262	2 1/2 lbs.	3 lbs. 4 oz.	\$8.49
9 HT 38263	3 lbs.	3 lbs. 14 oz.	8.99

(12) **CRAFTSMAN Sledges**
HEAD: Double-faced . . . steel.
HANDLE: Select hickory.
SIZE, ORDERING INFORMATION: See warranty at right.
With 4-lb. head, 15-in. long handle. Drop-forged head.
9 HT 50751—Wt. 4 lbs. 10 oz. \$10.90
With 8-lb. head, 32-in. long handle. Drop-forged head.
9 HT 50752C—Wt. 10 lbs. . . \$15.90
With 10-lb. head, 34-in. long handle. Hand-forged head.
9 HT 50753C—Wt. 12 lbs. . . \$17.90

SAFETY NOTE: Wear safety goggles when using striking tools . . . see page 75.

(13) **CRAFTSMAN Hand-drilling Hammer**
HEAD: 3-lb. drop-forged steel.
HANDLE: Hickory . . . 10 in. long.
ORDERING INFORMATION: See Warranty at right.
Shipping weight 3 lbs. 11 oz.
9 HT 38311 . . . \$8.99

(14) **CRAFTSMAN Rubber Mallet**
HEAD: Non-marring rubber construction. Weighs 16 ounces.
HANDLE: Hickory.
ORDERING INFORMATION: See Warranty at right.
9 HT 4578—Wt. 1 lb. 8 oz. . . \$4.99

(15) **Tack Hammer**
HEAD: 5-oz. forged steel. One magnetized face holds tacks.
HANDLE: Straight-grained hickory.
ORDERING INFORMATION: 9 HT 3802—Wt. 10 oz. . . \$3.29

(16) **CRAFTSMAN Bricklayer's Hammer**
HEAD: 16-oz. forged steel.
HANDLE: Steel with neoprene grip . . . non-slipping and it resists oil and grease.
ORDERING INFORMATION: See Warranty at right.
9 HT 6544—Wt. 1 lb. 4 oz. . . \$9.99

(17) **CRAFTSMAN Shingle Hammer**
HEAD: Drop-forged steel.
HANDLE: Hickory. 12 1/4 in. long.
ORDERING INFORMATION: See warranty at right.
Shipping weight 1 lb. 12 oz.
9 HT 4828 . . . \$11.99

Axes, Hatchets, Maul, Wedge with precision-ground edges

(18) **Our finest CRAFTSMAN Axes**
HEAD: Tempered, hardened tool steel, wedge-locked firmly to handle. 3 1/2-lbs. With 4 1/2-in. cutting edge.
HANDLE: Hickory, 32 inches long. 650 lbs. striking force.
BIT, ORDERING INFO: See warranty at right.
Shipping weight 6 pounds.
Single bit
9 HT 50371C . . . \$10.99
Double bit (not shown)
9 HT 50411C . . . \$12.99

(19) **CRAFTSMAN Axe**
HEAD: Hardened, tempered steel. 2 1/4-lb. With 3 1/2-in. cutting edge.
HANDLE: 28 inches long. Hickory.
ORDER INFO: Warranty, right.
Shipping weight 4 lbs.
9 HT 5026C . . . \$9.99

(20) **Our finest CRAFTSMAN Half Hatchet**
HEAD: Forged axe-steel, heat-treated, polished and tempered to hold a keen edge. Freshrun hickory plug absorbs shock. Slot for pulling nails. 3 1/4-in. cutting edge. Includes protective leather blade sheath.
HANDLE: Chrome-plated 13-in. tubular steel. Slip-resistant neoprene grip.
ORDERING INFORMATION: See warranty at right. Shipping weight 1 lb. 14 oz.
9 HT 4812 . . . \$12.99

Half Hatchet (not shown). Not Craftsman.
HEAD: Heat-treated, hardened forged steel. 3 1/2-in. cutting edge. Double-steel wedge holds head firmly on handle. Slot for pulling nails. Black enamel finish. Protective leather sheath.
HANDLE: Measures 13 inches long. Hickory.
ORDERING INFORMATION: Shpg. wt. 2 lbs.
9 HT 4800 . . . \$7.49

(21) **CRAFTSMAN Camper's Axe**
HEAD: Polished solid steel head and neck. 2 1/4-inch cutting edge. Slot for pulling nails. Protective leather sheath open at top for driving nails, tent stakes.
HANDLE: Solid steel with slip-resistant neoprene grip. 13 inches long.
ORDERING INFORMATION: See warranty at right.
Shipping weight 2 pounds.
9 HT 4810 . . . \$12.49

(22) **Camper's Axe**
Not Craftsman. From Japan.
HEAD: High-carbon steel head drop-forged and polished. With 2 1/4-in. cutting edge and slot for pulling nails. Vinyl belt sheath.
HANDLE: 13-inch long tubular steel with neoprene grip.
ORDERING INFORMATION: Shpg. wt. 1 lb. 14 oz.
9 HT 4815 . . . \$6.49


(23) **Pack Axe**
Not Craftsman.
HEAD: Forged, heat-treated steel with lacquer finish to resist rust. 1 1/4-lb. with 3 1/4-in. cutting edge. With open-top leather sheath.
HANDLE: Measures 14 inches long. Hickory.
ORDERING INFORMATION: Shipping weight 2 lbs.
9 HT 4811 . . . \$8.49

(24) **Woodchopper's Maul**
For splitting wood.
HEAD: Made of high-carbon steel with polished edge. 6-pound head and 3 1/4-in. cutting edge.
HANDLE: Measures 36 inches long. Hickory.
ORDERING INFORMATION: See warranty below.
Shipping weight 8 lbs.
9 HT 50741C . . . \$14.99

(25) **Splitting Wedge**
Use for splitting wood.
HEAD: Hand-forged carbon steel. 5 lbs. 9 in. long.
ORDERING INFORMATION: See warranty below.
Shpg. wt. 5 lbs. 2 oz.
9 HT 5074 . . . \$6.40

FULL UNLIMITED WARRANTY FOR CRAFTSMAN HAND TOOLS
If these Craftsman Hand Tools fail to give complete satisfaction, return them to any Sears store throughout United States for a free replacement.

Gluing Clamps

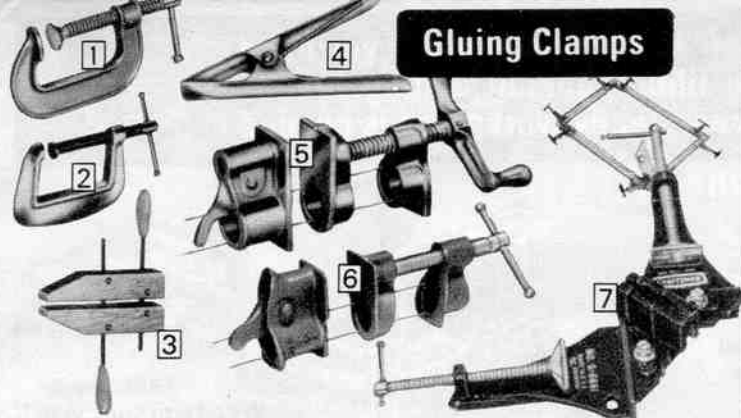

(1) **CRAFTSMAN® Standard Mal-leable-iron "C" Clamp.** Plated steel screw; sliding handle. For gluing, sawing, welding.

CAPACITIES, ORDERING INFO:

Catalog Number	Opens to	Throat depth	Wt. lbs. oz.	Each
9 HT 66671	1 in.	1 in.	4	99c
9 HT 66672	2 in.	1 1/2 in.	7	\$1.39
9 HT 66673	3 in.	1 3/4 in.	15	2.59
9 HT 66674	4 in.	2 in.	2	4.29
9 HT 66675	5 in.	2 1/2 in.	2	5.29
9 HT 66676	6 in.	2 3/4 in.	2	6.49
9 HT 66678	8 in.	3 1/4 in.	4	8.49

(2) **CRAFTSMAN Deep-throat "C" Clamps.** Not shown. For large gluing jobs. Pearlite iron frame.

CAPACITIES, ORDERING INFO:

Catalog Number	Opens to	Throat depth	Wt. lbs. oz.	Each
9 HT 66681	1 in.	3 in.	8	\$1.69
9 HT 66682	2 1/2 in.	4 1/2 in.	1	7.39
9 HT 66684	4 in.	5 in.	2	12

(3) **CRAFTSMAN Alum. Alloy "C" Clamp.** Steel screw, sliding handle.

CAPACITIES, ORDERING INFO:

Catalog Number	Opens to	Throat depth	Wt. lbs. oz.	Each
9 HT 66701	1 in.	1 in.	3 oz.	\$1.19
9 HT 66702	2 in.	1 1/2 in.	5 oz.	1.49
9 HT 66703	3 in.	1 3/4 in.	10 oz.	2.49
9 HT 66704	4 in.	2 in.	1 lb.	3.89

(4) **CRAFTSMAN Adjustable Gluing Clamp.** Selected hardwood jaws.

Catalog Number	Opens to	Wt. lbs. oz.	Each
9 HT 66638	8 inches	3	15 \$8.49
9 HT 66639	10 inches	5	2 9.49



(8) **Tite-bond®.** Twice as strong as our other white glues. Dries clear, sets quickly, spreads easily. Sandable. For woodworking.

Catalog Number	Size oz.	Shpg. wt. lbs. oz.	Each
9 HT 80617	8	1	1.47
9 HT 80618	16	1	2.47
9 HT 80621	32	2	4.37

(9) **Contact Cement.** Chlorinated, non-flammable. No clamping. For porous, non-porous goods.

Catalog Number	Size oz.	Shpg. wt. lbs. oz.	Each
9 HT 80656	16	1	8 \$2.67
9 HT 80657	32	2	13 4.37

(10) **Hide Glue.** For cabinet making, wood, fabric, leather or cardboard.

Catalog Number	Size oz.	Shipping weight	Each
9 HT 80622	4	9 ounces	\$1.07
9 HT 80623	8	14 ounces	1.99

(5) **CRAFTSMAN Spring Clamps.** Steel spring tension.

Catalog No.	Opens to	Length	Shpg. wt.	Each
9 HT 66691	1 in.	4 in.	4 oz.	99c
9 HT 66692	2 in.	6 in.	9 oz.	\$1.59
9 HT 66693	3 in.	9 in.	15 oz.	2.89

(6) **CRAFTSMAN Fits 3/4-in. pipe.** Jaw face 1 1/4 x 1 1/2 in. Spin-quick handle.

ORDER INFO: Wt. each set 3 lbs. 3 oz.
9 HT 6674 Set \$6.99
Two sets for 12.58

(7) **Fits 1/2-inch pipe.** Jaw face is 1 1/4 x 1 1/2 in. T-handle. From Japan. Not Craftsman.

ORDER INFO: Wt. each set 15 oz.
9 HT 6675 Set \$5.49
Two sets for 9.88

(8) **CRAFTSMAN Corner and Miter-box Clamp Set.** Holds piece up to 3 in. wide. Holes for fastening for work surface. Includes 3 corner clamps, 1 miter-box clamp. Aluminum alloy.


ORDER INFO: Wt. 2 lbs. 13 oz.
9 HT 66614 Set \$11.97

Corner Clamp. 3 needed with miter-box clamp below.

ORDERING INFORMATION:
9 HT 6666 Wt. 12 oz. \$2.99

Miter-box Clamp. Guides saw for precise 45° angle cutting. Fits any back or hand saw.

ORDERING INFORMATION:
9 HT 6661 Wt. 1 lb. 2 oz. \$3.99

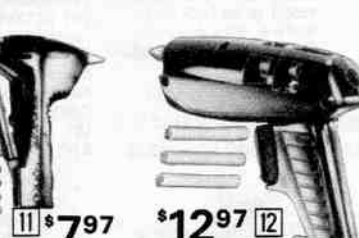

Glue and Glue Guns

(11) **CRAFTSMAN Medium-duty Glue Gun.** Pressure on nozzle controls flow. Heat-resistant plastic handle. Overall: 4 1/2 x 2 1/4 x 5 in. high. 6-ft. cord. 110-120-v., 60-Hz. AC. 160 watts, UL listed.

GLUE: Four 2 1/2-in. sticks for porous, nonporous materials. 3 sealer sticks for waterproof caulking. 90% bonding strength in 1 min.

ORDERING INFORMATION:
9 HT 80514 Shpg. wt. 1 lb. 4 oz. \$7.97

Extra Glue Sticks for (11). Box of 60.
9 HT 80517 Shpg. wt. 14 oz. Box \$3.67

(12) **Sears Heavy-duty Glue Gun.** With trigger control. Preset thermostat. Heat-resistant phenolic handle. 8 1/2 x 4 1/2 in. high. 6-foot cord. 110-120-v., 60-Hz. AC. 160 watts, UL listed.

GLUE: Three 4-in. sticks for porous, non-porous material. Bonds in 60 seconds.

ORDERING INFORMATION: Wt. 1 lb. 13 oz.
9 HT 80524 \$12.97

Extra Glue Sticks for (12).
9 HT 80525 Pkg. of 6. Wt. 5 oz. Pkg. \$1.47

Package of 40. Wt. 1 lb. 4 oz.
9 HT 80529 Pkg. 4.67

Soldering Irons, Accessories

(13) **Quick Charge Cordless Soldering Iron.** Recharges in under 5 hrs., partial charge in 2 hrs. Full heat in 5-8 seconds.

CONST.: 2 rechargeable batteries. Plastic housing. Pushbutton heat control . . . heats over 700°. Lock off switch. 8 inches long.

ACCESSORIES: 2 tips, recharging stand.

ELEC. INFO: 115-v., 60-Hz. AC. UL listed.

ORDERING INFO: See Warranty on pg. 123.
9 HT 53814 Shpg. wt. 1 lb. 7 oz. Kit \$24.89

Cordless Soldering Iron Kit. As above but recharges overnight. Incl. 1 tip, wall-mount bracket, charger. 8 inches long. 115-volt. UL listed.

ORDERING INFO: See Warranty on pg. 123.
9 HT 53802 Shpg. wt. 1 lb. 4 oz. Kit \$19.99

Replacement Tips for soldering irons above.
9 HT 53805 Regular. Shpg. wt. 3 oz. Each \$2.99
9 HT 53808 Fine. Shpg. wt. 3 oz. Each 2.99

(14) **CRAFTSMAN 27-w. Soldering Iron Kit** CONST.: Polymer handle. Heats over 700°.

ACCESSORIES: Stand, 1/8-in. chisel, 1/16-in. pyramid tip, solder.

ELEC. INFO: UL listed. 110-120-v., 60-Hz. AC. 4 1/2-foot cord.

ORDER INFO: 8-in. long. See Warranty, pg. 123.
9 HT 54513 Shpg. wt. 8 oz. Kit \$7.99

CRAFTSMAN 42-w. Soldering Iron Kit. As above, but with stand, wire stripper, 3 tips (1/8-in. pencil, chisel, 1/16-in. pyramid).

ORDER INFO: See Warranty on pg. 123.
9 HT 53512 Shpg. wt. 8 oz. Kit \$9.49

Replacement Element. For 42-w. iron above.
9 HT 53518 Shpg. wt. 4 oz. \$4.29

Replacement Pyramid Tips. For (14), 9 HT 53512, shown above.

9 HT 53518 Pkg. of 2. Wt. 3 oz. Pkg. \$1.49

Replacement Chisel Tip. For (14) and 9 HT 53512, shown above.

9 HT 53517 Pkg. of 2. Shpg. wt. 3 oz. Pkg. \$1.49

(15) **CRAFTSMAN 200-watt Soldering Iron** CONST.: Hardwood handle. 5/8-in. tapered chisel style, plated copper tip heats to 900°. 15 in. long.

ELECTRICAL INFORMATION: UL listed. 110-120-v., 60-Hz. AC. 5-foot cord.

ORDERING INFO: See Warranty on page 123.
9 HT 53832 Wt. 2 lbs. 1 oz. \$14.99

Replacement Tip. For 200-watt iron above.

ORDERING INFORMATION:
9 HT 53835 Shpg. wt. 12 oz. \$3.49

(16) **Craftsman Soldering Gun Kit** CONST.: Dual-heat. Cylolac® plastic housing. Trigger control. Heats over 1100°. 11 inches long. 150-230 w.

ACCESSORIES: 4 tips, solder, case.

ORDERING INFORMATION: See Warranty pg. 123.
9 HT 52855 Kit. Wt. 5 lbs. 1 oz. Kit \$19.99
9 HT 52851 Gun alone. Wt. 3 lbs. 10 oz. 17.99

110-140-watt Soldering Gun

ORDERING INFO: See Warranty on page 123.
9 HT 52841 Shpg. wt. 3 lbs. 2 oz. \$11.99

Replacement Tips for dual-heat guns above

ORDERING INFO: Pkg. of 2. Wt. 3 oz.

9 HT 52836 General-duty Tips. Pkg. \$1.69
9 HT 52837 Heat-sealing Tips. Pkg. 1.69
9 HT 52838 Plastic-Cutting Tips. Pkg. 1.69
9 HT 52834 Electronic-work Tips. Pkg. 1.69

(17 and 18) **Solder for a variety of tasks . . . available in 5-lb. spools**

(17) **Wire Solder** Soldering compounds are made up of tin and lead. Generally, larger amounts of tin in a solder make for a stronger bond.

Acid and rosin-core solders have flux in core so they do not require paste.

ORDERING INFORMATION:

Catalog Number	Quantity	Diam. (in.)	Tin/lead Ratio	Wt. lbs. oz.	Each
9 HT 80531	1-lb. spool	1/16	40/60	1	4 \$5.49
9 HT 80541	1-lb. spool	1/8	50/50	1	4 6.49
9 HT 80756	5-lb. spool	1/8	40/60	5	2 24.70

Solid Wire Solder. For non-electrical work.


9 HT 80562	5-ft. coil	1/16	30/70	3	69c
9 HT 80791	10-ft. coil	1/16	40/60	4	1.39
9 HT 8051	1-lb. spool	1/8	40/60	1	3 5.49
9 HT 80755	5-lb. spool	1/8	40/60	5	2 24.70

Acid Core Solder. For non-electrical work.

9 HT 80552	5-ft. coil	1/16	30/70	3	69c
9 HT 80781	10-ft. coil	1/16	40/60	4	1.39
9 HT 8052	1-lb. spool	1/8	40/60	1	3 5.49
9 HT 8089	10-ft. coil	1/16	60/40	3	1.39
9 HT 80757	1-lb. spool	1/8	60/40	1	2 7.49
9 HT 80753	5-lb. spool	1/8	60/40	5	2 33.70

Rosin Core Solder. For electrical work.

9 HT 80552	5-ft. coil	1/16	30/70	3	69c
9 HT 80781	10-ft. coil	1/16	40/60	4	1.39
9 HT 8052	1-lb. spool	1/8	40/60	1	3 5.49
9 HT 8089	10-ft. coil	1/16	60/40	3	1.39
9 HT 80757	1-lb. spool	1/8	60/40	1	2 7.49
9 HT 80753	5-lb. spool	1/8	60/40	5	2 33.70



(18) **Silver Solder and Flux.** For alloy steel. About 60 in. solder and .35-oz. tube of flux.

ORDERING INFO:

Shpg. wt. 4 oz.
9 HT 80993 \$2.99

Stainless Steel Solder and Flux. Non-electrical soldering. Lead-free; use for kitchen utensils.

About 100 in. solder and .35-oz. tube of flux.

ORDERING INFO:

Shpg. wt. 5 oz.
9 HT 80992 \$2.99

Aluminum Solder (not shown). About 100 in. of solder and .35-oz. tube of flux.

ORDERING INFO:

Shpg. wt. 5 oz.
9 HT 80994 \$1.59

Vises give you holding power for "hands free" control you need when drilling, sawing, planing, filing, sanding, cutting threads ... or any job where a steady workpiece is needed



CRAFTSMAN®
Cast gray-iron
heavy-duty
Bench Vise
with reinforced
stress points

\$2750 3½-in.
jaws

CONSTRUCTION: Body, Jaws: Cast gray-iron, reinforced at major stress points for durability ... red finish. Large anvil and anvil horn. Base swivels 165° locks in place with its own handle. Built-in pipe jaws. Jaw Faces: Screw-on, replaceable faces of hardened, tempered steel. Screw and Handle: Steel screw covered on top and sides by steel channel ... prevents filings from clogging screw threads. Zinc-plated steel handle with forged ball ends. From Japan.

CAPACITIES, ORDERING INFORMATION:

Catalog Number	Jaw size	Opens to	Holds pipe (diam.)	Shpg. wt.	Price
9 HT 5180C	3½ inches	4 inches	1½ to 1½ inches	19 lbs.	\$27.50
9 HT 5188C	4 inches	5 inches	1½ to 1½ inches	27 lbs.	44.50
9 HT 5181C	5 inches	6 inches	1½ to 1½ inches	40 lbs.	64.50




CRAFTSMAN®
Woodworking Vise
... slide jaw open and
closed, tighten with a twist
\$5990

CONSTRUCTION: Meets Federal Specifications GGG-V-445a for strength. Fits 2¼ inch thick bench with ½ inch top clearance. From Japan. Body, Jaws: Cast gray iron, red finish. Steel guide rods keep vise aligned, steel drag bar. Retractable dog acts as bench stop. 12 in. capacity. Jaw faces, 4x10 in. ... predrilled holes for attaching wood faces (not included). Screw and Handle: Steel screw. Continuous 180° thread screw. Quick action closing lets you slide vise closed, then tighten with a turn of the hardwood handle ... reverse action to open.

ORDERING INFORMATION:

9 HT 5195C—Shipping weight 39 pounds \$59.90

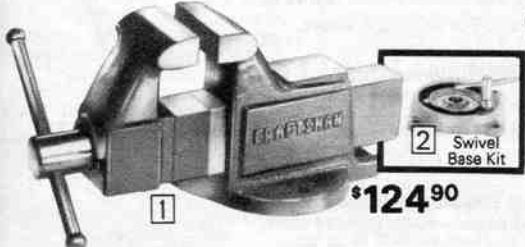

(1) CRAFTSMAN® Machinists' Vise
of ductile iron ... the strongest we sell
CONSTRUCTION: Meets Federal Specifications GGG-V-410A for strength. From Japan.

Body, Jaws: Ductile cast-iron, reinforced at major points of stress. Self-lubricating graphite bronze bearing absorbs thrust of screw head to reduce friction, cut wear. Jaws measure 4½ in., open to 7 in. Clamps with force to 3 tons. Machined nut, back jaw keyway. Jaw Faces: Hardened, tempered steel. Replaceable faces pinned to jaws ... no screws to mar work. Screw, Handle: Cold-rolled steel screw, covered by front jaw beam ... prevents clogging. Steel handle.

ORDERING INFORMATION:

9 HT 5197L—Shipping weight 53 pounds \$124.90

(2) Swivel Base Kit. (for 9 HT 5197L above). Allows vise to swivel 360°, locks in any position. Ductile cast-iron with center bolt, plug for 1 hole. From Japan.
ORDERING INFORMATION:

9 HT 5198—Shipping weight 8 lbs. 13 oz. Kit \$19.90



(3) Light-duty Vises
CONSTRUCTION: Japan. Body, Jaws: Cast-iron body reinforced at major stress points. Red finish. Anvil, anvil horn. Locking swivel turns 165°. Jaw Faces: Screw-on tempered steel. Screw, Handle: Steel handle. Screw, lock-nut nickel plated.


CAPACITIES, ORDER INFO: Not Craftsman.

3½-in. jaws. Open to 3 in. Shpg. wt. 11 lbs. 6 oz.

9 HT 5178 \$11.89

4-in. jaws. Open to 5 in. Shpg. wt. 17 lbs.

9 HT 5177C \$19.49

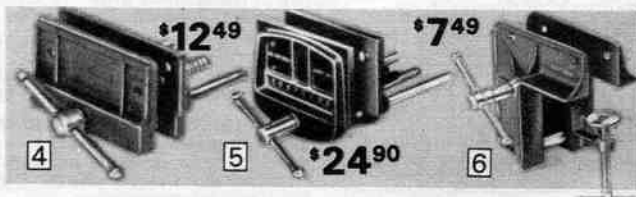

(4 thru 6) Woodworking Vises

(4) 4½-in. capacity

CONSTR.: Fits 2¼ in. thick with ½ in. top clearance. Japan.

Body, Jaws: Semi-steel jaws measure 2½x6½ inches. Red finish. Steel guide rods. 4½ in. cap. Pre-drilled holes in jaw faces for easy mounting of wood faces (not incl.). Screw and Handle: Steel screw. Ball ended steel handle.

ORDERING INFO:

Not Craftsman.

Wt. 6 lbs. 6 oz.

9 HT 5190C \$12.49

(5) CRAFTSMAN®

7-in. cap. Vise

CONST.: Fit 2¼ in. thick bench with ½ in. top clearance. Japan.

Body, Jaws: Cast gray iron, red finish. Steel guide rods keep alignment. 7-in. cap. jaws. Jaw faces 4x7 in. wide. Pre-drilled screw holes for attaching wood faces (not incl.). Screw and Handle: Steel screw. Ball-ended steel handle.

ORDERING INFO:

Wt. 12 lbs. 8 oz.

9 HT 5191 \$24.90

(6) CRAFTSMAN

Portable Vise with

2½-in. capacity

CONST.: Fits bench 7/8 to 2¼ in. thick.

Body, Jaws: Alum., gray finish. 2¼ in. cap. "L" shaped jaws useful for clamping doors upright to bench for planing. Jaws 5½x5½ in. Pre-drilled holes for fastening wood faces (not incl.). Screw, Handle: Steel screw and handle.

ORDERING INFO:

Wt. 2 lbs. 1 oz.

9 HT 5202 \$7.49

(7 and 8) Portable Vises
lock in different positions
for a handy working angle




(7) Ball-Swivel Vise locks in virtually any angle for hobby, detail work. Only 5½x4½x6¼ in. high.

CONSTRUCTION: Body, Jaws: Cast zinc body. Jaws, socket base have black enameled finish; natural-finish ball joint. 2½-in. capacity "V" groove jaws; incl. removable protective pads. Screws, Handle: Zinc screw, handle.

ORDERING INFO: Shpg. wt. 6 lbs.

9 HT 25146 \$19.49

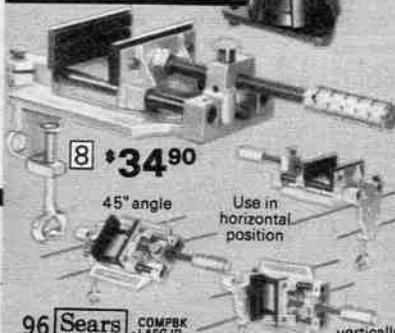

(8) 3-position Vise

CONSTRUCTION: Fits bench from 7/8 to 2½ inches thick.

Body and Jaws: Natural finish cast aluminum body. Steel guide rods. Jaws have 4 inch capacity. 1½x4 inches wide. Replaceable jaw faces. Change vise to 45° or 90° angle for workbench or drill press use. Screw, Handle: Steel screw with quick acting release for closing jaws. Knurled handle in horizontal position lets you get firm grip for tightening.

ORDERING INFO: Wt. 5 lbs.

9 HT 5179 \$34.90



(9) Clamp Vise. Sets up where needed. **CONSTRUCTION:** Fits benches up to 2½ in. thick. Red finish. From Japan.

Body, Jaws: Cast steel. Permanent pipe jaws, double guide bars for smooth action. Jaws 3-in. wide with 2½ in. capacity. Screw and Handle: Steel screw. Nickel-plated "T" handle.

ORDERING INFORMATION: Not Craftsman.

9 HT 5247—Wt. 4 lbs. 1 oz. \$6.90

(10) CRAFTSMAN® Vacuum-base Por-

table Vise. Set up where you need it.

CONST.: Cast aluminum. Gray finish. Body, Jaws: Apply slight pressure to top of vise and push lever down ... holds firmly to any surface. Lift lever to release. Cast steel jaws 2½ in. wide, V-groove. Open to 2 in. Slide-on rubber jaw protectors.

Screw and Handle: Steel screw, handle.

ORDERING INFORMATION:

9 HT 5174—Wt. 2 lbs. 12 oz. \$13.49

CRAFTSMAN® Anvil
Indispensable for shaping and forging.

CONSTRUCTION: Tempered steel. Anvil measures 10½x4½x4½ inches high.

ORDERING INFORMATION: Shpg. wt. 8 lbs. 10 oz.

9 HT 5173 \$15.99



1 thru 5 Flexible Steel Tapes

(1) **CRAFTSMAN Push-pull Tape**
CONSTRUCTION: Blade $\frac{1}{2}$ in. wide, 10 ft. long marked in $\frac{1}{16}$ in. Chrome plated zinc case with belt clip.
ORDERING INFORMATION:
9 HT 39167—Wt. 9 oz. \$2.99

Replacement Blades. Marked $\frac{1}{16}$ in.
ORDER INFO: Order old tape size.

Cat. No.	Wide in.	Long ft.	Wt. oz.	Price
9HT39192	$\frac{1}{2}$	8	4	\$1.39
9HT39193	$\frac{1}{2}$	10	4	1.69
9HT39194	$\frac{1}{2}$	12	4	1.99
9HT39195	$\frac{3}{4}$	10	5	2.49
9HT39196	$\frac{3}{4}$	12	6	2.69
9HT39197	$\frac{3}{4}$	16	6	3.19
9HT39198	$\frac{3}{4}$	20	7	3.79
9HT39199	$\frac{3}{4}$	25	8	4.39
9HT39124	1	12	6	2.99

(2) **CRAFTSMAN Slim Tape**
CONSTRUCTION: Flexible blade $\frac{1}{4}$ in. wide, 8 feet long. Chrome plated zinc case. Marked in $\frac{1}{16}$ inches.
ORDERING INFORMATION:
9 HT 39141—Wt. 4 oz. \$1.99

8-foot Extender Tape
CONSTR.: 8 ft. long, completely removable from case. 1-in. wide blade marked at $\frac{1}{16}$ in. Mylar* polyester coated blade. Plastic case.
ORDER INFO: Wt. 8 oz.
9 HT 39225—Wt. 8 oz. \$2.99

12-foot Belt Tape
CONSTR.: Belt clip, chrome-plated case. Locking button, 1-in. wide blade. Markings at ft., in., $\frac{1}{16}$ in. Stud markings. Replacement blade 9 HT 39124.
ORDER INFO: Wt. 11 oz.
9 HT 39123—Wt. 11 oz. \$7.99

(3) **Winding Reel Tape with chrome-plated zinc case**
CONSTRUCTION: Flexible $\frac{3}{8}$ in. wide steel blade. White enamel finish. Black markings every $\frac{1}{8}$ inch, stud markings every 16 inches. Adjustable end hook. Choose 50 or 100-ft. blades.
ORDERING INFORMATION:
9 HT 3908—50 foot. Wt. 1 lb. 3 oz. \$5.49
9 HT 39082—100 ft. Wt. 1 lb. 7 oz. 8.49

(4) **CRAFTSMAN Lock Tape**
CONSTRUCTION: Flexible, Mylar* polyester-coated blade. Press buttons to lock, return blade. Chrome-plated zinc case attaches to belt.
ORDERING INFORMATION:
Marked in inches, graduated to $\frac{1}{16}$ in.

Catalog No.	Wide	Long ft.	Shpg. wt.	Each
9 HT 39213	$\frac{3}{4}$ in.	10	11 oz.	\$5.79
9 HT 39214	$\frac{3}{4}$ in.	12	11 oz.	5.99
9 HT 39215	$\frac{3}{4}$ in.	16	14 oz.	7.49
9 HT 39217	$\frac{3}{4}$ in.	20	14 oz.	8.49
9 HT 39209	$\frac{3}{4}$ in.	25	13 oz.	9.99
9 HT 39222	$\frac{1}{2}$ in.	10	9 oz.	3.99
9 HT 39223	$\frac{1}{2}$ in.	12	9 oz.	4.49

As above, but blade marked in inches and millimeters, graduated to $\frac{1}{16}$ in. and 1 mm. 12 ft. long (3.65 meters).
9 HT 39224— $\frac{1}{2}$ -inch wide. Wt. 9 oz. \$4.49
9 HT 39218— $\frac{3}{4}$ -in. wide. Wt. 11 oz. 6.39

(5) **Winding Reel Tape, vinyl-covered case**
CONSTR.: Flexible $\frac{3}{8}$ in. wide steel blade. White enamel finish. Black markings every $\frac{1}{8}$ in. stud markings every 16 in. Chrome-plated reel and folding handle. Double roller mouthpiece. Hook-and-ring permits 1-man measuring.
ORDERING INFORMATION:
9 HT 39001—50-foot. Wt. 14 oz. \$9.99
9 HT 39002—100-ft. Wt. 1 lb. 7 oz. 12.99

Replacement Blades for (5) above.
ORDERING INFORMATION:
9 HT 39031—50-foot. Wt. 13 oz. \$4.99
9 HT 39032—100-ft. Wt. 1 lb. 5 oz. 6.99

Estimate distances quickly, automatically

Measures at 6 to 100 ft.

Handy Rolling Measuring Wheel

\$29.99

Optical Tapemeasures™ Measures at 6 to 600 ft.

(6 and 7) **Optical Tapemeasures™**. Pocket-sized measuring device. No tape to rewind... no need to trek over mud and snow. Makes measuring over water or uneven terrain easier. OPERATION: Works like a camera rangefinder. Sight any object through viewfinder, adjust knob to focus, read scale for distance. CONSTR.: Dust-free case of rugged, high-impact polypropylene. Precision-welded construction, shock-absorbing optical mounts. ACCESSORIES: Protective, padded carrying case. Instructions.

(6) **Measures 6 to 600 ft.**
Markings every foot at low end, every 10 to 20 ft. at high end. $8\frac{1}{2} \times 4 \times 1\frac{1}{2}$ inches thick. Weighs only 16 ounces.
ORDER INFO: Wt. 1 lb. 7 oz.
9 HT 3907—Wt. 1 lb. 7 oz. \$39.99

(7) **Measures 6 to 100 ft.**
Markings every inch at low end, every 10 ft. at high end. $5\frac{1}{2} \times 3\frac{1}{4} \times 1\frac{1}{8}$ in. thick. Weighs only 7 ounces.
ORDER INFO: Wt. 15 oz.
9 HT 3909—Wt. 15 oz. \$21.99

(8) **Rolling Measuring Wheel**
Estimate distances simply by walking. No need for a second person to hold the tape. Sealed counter records ft. and in. up to 1000 ft. Push button returns counter to zero. CONSTR.: High-impact polypropylene case. Aluminum handle extends from 20 to 39 inches. Wheel diameter 4 in. Neoprene tires.
ORDERING INFORMATION: Complete instructions included.
9 HT 39004—Shipping weight 3 pounds 2 ounces \$29.99

Levels with large, acrylic monovials for easy reading

(17 thru 21) You get pinpoint accuracy thru a full 360° rotation for both plumb and level readings. Levels feature barrel shaped monovials of tough acrylic, almost 20% larger than standard vials for easy reading.

(17) **Sears 24-inch Level**
MONOVIALS. FRAME: Aluminum with 3 vials; 2 plumb, 1 level.
ORDERING INFORMATION:
Shipping weight 1 pound 6 ounces.
9 HT 39955—Wt. 1 lb. 6 oz. \$5.99

(18 and 19) **CRAFTSMAN® Levels**. All but 78 inch have easy-to-read top window.
FRAME: Aluminum frame has closed ends for strength. MONOVIALS. ORDERING INFORMATION:

Catalog Number	Length inches	Vials			Shpg. wt. lbs. oz.	Price
		Plumb	Level	45°		
9 HT 39922	18	1	1	1	1 4	\$8.49
9 HT 39924	24	2	1	1	1 8	9.49
9 HT 39925C	28	2	1	1	2 4	10.49
9 HT 39926C	48	2	2	2	3	18.49
9 HT 39918L	78	3	2	2	6*	36.99

*If mailed, takes 15 pound rate, see Parcel Post in Big Book.

(20) **CRAFTSMAN 24-inch Level**. Sears Best level has 360° protractor vial that reads at any angle. MONOVIALS. FRAME: Lightweight aluminum with 1 plumb, 1 level monovial. Closed ends for strength. One magnetic edge.
ORDERING INFORMATION:
9 HT 39928—Shipping weight 1 lb. 11 oz. \$11.49

(21) **CRAFTSMAN 9-inch Torpedo Level**
Fits easily in tool box or pocket. MONOVIALS. FRAME: 3 vials; 1 level, 1 plumb and 1 45° Polycast frame has one magnetic edge.
ORDERING INFORMATION:
9 HT 39823—Shipping weight 7 ounces \$4.99

Torpedo Level, as above but not magnetic
ORDERING INFORMATION:
9 HT 39824—Shipping weight 7 ounces \$3.99

(22) **Magnetic Protractor Level**
CONSTRUCTION: MONOVIAL: Plastic. Measures $2\frac{1}{2} \times 2\frac{1}{2} \times \frac{3}{4}$ inches overall. One monovial. Reads plumb or level within $\frac{1}{2}$ °. Scale for pitch readings.
ORDERING INFORMATION:
9 HT 3990—Shipping weight 4 ounces \$2.99

Squares and Construction Tools

(9) **CRAFTSMAN Aluminum Rafter Square**
CONSTRUCTION: Our finest square. Made of hardened aluminum... won't rust or warp. Octagon and 100ths scale. Rafter and brace table. Precision graduations. Face marked in 8ths, 16ths; back marked in 10ths, 12ths. Black numbering. Measures 24x2 in. body and 16x1 $\frac{1}{2}$ in. tongue.
ORDERING INFORMATION:
9 HT 39644C—Shpg. wt. 2 lbs. \$11.99

CRAFTSMAN Steel Rafter Square
CONSTRUCTION: Same as above only steel, hard tempered and lacquer coated.
ORDERING INFORMATION:
9 HT 39641C—Shpg. wt. 3 lbs. \$7.49

Sears Steel Square (not shown).
CONSTRUCTION: Face marked in 8ths, 4ths; back in 4ths. Hard tempered steel, lacquer coated. Body 24x2 in.; tongue 16x1 $\frac{1}{2}$ in. Rolled graduations.
ORDERING INFORMATION:
9 HT 39642C—Shpg. wt. 3 lbs. \$4.49

Economy Steel Square (not shown).
CONSTRUCTION: Green markings in 8ths, both sides. Body 12x1 $\frac{1}{2}$ in.; tongue 8x1 in.
ORDERING INFORMATION:
9 HT 39643—Shpg. wt. 12 oz. \$1.59

(10) **Angle or Stair Gauge**. Use on rafter or framing squares for repeating angles.
CONSTRUCTION: Brass. Steel screw.
ORDERING INFORMATION: Package of 2.
9 HT 3956—Shpg. wt. 4 oz. Pkg. 89¢

(11) **CRAFTSMAN Try Square**
CONSTRUCTION: Eight-inch polished steel blade. Yellow markings top, bottom, both sides. Hardwood handle, brass trim.
ORDERING INFORMATION:
9 HT 39594—Shpg. wt. 10 oz. \$5.99

(12) **CRAFTSMAN Combination Square**
CONSTR.: Polished and oiled steel blade 12x1 in. Black markings: 8ths, 16ths on one side; 16ths, 32nds on other. Cast zinc 4 in. head has extra large level vial, removable scribe. Brass head tightener.
ORDERING INFORMATION:
9 HT 39543—Shpg. wt. 1 lb. 1 oz. \$6.99

(13) **CRAFTSMAN Sliding "T" Bevel**
Divides or transfers angles, checks edges. CONSTRUCTION: Adjustable 8 in. steel blade. Hardwood handle with brass trim.
ORDERING INFORMATION:
9 HT 39485—Shpg. wt. 7 oz. \$4.69

(14) **CRAFTSMAN 6-ft. Extension Folding Rule**. Outside reading.
CONSTRUCTION: Brass extension. Embedded marks in 16ths of an inch, both edges. Stud marks every 16 inches. Brass strike plates. Basswood finish. $\frac{3}{8}$ inch wide.
ORDERING INFORMATION:
9 HT 3931—Shpg. wt. 9 oz. \$4.99

(15) **CRAFTSMAN Automatic Protractor**
CONSTRUCTION: Sturdy plastic. Easy-to-read 4 inch diameter face reads within plus or minus $\frac{1}{2}$ °. Gives direct readings at any angle. Has smooth magnetic base, adheres easily to steel carpenter's square. Measures $4\frac{1}{2} \times 3\frac{1}{2} \times 5$ inches high.
ORDERING INFORMATION:
9 HT 3995—Shpg. wt. 10 oz. \$7.49

(16) **CRAFTSMAN Meter Stick**. Tables convert English Standard to metric.
CONSTRUCTION: Graduations in mm. and inches. Lightweight, flexible aluminum won't crack. Measures 39 $\frac{1}{2}$ in. (1 meter).
ORDERING INFORMATION:
9 HT 3762C—Shpg. wt. 1 lb. \$1.69

CRAFTSMAN® Electric Staple Gun Kit

Narrow stapler design allows easy access to tight areas... balanced lightweight construction eases operator fatigue in overhead tasks

\$42⁵⁰



Drives .050-wire staples 1/4 to 3/16-inch. Rapid-back-end loading.

CONSTR.: 8 3/4 in. long. Steel base. Handle, motor housing, hi-impact polycarbonate. Narrow design for operation in tight areas. Switch, safety lock.

ACCESSORIES: 5 packs of 1,000 staples (1/4, 3/16, 3/8, 1/2, 5/16-in.); staple remover, molded plastic carrying case.

ELECTRICAL INFO: 110-120-v., 60-Hz. AC. UL listed. 6-ft. 3 wire cord.

ORDER INFO: See Warranty on page 129. Order extra staples below.

9HT68422-Wt. 5 lbs. 14 oz. Kit \$42.50

Stapler alone.

9 HT 6842-Wt. 3 lbs. 4 oz. \$34.50

CRAFTSMAN® Staplers

\$15⁹⁹

(1) **Heavy-duty Stapler Kit.** Dual compression for extra driving power at push of a button. Drives 1/4 to 3/16-in., .050-wire staples into wood. CONSTRUCTION: Steel. Nickel-plated finish. Built-in staple extractor. Pull-back base, slides open for easy loading.

ACCESSORIES: 2 packs of 1,000 staples (3/8, 1/2-in.), belt hook, screen stretcher, desk adapter for stapler, molded plastic carrying case.

ORDERING INFO: See Warranty at right. Order extra staples below.

9 HT 68431-Wt. 3 lbs. 14 oz. Kit \$15.99

Stapler alone.

9 HT 6843-Shipping weight 2 lbs. \$12.99

\$11⁴⁹

(2) **Heavy-duty Pistol Grip Stapler.** Drives 1/4 to 3/16-in., .050-wire staples. Tacks screening, lightweight upholstery, insulation. CONSTRUCTION: Steel base. Nickel-plated finish. Built-in staple extractor. Pull-back base, slides open for easy loading.

ORDERING INFO: See Warranty at right. Order extra staples below.

9 HT 6846-Wt. 1 lb. 13 oz. \$11.49

Stapler Accessory Kit. Includes screen stretcher, belt hook, desk stapler adapter.

9 HT 68432-Shipping weight 7 oz. \$1.54

(3) **Extra Staples for Electric (9 HT 6842) and Manual Staplers (9 HT 6843 and 9 HT 6846) above.** Divergent point .050 high-carbon steel wire, 1/2-in. wide.

LENGTH, ORDERING INFORMATION:

Length in.	Cat. No. Pkg. 1000	Wt. oz.	Price Pkg.	Cat. No. Pkg. 5000	Wt. lbs. oz.	Price Pkg.
1/4	9HT68402	6	94c	9HT68652	1 5 94.19	
3/16	9HT68658	7	94c	9HT68653	1 9 4.19	
1/2	9HT68403	7	\$1.09	9HT68654	1 12 4.49	
3/8	9HT68404	9	1.29	9HT68656	2 2 5.29	
5/16	9HT68659	9	1.29	9HT68657	2 6 5.29	

\$5⁸⁸

(4) **Standard-duty Stapler.** Drives .030-wire staples into plastic or wood.

CONSTR.: Molded Lexan® plastic, black finish. Handle locks down for carrying. 6-in. long. Swingaway steel-plated base. Plastic pouch.

ORDER INFO: See Warranty at right.

9 HT 6848-Shipping weight 13 oz. \$5.88

Staples for above. Package of 1000 staples .030 diameter. 3/16 in. long.

9 HT 68463-Shipping weight 5 oz. Pkg. 94c

Whammer™ Nail Gun

The perfect paneling tool drives nails and countersinks automatically

(5) **CONSTRUCTION:** Chrome-plated steel housing. Spring-driven inner mechanism. Safety lock. Snap-open nose for loading.

ACCESSORIES: Includes edge-guide to help drive nails evenly; plastic pouch, instructions.

ORD. INFO: Drives 1 1/2-in. nails (sold below).

9 HT 6841-Wt. 2 lbs. 7 oz. \$14.95

Whammer™ Nails. Brad-type. Chiseled tips, 18-gauge steel. 1 1/2-in. long. Pkg. of 500.

COLORS, ORDER INFO: Wt. 7 oz.

9 HT 68412-Off-white Pkg. 94c

9 HT 68413-Light wood Pkg. 94c

9 HT 68414-Medium wood Pkg. 94c

9 HT 68415-Dark wood Pkg. 94c

CRAFTSMAN® Riveters



\$5⁹⁴

\$13⁹⁹

(6) **Standard-duty Riveter Kit**

CONSTRUCTION: Stamped steel frame; plastic grips on handles. Sliding nose piece. Compact design for narrow areas. Accepts rivets 1/8, 3/32-in. only (sold below).

ACCESSORIES: Includes 30 assorted rivets and 10 back-up plates.

ORDER INFO:

9 HT 7476-Wt. 1 lb. 1 oz. Kit \$5.94

(7) **Heavy-duty Riveter.** Professional-quality riveter has power for variety of riveting jobs.

CONSTR.: Steel, Plastisol-covered handles. Steel nose guide.

ACCESSORIES: Two interchangeable nose pieces permit use of all rivets sold below; plastic pouch.

ORDER INFO: Warranty below.

9 HT 7475-Wt. 1 lb. 8 oz. \$13.99

Rivets for riveters above. Use short-length rivets for work up to 1/8-in. thick; medium-length for work 1/8 to 1/4-in. thick; long-length for 1/4 to 3/8-in. thick.

ORDERING INFORMATION:

Catalog Number	Length	Diam. in.	Box of	Wt. oz.	Per Box
Aluminum Rivets					
9 HT 74501	Short	1/8	50	3	94c
9 HT 74502	Med.	1/8	40	3	94c
9 HT 74503	Med.	3/32	35	4	94c
9 HT 74504	Long	3/32	35	4	94c
9 HT 74505	Med.	1/16	25	4	94c
9 HT 74506	Long	3/16	25	4	94c
White Aluminum Rivets					
9 HT 74511	Short	1/8	50	3	94c
Steel Rivets					
9 HT 74507	Short	1/8	60	5	94c
9 HT 74508	Med.	1/8	50	5	94c
9 HT 74509	Long	1/8	45	5	94c


Back-up plates. (Not shown.) Help to hold 1/8-inch diameter rivets securely. For 1/8-inch diameter rivets in soft material and large holes. Box of 50.

ORDERING INFORMATION:

9 HT 74539-Shipping weight 4 ounces Box 64c

Full One Year Warranty on CRAFTSMAN Manual Staplers or Manual Riveters: If this CRAFTSMAN Manual Stapler or Manual Riveter fails to give complete satisfaction within 1 year from date of purchase, return it to the nearest Sears store throughout the United States, and Sears will replace it, free of charge. This warranty gives you specific legal rights, you may also have other rights which vary from state to state.

Heavy-duty Casters for office and industrial use



(8) **CONSTRUCTION:** Polymer plastic seals in bearing end washers so bearings withstand irregular lubrication maintenance. Honcho® abrasion-resistant polyurethane tread bonded to formed, welded steel core for heavily-loaded hand-pushed or conveyor-towed operation on hard floors or carpet, especially suited to industrial use, and use in commercial kitchens. Canaphin® phenolic plastic wheel reinforced with macerated canvas for resistance to many chemicals and heat up to 300°F. For heavy loads on hard floors, carpets. Bolts not included.

CAPACITIES AND ORDERING INFORMATION: Easily accessible Alemite® fittings. Load capacity listed pertains to maximum load per caster when in motion. When motionless, weight capacities double.

Item	Load Cap. lbs.	Tread width in.	Ball Bearing Type	Rigid			Swivel				
				Catalog Number	Wt. lbs. oz.	Price Each	Catalog Number	Wt. lbs. oz.	Price Each		
6-inch diameter wheel; caster height: 7 1/2 inches; swivel radius: 4 inches											
Honcho®	900	2	self-lube	T9HT74462	5	10	\$16.29	T9HT74461	6	15	\$18.99
Canaphin®	900	2	self-lube	T9HT74464	5	10	11.99	T9HT74463	6	15	14.39
8-inch diameter wheel; caster height: 9 1/2 inches; swivel radius: 6 inches											
Honcho®	900	2	self-lube	T9HT74466	7	10	\$20.39	T9HT74465	8	14	\$23.99
Canaphin®	900	2	self-lube	T9HT74468	6	14	14.39	T9HT74467	8	2	17.99

(9 thru 11) **Castors with rubber or Semi-steel wheels**

CONSTRUCTION: Flat top plate with zinc-plated finish for rust-resistance, brightness. Baco® soft rubber tread on hard rubber core for quiet operation of items hand-pushed on hard and smooth floors. Atlaste® hard rubber tread on hard rubber core for shock-resistant performance on carpet and hard, smooth floors. Biron® powdered iron wheels for performance on rough or chip-littered floors. Semi-steel... semi-steel wheel for performance on wood and wood block floors as well as rough, chip-littered floors.

CAPACITIES AND ORDERING INFORMATION: Load capacities listed pertain to maximum load per caster when in motion. When load is motionless, weight capacities are doubled. See shipping note on page 34.

Item	Load Cap. lbs.	Tread width in.	Ball Bearing Type	Rigid			Swivel				
				Catalog Number	Wt. lbs. oz.	Price Each	Catalog Number	Wt. lbs. oz.	Price Each		
3-inch diameter wheel; caster height: 3 1/4 inches; swivel radius: 2 1/4 in.											
(9) Baco	125	1	self-lube	T9HT74469	1	6	\$3.29	T9HT74473	1	11	\$3.69
(9) Atlaste	210	1	self-lube	T9HT74471	1	8	3.29	T9HT74474	1	13	3.69
(10) Biron	250	1	plain*	T9HT74472	2	1	3.29	T9HT74475	2	5	3.69
4-inch diameter wheel; caster height: 5 inches; swivel radius: 3 1/4 inches											
(9) Baco	200	1 1/2	self-lube	T9HT74476	2	9	\$5.89	T9HT74479	3	5	\$6.99
(9) Atlaste	300	1 1/2	self-lube	T9HT74477	2	12	5.89	T9HT74481	3	9	6.99
(11) Semi-steel	350	1 1/2	plain*	T9HT74478	3	10	6.29	T9HT74482	4	7	7.39

*Wheel serves as its own bearing material

(1) **Offset Screwdriver.** Use in tight places. Four 1/4-inch chrome-vanadium alloy steel blades.

ORDERING INFORMATION:
9 HT 4110—Shpg. wt. 6 oz. \$2.77

(2) **Ratchet Offset Screwdriver.** Nickel-plated steel body, alloy steel blades. Reverses removing screws.

SIZES, ORDERING INFO: Wt. 4 oz.
9HT4117—1/4 and 3/8-in. bits \$2.17
9HT4119—Nos. 1, 2 Phillips bits 2.77
9HT4116—No. 2 Phillips, 1/4-in. bits. 2.77

(3) **Screw-holding Starter.** Starts most sizes of standard slotted screws. Alloy steel blade and bit. Aluminum handle. Magnetic pick-up tip on handle.

SIZES, ORDERING INFORMATION:
9 HT 41024—5/8-in. long. Wt. 3 oz. \$2.19
9 HT 41025—9/8-in. long. Wt. 4 oz. 2.39

(4) **Magnetic-tip Screwdriver.** Permanent magnet holds screws for starting. Chrome-vanadium alloy steel tips. Aluminum shank. Hollow butyrate handle stores bits. 8 in. long.

SIZES: 4 steel bits (3/16, 1/2-in. standard; Nos. 1, 2 Phillips).

ORDERING INFORMATION:
9 HT 41467—Wt. 8 oz. \$3.77

Replacement Bit Set for (4).

ORDERING INFORMATION:
9 HT 41468—Shpg. wt. 4 oz. Set \$1.97

(5) **6-pc. Precision Screwdriver Set.** Precision ground. Nickel-plated steel handle. Blades held in threaded chuck. Case.

SIZES: Five 3/4-in. blades (.040, .055, .070, .100-in., and Phillips type).

ORDERING INFORMATION:
9 HT 4107—Shpg. wt. 4 oz. Set \$2.49

(6) **4-in-1 Screwdriver Set.** Butyrate handle. Two reversible combination blades 6 1/2 inches long.

SIZES: Nos. 1 and 2 Phillips; 1/4, 3/16-inch standard ends.

ORDERING INFORMATION:
9 HT 41504—Shpg. wt. 7 oz. Set \$3.97

(7) **CRAFTSMAN Auto-return Screwdriver.** 19 1/2-in. extended. Turns right and left. Locks when closed. Chrome-plated metal parts.

SIZES: 3 alloy steel bits (No. 2 Phillips, 1/4-inch and 3/32-inch).

ORDER INFO: See Warranty on page 101.
9 HT 3103—Shpg. wt. 1 lb. 3 oz. \$13.47

Replacement Bit Set for (7). From Japan.

ORDERING INFORMATION:
9 HT 4198—Shpg. wt. 5 oz. Set \$1.97

3-pc. Phillips type Replacement Bit Set. Fits (7), former 9-3470, 9-3101, other automatic screwdriver brands. From Japan.

SIZES: Nos. 1, 2 and 3 Phillips. 3/32-in. shanks.

ORDERING INFORMATION:
9 HT 4115—Shpg. wt. 4 oz. Set \$2.47

(8) **CRAFTSMAN Small Auto-return Screwdriver.** 10 in. extended. Turns right or left. Locks when closed. Nickel-plated metal parts.

SIZES: 4 bits (3/64, 1/64 and 1/4-inch; No. 2 Phillips).

ORDERING INFORMATION:
9 HT 3102—Shpg. wt. 11 oz. \$6.97

3-piece Bit Set. For (8) and former 9-3180, 9-3461, 9-3100. From Japan.

SIZES: 3/32, 7/32-in., No. 2 Phillips.

ORDERING INFORMATION:
9 HT 4153—Shpg. wt. 4 oz. Set \$1.97

(9) **Auto-return Screwdriver.** 10 1/2 in. extended. Carbon-steel blades. Spring-return action, blade spirals left or right. Handle compartment holds bits.

SIZES: 6 bits (3/64, 7/64, 1/64-in. drill bits, 3/16, 1/4-in., No. 2 Phillips). From Japan.

ORDER INFO: Not Craftsman.
9 HT 3105—Shpg. wt. 14 oz. \$5.47

Replacement Bit Set for (9). Japan.


ORDERING INFORMATION:
9 HT 3106—Shpg. wt. 4 oz. Set \$1.17

(10) **Emergency Repair Kit.** Plastic handle with 1/8, 3/16, 1/4-in., Phillips Nos. 1, 2 screwdriver bits; offset screwdriver; 6-in. slip-joint pliers; 6-in. adjustable wrench; 6-in. long nose pliers. Pouch.

ORDER INFO: Not Craftsman.
9 HT 41877—Wt. 1 lb. 8 oz. Kit \$8.47



CRAFTSMAN® Screwdrivers... SAVE when you buy in sets

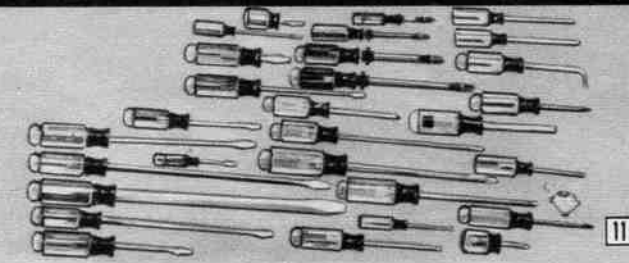

Choose Sets from 4 to 30 pieces

CONSTRUCTION: Butyrate plastic color-coded handles for easy identification. Wide flutes and serrations on thumb knurl for added control. Handles proportioned to blade size. Chrome-vanadium alloy steel blades. Nickel-chrome plated. Flat blades fully ground on all sides of the head for accuracy, appearance and performance. Heat-treated for maximum durability. Slotted types have square shafts. Phillips type have round shafts.

30-pc. Set \$49.88 | 20-pc. Set \$34.77 | 9-pc. Set \$16.97 | 6-pc. Set \$7.97

(11) **30-pc. Screwdriver Set. Separate prices total \$61.29.**

SIZES: 10 Slotted (1/8x4, 3/16x4, 3/16x9, 1/4x4, 1/4x6, 1/4x12, 5/16x13/4, 5/16x8, 3/8x12, 1/2x11/4). 7 Phillips: Nos. 0(2 1/2-in.), 1(3-in.), 2(4-in.), 2(8-in.), 3(6-in.), 4(8-in.), No. 2 Stubby. 1 Reed Prince. 4 screw-holding slotted types (1/8x4, 1/8x2 1/2, 3/16x5, 3/16x7-in.). Pocket clip (1/8x2-in.), 4-way pocket screwdriver, screw-starter, scratch awl, magnetic-tip, cotter key extractor, 2 clutchheads (3/32, 3/16).

ORDER INFO: See Warranty p. 101.
9 HT 41081—Wt. 6 lbs. 2 oz. \$49.88

20-pc. Screwdriver Set. Separate prices total \$43.70.

SIZES: 11 Slotted (1/8x2, 1/8x4, 3/16x4, 3/16x9, 1/4x4, 1/4x6, 1/4x12, 5/16x13/4, 5/16x8, 3/8x12, 1/2x11/4-in.). 7 Phillips: Nos. 0(2 1/2-in.), 1(3-in.), 2(4-in.), 2(8-in.), 2(1 1/4-in.), 3(6-in.), 4(8-in.). One Reed Prince. One 1/8x4-in. screw-holding slotted type.

ORDER INFO: See Warranty page 101.
9 HT 41082—Wt. 5 lbs. Set \$34.77

9-pc. Screwdriver Set. Separate prices total \$19.03.

SIZES: 5 Slotted (1/8x4, 3/16x4, 3/16x9, 1/4x6, and 3/8x12-in.). 4 Phillips: Nos. 0(2 1/2-in.), 1(3-in.), 2(4-in.), 3(6-in.).

ORDER INFO: See Warranty page 101.
9 HT 41099—Wt. 2 lbs. 14 oz. \$16.97

6-pc. Screwdriver Set. Separate prices total \$8.94.

SIZES: 2 std. screwdrivers (3/16x4, 1/4x6-in.); 2 Phillips screwdrivers (Nos. 1, 2); pocket clip (1/8x2-in.); key chain 4-way pocket screwdriver (no butyrate plastic handle).

ORDERING INFORMATION: See Warranty on page 101.

Shpg. wt. 1 lb. 4 oz.
9 HT 41089 Set \$7.97

4-pc. Standard Screwdriver Set. Separate prices total \$6.58.

Rated Sears Best.
SIZES: 1/4x6-in., 3/16x4-in., 1/8x4-in., 1/8x2-in. pocket size with clip.

ORDERING INFORMATION: See Warranty on page 101.

Shpg. wt. 15 oz.
9 HT 41501 Set \$5.97

4-pc. Phillips Set. Separate prices total \$7.48. Rated Sears Best.

SIZES: 4 Phillips (Nos. 0, 1, 2 and 3).

ORDERING INFORMATION: See Warranty on page 101.

Shpg. wt. 1 lb. 1 oz.
9 HT 4147 Set \$5.97

Individual Screwdrivers... Standard, Phillips or Reed Prince

(12) **Standard Screwdrivers.**

SIZES, ORDERING INFORMATION: Fits regular slotted screws.

Catalog Number	Blade inches	For screws	Wt. oz.	Each
9 HT 41589	1/4x4	Ex. small	3	\$1.47
9 HT 41581	1/4x4	Small	5	1.77
9 HT 41582	1/4x9	Small	5	2.17
9 HT 41583	1/4x4	Medium	6	1.97
9 HT 41584	1/4x6	Medium	7	2.17
9 HT 41585	1/4x12	Medium	8	2.77
9 HT 41586	3/16x13/4	Large	6	2.77
9 HT 41587	3/8x8	Large	9	2.97
9 HT 41588	3/8x12	Ex. large	14	3.87

Standard Stubby Screwdriver.

SIZES, ORDERING INFORMATION: With 1/4x1 1/2-inch blade only. 3 1/4 inches long.

Shipping weight 4 ounces.
9 HT 4151 \$1.47

(13) **Phillips Screwdrivers.**

SIZES, ORDERING INFO: Fit cross-slotted screws.

Catalog Number	Size	For screws	Blade in.	Wt. oz.	Each
9 HT 41293	0	Ex. small	2 1/2	3	\$1.47
9 HT 41294	1	Small	3	4	1.67
9 HT 41295	2	Medium	4	4	1.87
9 HT 41296	2	Medium	8	6	2.27
9 HT 41297	3	Large	6	7	2.47
9 HT 41298	4	Ex. large	8	10	3.27

Phillips Stubby Screwdriver.

SIZE, ORDERING INFO: 1 1/4-in. blade. No. 2 bit. 3 1/4 in. long.
9 HT 4118—Shpg. wt. 4 oz. \$1.77

(14) **Reed Prince Screwdriver.** For cross-recessed screws.

SIZE, ORDER INFO: 1/4x4-in. blade.
9 HT 4114—Shpg. wt. 5 oz. \$1.97

Specialty Screwdrivers

(15) **Pocket-clip Screwdriver.**

SIZE, ORDERING INFO: With 1/8x2-in. blade. Standard bit. 4 in. long.
9 HT 41421—Wt. 3 oz. \$1.17

(16) **Screw-holding Drivers.**

adjusts fast, wedges firmly in slot. Fits sunken screws—needs clearance of screw head.

SIZES, ORDERING INFORMATION:


Catalog Number	Blade size	Shpg. wt.	Each
9 HT 41122	1/4x2 1/2 in.	3 oz.	\$2.17
9 HT 41123	1/4x4 in.	4 oz.	2.27
9 HT 41124	3/16x5 in.	5 oz.	2.57
9 HT 41125	3/16x7 in.	6 oz.	2.77

(17) **Wedge-type Screw-holding Drivers.** Thumb control holds screw for one-hand use.

SIZES, ORDERING INFORMATION:
9 HT 41201—1/8x3 in. Wt. 3 oz. \$2.27
9 HT 41202—3/16x4 in. Wt. 4 oz. 2.57
9 HT 41203—1/4x4 in. Wt. 5 oz. 2.77
9 HT 41204—1/4x6 in. Wt. 6 oz. 2.97

4-pc. Screw-holding Driver Set. Includes one screwdriver in each of four sizes listed under item (17) above.


ORDERING INFORMATION:
Shipping weight 13 ounces.
9 HT 41205 Set \$8.97

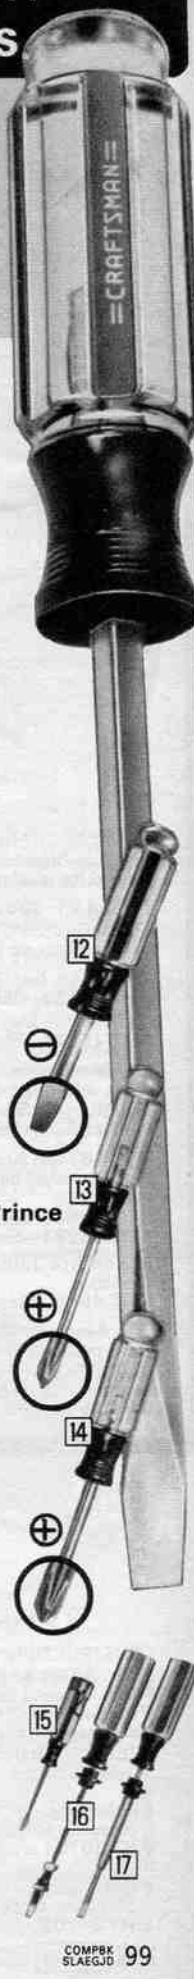

CRAFTSMAN® Steel Pliers... they're all backed by our famous Hand Tool

• They all have machine-milled jaws that provide firm, even holding power...
hard steel teeth endure years of wear for consistent vise-like gripping

• Plus precision-fitted joints open and close easily and smoothly

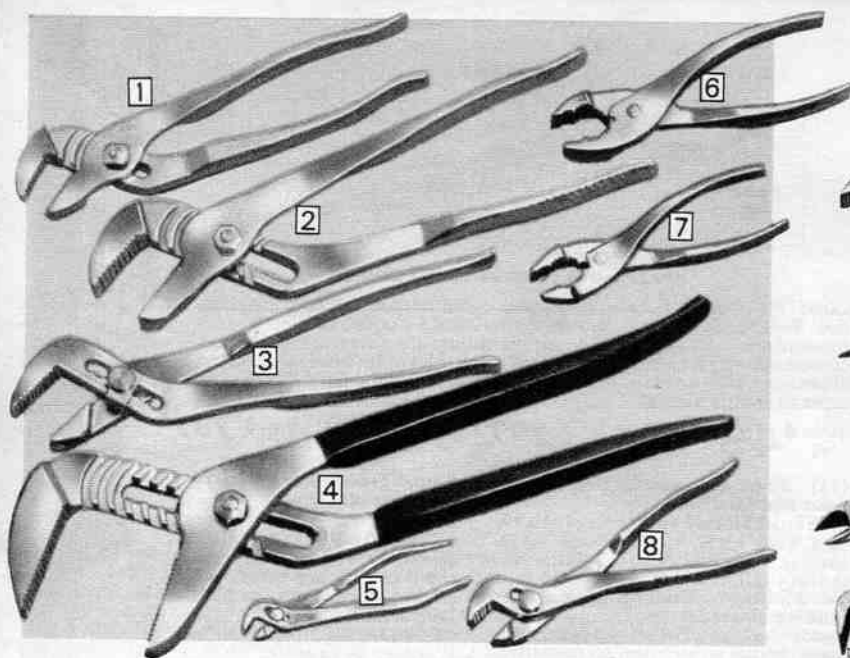

(1 thru 8) Adjustable-Joint Pliers

CONSTRUCTION: Single-hand grip clamps jaws... combines with pipe wrench-type precision-broached teeth to hold work firmly. Forged high-carbon boron steel is heat-treated for maximum durability. Nickel-chrome plated.

(1 and 2) Arc Joint® Pliers

SIZES, ORDERING INFORMATION:
See warranty on facing page.

(1) 9½ in. long. 5 position, 1½-in. jaw capacity.
9 HT 45382—Shipping weight 14 oz. \$4.97

(2) 12½ in. long. 7 position, 2½-in. jaw capacity.
9 HT 45271—Shpg. wt. 1 lb. 7 oz. \$6.37

(3) Mechanics' Pliers. 10½ inches long. 7 position, 2-inch jaw capacity.

ORDER INFO: See warranty on facing page.
9 HT 45375—Shipping wt. 1 lb. 1 oz. \$4.47

(4) 16-inch Arc Joint® Pliers. Heavy-duty. Plastic-coated handles. 11 position, 4-inch jaw capacity.

ORDER INFO: See warranty on facing page.
9 HT 45384—Shpg. wt. 2 lbs. 15 oz. \$10.47

6-inch Arc Joint® Water Pump Pliers (not shown).
9 HT 4545—Shipping weight 8 ounces .. \$3.89

(5) 5-inch Ignition Pliers. Thin jaws at 40° angle. 3 position, ½-inch jaw capacity.

ORDERING INFORMATION:
See warranty on facing page.
9 HT 4513—Shipping weight 4 ounces .. \$2.17

(6 and 7) Slip Joint Utility Pliers

Double-curved jaws grip ⅜-in. stock or 1-inch pipe with same power. Has wire-cutting slot.


SIZES, ORDERING INFO:
See warranty on facing page.

(6) 6¼ inches long.
Shipping weight 9 ounces.
9 HT 45372 \$2.97

(7) 8 inches long.
Shipping weight 14 ounces.
9 HT 45373 \$3.37

(8) 7-inch Battery Pliers.
Deep cut teeth for gripping. 22° angle head with taper nose. Two position, ½-inch jaw capacity.

ORDERING INFORMATION:
See warranty on facing page.
Shipping weight 8 ounces.
9 HT 44763 \$3.37

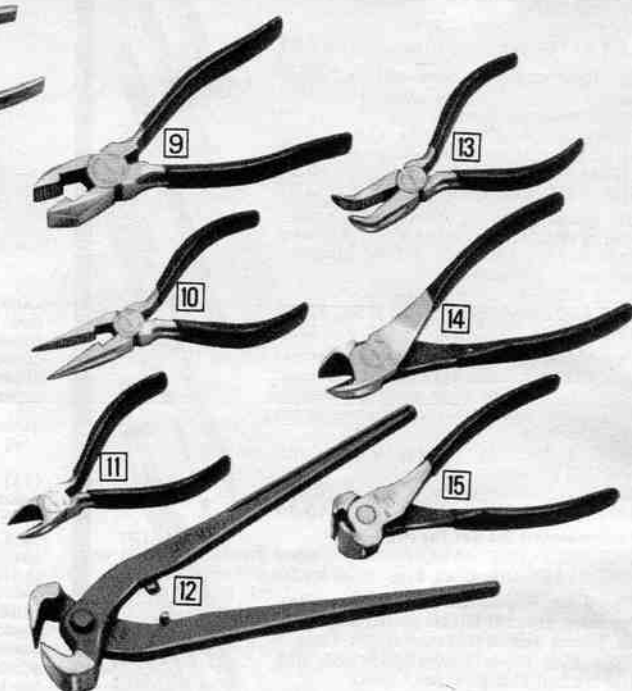

(9 thru 15) Solid-Joint Pliers

CONSTRUCTION: High carbon steel. Edges induction-hardened for maximum durability.

(9) Lineman's Pliers. Beveled nose, side-cutting jaws. Plastic-coated grips.

SIZES, ORDERING INFO:
See warranty on facing page.

7 in. long. 1.35-in. jaw capacity.
9 HT 45091—Wt. 13 oz. \$6.97

8½ in. long. 1.5-in. jaw capacity.
9 HT 45181—Wt. 1 lb. 2 oz. \$7.77

(10) Long Chain-nose Pliers. Form wire loops, grip tiny pieces. Wide side cutters, long, tapered jaws. Plastic-coated handles.

SIZES, ORD. INFO: Warr. p. 101.
9 HT 45081—6-in. Wt. 9 oz. \$5.67

9 HT 45082—8-in. Wt. 10 oz. 5.97

6-inch pliers without side cutters.
9 HT 45084—Wt. 9 oz. \$4.47

(11) Diagonal Cutting Pliers. For switchboards, ignitions systems. Fitted, plastic-coated handles.

SIZES, ORDERING INFO:
Warranty facing page.

9 HT 45071—5-in. Wt. 6 oz. \$5.37

9 HT 45072—6-in. Wt. 9 oz. 5.87

9 HT 45073—7-in. Wt. 10 oz. 6.27

(12) Nail-cutting Nippers. Hand-honed cutting edges. Cut up to 16-penny box nails.

SIZES, ORD. INFO: Warr. p. 101.

10 inches long.
9 HT 45241—Wt. 15 oz. \$6.47

14 inches long.
9 HT 45231—Wt. 2 lbs. 5 oz. \$7.47

(13) Bent Needle-nose Pliers. Bend wire, retrieve small parts. Plastic-coated handles. 6 in. long.

ORDER INFO: Warr. p. 101.

Shipping weight 7 ounces.
9 HT 45083 \$5.97


(14) Wide-jaw Diagonal-cutting Pliers. Heavy-duty for cuts on steel wire, etc.—even BX cable. Plastic-coated handles. 7 in. long.

ORDER INFO: Warr. p. 101.

9 HT 45074—Wt. 10 oz. \$6.27

(15) End-cutting Nippers. Twist, cut heavy wire, nails. Plastic-coated handles. 6 in. long.

ORDER INFO: Warr. p. 101.
9 HT 4502—Wt. 9 oz. \$6.47



(23 thru 25) Sears Adjustable-joint Pliers

CONSTRUCTION: Drop-forged, hardened steel.

(23) Sears Slip-joint Pliers. Knurled handles. Two position, 2.8-inch jaw capacity. Japan.

SIZES, ORDER INFO:
Not Craftsman.

6 inches long.
Shipping weight 8 oz.
9 HT 30701 \$1.77

8 inches long.
Shipping wt. 10 oz.
9 HT 30702 \$1.97

(24) 9½-inch Slip-Joint Utility Pliers.

Deep-milled narrow jaws. 5 position with 1½-inch jaw capacity.

From Japan.

ORDERING INFORMATION:
Not Craftsman.

Shpg. wt. 14 oz.
9 HT 3072 \$3.17

(25) Sears Milled-Groove Joint Pliers. From Japan.

SIZES, ORDER INFO:
Not Craftsman.

10-in. 5 pos. 1½-in. jaw cap.
9 HT 30723—Wt. 15 oz. \$3.97

12-in. 6 pos. 2-in. jaw cap.
Shipping weight 1 lb. 8 oz.
9 HT 30724 \$5.27

16-in. 11 pos. 4-in. jaw cap.
Shpg. wt. 2 lbs. 15 oz.
9 HT 30725 \$8.99

(26 thru 28) Sears Solid-Joint Pliers

(26) Sears Lineman's Pliers. Bevel nose, honed side cutters. Polished head. Alloy steel with plastic-coated grips. Japan.

SIZES, ORDER INFO:
Not Craftsman.

7 in. long. 1.35-in. jaw capacity. Wt. 12 oz.
9 HT 3079 \$3.97

8 in. long. 1.5-in. jaw cap. Shpg. wt. 1 lb. 1 oz.
9 HT 3080 \$4.29

(27) Diagonal Cutting Pliers. Hardened edges, beveled and ground. High carbon steel with plastic-covered grips. Jaws open 1.2 inches. Japan.

SIZES, ORDER INFO:
Not Craftsman.

5 inches long.
Shipping weight 5 oz.
9 HT 30811 \$1.99

6 inches long.
Shipping weight 7 oz.
9 HT 3074 \$3.67

(28) Sears Long-nose Pliers. Polished head, side cutters. High carbon-steel with plastic-covered grips. Jaws open 2.2 in. Japan.

SIZES, ORDER INFO:
Not Craftsman.


5 in. long. Wt. 5 oz.
9 HT 30812 \$1.99

6 in. long. Wt. 7 oz.
9 HT 3077 \$3.67

8 in. long. Wt. 9 oz.
9 HT 30771 \$4.17

Warranty

FULL UNLIMITED WARRANTY ON CRAFTSMAN HAND TOOLS AND POCKET KNIVES. If any Craftsman hand tool or pocket knife ever fails to give complete satisfaction, return it to the nearest Sears store throughout the United States, and Sears will replace it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

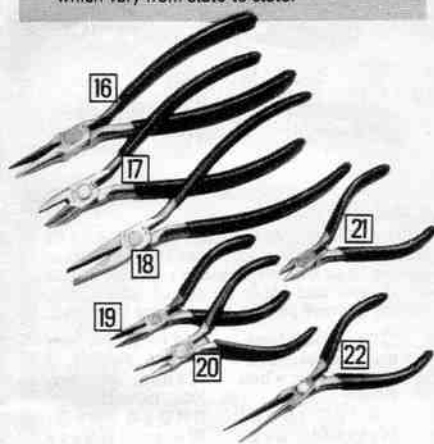

(16 thru 22) Precision Pliers

(16 thru 18) Regular Precision Pliers.

For intricate work on circuit boards, chassis parts, switches, sockets, and all electrical components.

CONSTRUCTION: Long slender heads, thin tips for tight places. Edges hand-honed for precision cutting. Polished drop-forged steel . . . plastic-covered grips.

TYPES, ORDER INFO: Warranty above.

(16) **Round Needle-nose.** 8 inches long.

9 HT 4505—Shpg. wt. 9 oz. \$6.37

(17) **Thin-head diagonal.** 7½ inches long.

9 HT 4539—Shpg. wt. 9 oz. \$6.97

(18) **Duck-bill flat.** 8 inches long.

9 HT 4509—Shpg. wt. 9 oz. \$6.37

(19 thru 22) **"Mini" Precision Pliers.** Professional type. For close delicate work where small size is needed to get into tight places.

CONSTRUCTION: Cutters hand honed. Return springs automatically open pliers when pressure is released. . . . let you work with one hand. Forged high-carbon steel. Heat-treated and finely finished. Plastic-covered grips.

TYPES, ORDER INFO: Warranty above.

(19) **Long-nose with cutter.** 4¼ in. long.

9 HT 45924—Shpg. wt. 7 oz. \$6.97

(20) **Flat nose.** 4¼ inches long.


9 HT 45944—Shpg. wt. 7 oz. \$6.47

(21) **Flush-cut diagonal.** 4¼ inches long.

9 HT 45904—Shpg. wt. 7 oz. \$7.47

(22) **Extra-Long Nose.** 5¼ inches long.

9 HT 45946—Shpg. wt. 8 oz. \$6.97



(29—31) Sears Precision Pliers

Sears "Midget" Pliers. Small size lets you maneuver in tight places. Professional-type precision designed for accurate work in hobbycrafts, watchmaking and repair, model building. From Japan.

CONSTRUCTION: Cutter edge honed. Drop-forged high carbon steel, tempered and hardened. Vinyl-covered hand grips. 4 inches long.

TYPES, ORDERING INFORMATION:

(29) **Long-nose Pliers.**

9 HT 30746—Shipping weight 5 ounces . . . \$3.27

(30) **Needle-nose Pliers.**

9 HT 30747—Shipping weight 6 ounces . . . \$3.27

(31) **Diagonal Cut Pliers.**

9 HT 30748—Shipping weight 5 ounces . . . \$3.27

CRAFTSMAN® Specialty Pliers

Heavy-duty Fence Pliers—even use as a hammer



Internal/external-type

(32) **Fence Pliers.** Drive and pull staples, can also be used as hammer. Cut and splice. Drop-forged steel. 10¼ in. long. Japan.

ORDERING INFORMATION:

See warranty above left.

9 HT 45226—Wt. 1 lb. 9 oz. . . . \$7.97

(33) **Snap-Ring Pliers.** Combination internal-external type. Steel. Plastic-covered grips. 4 pairs replacement tips: 2 pair straight, 1 pair 90°, 1 pair 45°.

ORDERING INFORMATION:

Warranty above left.

9 HT 45358—Wt. 10 oz. . . . \$7.27

Replacement tips for (33).

ORDER INFO: Box of four pairs.

9 HT 4535—Wt. 3 oz. . . . Box \$1.67



Locking Plier-Wrench. Holds like pliers . . . locks like a vise. 10-in. size gives 2 tons of gripping power.

(34 and 35) Does the work of pliers, clamp, gripping tool, pipe or locking wrench, adjustable wrench and portable vise.

CONSTRUCTION: Cold-forged steel with serrated jaws. 7½-in. size gives you 1½ tons of gripping power. Shaped to let you work in tight places. Thumb screw in handle adjusts jaw locking size. Squeeze handles to lock . . . slight upward pressure on release handle unlocks jaws. Strong spun rivet assembly. Nickel plated to resist rust, corrosion.

TYPES, SIZES, ORDERING INFORMATION: See warranty above left.

Catalog Number	Maximum length	Locked Capacity	Open Capacity	Shipping weight	Price each
(34) With straight jaws.					
9 HT 45342	7½ in.	1¼ in.	1¾ in.	1 lb. 1 oz.	\$3.95
9 HT 45341	10 in.	1½ in.	2 in.	1 lb. 8 oz.	4.15
(35) With double-curved jaws. Made for round stocks					
9 HT 45964	7½ in.	1¼ in.	1¾ in.	1 lb. 1 oz.	4.25
9 HT 45961	10 in.	1½ in.	2 in.	1 lb. 7 oz.	4.55

Locking Plier-Wrench Set. 1 each 7½, 10-in. straight jaw Pliers (34).

9 HT 45348—Shipping weight 2 pounds 9 ounces Set \$7.49

(36) **Sears Ring Pliers.** Used with 9 types of Truarc® retaining rings. Compress internal-type retaining rings or expand external. Alloy steel.

SIZES, ORDERING INFORMATION: Not Craftsman.

9 HT 45359—Small size. For 109 ring sizes. Shipping weight 5 oz. \$4.97

9 HT 45351—Large size. For 95 ring sizes. Shipping weight 8 oz. 5.27

(37 thru 42) Snips for cutting sheet metal, plastic

(37) **Sears Straight-Cut Snips.** Great for leather and rubber, too. Drop-forged steel with polished jaws. Fully hardened and tempered cutting edges.

SIZES, ORDER INFO: Not Craftsman.

7 in. long. Maximum cut 1¼ inches.

9 HT 45434—Wt. 10 oz. \$3.27

10 in. long. Maximum cut 2½ inches.

9 HT 45432—Wt. 1 lb. 3 oz. . . . \$4.47

12 in. long. Maximum cut 3 inches.

9 HT 45431—Wt. 1 lb. 13 oz. . . \$5.67

(38) **CRAFTSMAN Duckbill Snips.** For screening and wire, too. Forged steel blades with fully hardened and tempered cutting edges. Plastic-coated handles.

SIZES, ORDER INFO: Warranty above.

7 in. long. Maximum cut 1¼ in.

9 HT 45463—Shpg. wt. 10 oz. . . \$4.47

10 in. long. Maximum cut 2½ in.

9 HT 45461—Wt. 1 lb. 1 oz. . . \$5.97

12 in. long. Maximum cut 3 inches.

9 HT 45462—Wt. 1 lb. 13 oz. . . \$7.27

(39) **CRAFTSMAN Thin-nose Snips.** High carbon steel heat-treated. Polished jaws. Plastic-coated handles. 6 in. long. Maximum cut 1¼ in.

ORDERING INFO: Warranty above left.

9 HT 45441—Shpg. wt. 7 oz. . . \$4.97

(40 thru 42) **CRAFTSMAN Compound-leverage Snips.** Compound leverage gives 12-to-1 power ratio to cut with ½ the effort of regular snips.

CONSTRUCTION: Forged alloy-steel, heat-treated and hardened. Chrome-plated blades, serrated edges. 10 in. long with 1½-in. maximum cut. Vinyl plastic hand guard grips. Color-coded lock arm, see below.

SIZES, ORDER INFO: Warranty above.

(40) **For straight cuts. Yellow.**


9 HT 4275—Wt. 1 lb. 1 oz. . . . \$7.47

(41) **For left cuts. Red.**

9 HT 4274—Wt. 1 lb. 1 oz. . . . \$7.47

(42) **For right cuts. Green.**

9 HT 4273—Wt. 1 lb. 1 oz. . . . \$7.47

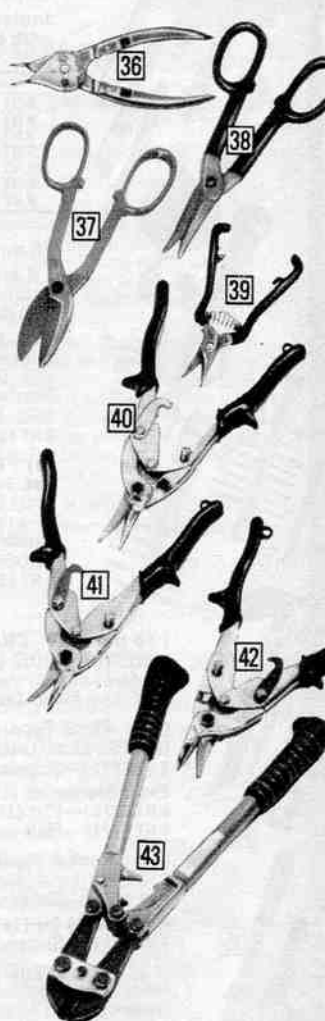

Sears Rod and Bolt Cutters and Replacement Heads

(43) **Long-handled Cutters.** Induction-alloy steel jaws with compound cutting action for cutting through soft and medium hard bolts. Vinyl-covered grips. Center cut. From Japan.

ORDERING INFORMATION: Not Craftsman.

24-inches long. Cuts through ¾-inch diameter soft or medium hard bolts.

9 HT 6566C—Shpg. wt. 8 lbs. \$21.97

18-inches long. Cuts through ½-inch diameter soft or medium hard bolts.

9 HT 6564—Shpg. wt. 4 lbs. 6 oz. . . . \$17.97

14-inches long. Cuts through ¼-inch diameter soft or hard medium hard bolts.

9 HT 6565—Shpg. wt. 3 lbs. 1 oz. . . . \$14.49

Replacement Heads for Rod and Bolt Cutters (not shown).

TYPES, ORDERING INFO:

For 9 HT 6566C.

Shpg. wt. 1 lb. 13 oz. \$8.97

9 HT 6563 \$6.97

For 9 HT 6564.

Shpg. wt. 1 lb. 6 oz. \$6.97

9 HT 6568 \$6.97

For 9 HT 6565.

Shipping weight 1 pound.

9 HT 6561 \$5.97

Lubricants for maintaining your valuable tools

(44) **Light Machine Oil.** Non-corrosive, light-duty oil in 1-quart can.

ORDERING INFORMATION:

9 HT 55941—Wt. 2 lbs. 7 oz. . . \$1.77

(45) **CRAFTSMAN Pump Oil.** Nickel-plated steel. 1-pc. dome, seamless bottom. 8½-in. spout. 14-oz. cap.

ORDERING INFORMATION:

Warranty above left.

9 HT 5582—Shpg. wt. 14 oz. . . . \$2.97

(46 and 47) **WD-40 all-purpose Oil.** Good for keeping tools well-lubricated. Helps prevent rust.

ORDERING INFORMATION:

(46) **9-ounce Spray Can.**

Shipping weight 1 pound, 1 ounce.

9 HT 55777 \$1.77

(47) **1-gallon Can.**

Shipping weight 8 pounds, 2 ounces.

9 HT 55782 \$7.97



Our finest
CRAFTSMAN®
Heavy-duty
Brace
\$19.99

(1) CRAFTSMAN® Heavy-duty Brace

CONSTRUCTION: Built for heavy-duty service. Enclosed box ratchet keeps dirt out, reducing wear. . . never needs lubricating. Rugged steel frame is 1/2-in. in diam. 10-in. sweep. Metal parts nickel-plated to resist rust. Steel reinforced high-impact Cycloc® plastic head turns on ball bearings. Brass reinforced center grip for added strength. Alligator-type self-centering chuck grabs both round, tapered-shank bits.

ORDER INFO: Warranty, p. 101.
9 HT 4241—Shpg. wt. 3 lbs. 1 oz. . \$19.99

(3 thru 7) CRAFTSMAN® Bits for Braces

(3 and 4) Solid-center Auger Bit Sets

Professional-quality wood-boring bits for use with hand braces. . . wood-tested for dependability. Heat-treated, tempered carbon tool steel. Precision-milled and polished. Self-starting screw points are accurately centered. Spiral twists are uniformly ground to close tolerances for precision cutting, smooth, non-binding action.

(3) 13-pc. Set without caps. Pouch incl. Sizes: 4/16 thru 1-in. in 16ths.

ORDER INFO: Warranty p. 101.
9 HT 41721—Wt. 3 lbs. 2 oz. . Set \$36.49

(4) 6-pc. Set with caps. Removable caps cover tips. Metal rack with pre-punched slots in back for mounting. Sizes: 1/4, 3/8, 1/2, 3/4, 1-inch diameter.

ORDER INFO: Warranty p. 101.
9 HT 41756—Wt. 1 lb. 12 oz. . Set \$15.99

Individual Solid-center Auger Bits with caps. Same quality bits as (4).

Cat. No.	Size	Wt.	Each
9 HT 41751	1/4 in.	3 oz.	\$2.69
9 HT 41753	3/8 in.	4 oz.	2.89
9 HT 41755	1/2 in.	5 oz.	2.89
9 HT 41757	3/4 in.	6 oz.	2.89
9 HT 41759	7/8 in.	6 oz.	3.19
9 HT 41762	1 in.	7 oz.	3.49
9 HT 41764	1 in.	9 oz.	3.89

(8 thru 12) Hand Drills Push Drills, Push Drill Points

(8 and 9) Steel, 3-jaw chuck clamps onto round-shank bits to 1/4-inch diameter.

(8) Multi-purpose Hand Drill. Nickel-plated steel frame, chuck nut. Double-pinion nylon gears. Hardwood handle. 10 3/4-in. ORD. INFO: Order drill bits p. 118.
9 HT 4210—Shpg. wt. 15 oz. . \$3.99

(9) CRAFTSMAN Hand Drill Set. 2-position wood handle. Pinion gears for smooth torque. 8 drill bits (1/16 thru 1 1/4-in.) stored in wood handle. 11 1/2-in. long.

ORDER INFO: Warranty, p. 101.
9 HT 4231—Wt. 1 lb. 9 oz. . \$10.99

(13 thru 16) CRAFTSMAN Forming Tools
CONSTRUCTION: Cut and form materials up to hardness of mild steel. Chisel-like teeth set in Sheffield Steel blade. Die-cast zinc alloy body.

(13) Plane Type. Plastic handle 5x12 1/2 in. long. ORDERING INFORMATION: Warranty page 101.
9 HT 67722—Shipping weight 1 lb. 8 oz. . \$6.49

Extra Blades for (13), (15). Shpg. wt. 5 oz.
9 HT 67731—Flat (1 1/8-in. wide) . . . \$1.79
9 HT 67732—Half-round (1 1/2 inches wide) . . . 1.99

(14) Pocket Plane Type. 2x5 3/8 in. long. ORDERING INFORMATION: Warranty page 101.
9 HT 67723—Shipping weight 9 oz. . \$2.89

Extra Blade for (14).
9 HT 67733—Shipping weight 3 oz. . \$1.39

(15) Round File Type. Enlarges holes, shapes concave or circular wood cuts. Hardwood handle. Blade diameter 3/8 in. 14 inches long.

ORDERING INFORMATION: Warranty page 101.
9 HT 67724—Shipping weight 8 oz. . \$3.79

(16) Flat File Type. 1 1/2x16 inches long. ORDER INFO: Order extra blades under (13) above. Warranty page 101.
9 HT 67721—Shipping weight 1 lb. 2 oz. . \$4.99

(17) Surform® Tool. For rough planing on curved and irregular surfaces. 7 1/2-inches long. ORDERING INFORMATION: NOT CRAFTSMAN.
9 HT 67727—Shpg. wt. 5 oz. . \$2.39

(2) Medium-duty Brace

CONSTRUCTION: Sturdy 7/16-in. steel frame. Designed to handle all but heavy-duty jobs which require professional brace at left. Steel reinforced hardwood head. Hardwood center grip. 2-jaw chuck holds both round, tapered-shank bits. Semi-enclosed ratchet. Knurled ring. Exposed parts nickel-plated. 10-inch sweep. Not Craftsman. Japan.

ORDERING INFORMATION:
9 HT 42402—Wt. 2 lbs. 5 oz. . \$5.99

(5) Expansive Bits. For wood.

Use one bit to cut holes of many sizes. 2 interchangeable, tempered steel blades with graduated 1/16-inch settings. Change settings easily. Standard Clark pattern. Tapered square shank.

SIZES, ORDER INFORMATION: Warranty page 101.

For 1/2 to 1 1/2-inch holes.

9 HT 41924—Wt. 6 oz. . \$6.79

For 3/8 to 3-inch holes.

9 HT 41934—Wt. 10 oz. . \$7.79

(6) Countersunk Bit. For wood. Forged steel. 3/8-inch size. 1/4-inch combination shank fits braces and drills.

ORDER INFO: Warranty p. 101.
9 HT 4205—Shpg. wt. 3 oz. . \$1.29

(7) Screwdriver Bits. For positive slotted screw driving. Forged steel. Square shank fits hand braces. 5-in. long.

ORDER INFO: Warranty p. 101.

Catalog No.	Width in.	Weight ounces	Price each
9 HT 41001	1/4	4	\$1.29
9 HT 41002	5/16	4	1.29
9 HT 41003	3/8	4	1.29

CRAFTSMAN® Knife Collection

(18) A.C.A. Edge® Lock-Back Knife. Our finest. . . Amazing Cutting Action blades of high-carbon rust-resistant steel. Blade locks securely in place, 4 1/16-in. long closed. ORDER INFO: See Warranty p. 101.
9 HT 95078—Shpg. wt. 12 oz. . \$29.97



(19 thru 21) A.C.A. Edge® Knives

CONSTRUCTION: Amazing Cutting Action edge (A.C.A. Edge®) blades made of hardened, high-carbon steel that's rust-resistant. . . three times sharper than our other blades. Bolsters and shield of brass alloy. Bolster and blade linings of solid brass. Handle of break-resistant Delrin® plastic. Sharpening instr. incl.

(19) Gentleman's Jackknife. 3 blades. 3 1/16-in. long. ORDER INFO: Warranty page 101. Wt. 4 oz.
9 HT 95067 . \$11.97

(20) The Stockman. 2 blades. 4 inches long when closed. ORDER INFO: Warranty page 101. Wt. 5 oz.
9 HT 95068 . \$14.97

(21) Premium Stock Knife. 2 blades. 3 1/16-in. long, closed. ORDER INFO: Warranty page 101. Wt. 4 oz.
9 HT 95068 . \$13.97

(22 and 23) Locking Blade Knives

CONSTRUCTION: Precision thumb-release lock. . . blade is locked in open position. Custom-fitted black Delrin® high-impact plastic handle. Polished, solid brass bolsters, linings. . . rust-proof. Steel spring. . . hardened, tempered, plus it's custom-fitted and adjusted for positive locking of blade.

(22) Lock-Back Knife. Rust-resistant high-carbon steel blade. . . 4 1/8-inch long with blade closed. ORD. INFO: Warranty p. 101.
9 HT 95075—Wt. 5 oz. . \$14.97

(23) Lock-Back Knife. Carbon steel blade. . . hardened, tempered. . . 3 1/16-inch long with blade closed. ORD. INFO: Warranty p. 101.
9 HT 95074—Wt. 5 oz. . \$10.97

(24 thru 27) Pocket Knives

CONSTRUCTION: High-carbon steel blades. Nickel-alloy bolsters. Brass linings and rivets. Handle of Delrin® plastic.

(24) The Lumberjack Knife. 2 blades, screwdriver, can opener. 3 3/4-inches long blade closed. ORD. INFO: Warranty p. 101.
9 HT 95043—Wt. 6 oz. . \$10.97

(26) The Jackknife. Two blades: pen and clip. 2 3/4 inches long with blades closed. ORD. INFO: Warranty p. 101.
9 HT 95041—Wt. 4 oz. . \$7.97

(25) The Bowie Stockman. 3 blades: clip with bar nail nick, sheepsfoot, spey. 4-inches long blade closed. ORD. INFO: Warranty p. 101.
9 HT 95044—Wt. 6 oz. . \$12.97

(27) Electrician's Knife. Two blades: spear, combination screwdriver and wire stripper. 3 3/4-in. ORD. INFO: Warranty p. 101.
9 HT 9560—Wt. 6 oz. . \$7.97



Planes

(28) Our Finest CRAFTSMAN Bench Planes. Cut with grain. Lever, screw device gives precise sidewise, depth adjustment for shaving cuttings tissue-thin to coarse-thick. Cast-iron sides, bottom are milled, ground for accuracy. Double-plane cutter with blade, cap. Snug-fitting frog eliminates jumping, sideplay. Cutlery-steel blade 2-in. wide. Wood handle and knob. ORD. INFO: Warranty, p. 101.

Smooth No. 4. For small workpieces. 9 in. long. Shpg. wt. 4 lbs. 2 oz.
9 HT 37064 . \$17.99
Jack No. 5. For truing big board surfaces. 14-in. long. Shpg. wt. 5 lbs. 4 oz.
9 HT 37065 . \$19.99

(29) Sears Bench Plane. All-purpose planing with the grain. Smooth No. 4. Cutlery-steel blade, 2-in. wide. Tool 9-inches long. ORDER INFO: NOT CRAFTSMAN.
9 HT 37063—Wt. 4 lbs. 7 oz. . \$12.99

(30 thru 32) CRAFTSMAN Block Planes. Use in one hand. . . makes easy work when job cannot be taken to bench or vise. For planing small pieces, beveling, planing corners, chamfering. Single cutlery-steel blade cutter set as low as 20° angle for cutting across grain. Adjust blade for any thickness. ORDER INFO: Warranty, page 101.

(30) 6-in. long. 1 1/4-in. blade. 9 HT 37052—Wt. 1 lb. 10 oz. . \$9.99
(31) 7-in. long. 1 1/4-in. blade. 9 HT 37051—Wt. 1 lb. 10 oz. . \$7.99
(32) 3 1/2-in. long. 1-in. blade. 9 HT 37057—Shpg. wt. 5 oz. . \$2.49

Miscellaneous Hand Tools

(33) CRAFTSMAN Glass Cutter. Super-tough tungsten-carbide cutting wheel. Malleable iron handle. ORD. INFO: Warranty p. 101.
9 HT 3797—Wt. 4 oz. . \$2.89

(34) CRAFTSMAN Scratch Awl. 3 1/4-in. tempered-steel blade in shock-proof plastic handle. ORDERING INFORMATION: Warranty p. 101.
9 HT 41027—Wt. 4 oz. . \$1.29

(35) CRAFTSMAN Revolving Punch. For leather, plastics, canvas, rubber. Made from nickel-plated steel. Sizes: 3/64, 3/32, 1/64, 1/32, 3/16-in. ORDERING INFORMATION: See warranty p. 101.
9 HT 4307—Wt. 12 oz. . \$4.49

(1 thru 5) Leather Tool Holders

(1) 6-pocket Nail, Tool Bag
CONST.: Glove leather.
COMPARTMENTS: 1 large, 1 med. nail, 4 small pockets. 2 tool loops, tunnel belt loop.
ORDER INFO: 10 1/2 x 12 in.
9 HT 45143—Wt. 1 lb. \$10.99



6 pockets \$10.99

(2 thru 5) Tool Holders
CONST.: Top grain saddle leather, oversized rivets.


(2) Electrician's Holder
COMPARTMENTS: Main, 3 front, 2 side pockets. Hammer loop, tape holder, tool snap, tape chain.

SIZE. ORDER INFO: 9x8 3/4 in.
9 HT 45447—Wt. 1 lb. 4 oz. \$9.99



(3) 7-pocket Tool Holder
COMPARTMENTS: Partitioned main, 3 front, 2 open-end small tool pockets, side loop, tape chain, tool snap, tunnel belt loop, tape pocket.

SIZE. ORDER INFO: 8x10 in.
9 HT 4580—Wt. 1 lb. 6 oz. \$12.49



(4) 5-pocket Tool Holder
COMP.: Large main, 2 front, 2 open-end pockets, steel tape holder, tape chain, tool snap, wide belt slots.

SIZE. ORDER INFO: 9x8 3/4 in.
9 HT 45446—Wt. 13 oz. \$6.99



(5) 5-pocket Tool Holder
COMPARTMENTS: Partitioned main, 3 front pockets. Strap loop, tape chain, tool snap. Belt slots.

SIZE. ORDER INFO: 9x8 3/4 in.
9 HT 45805—Wt. 1 lb. \$7.99



(6) Adjustable Belts. 29 to 46 in. Nickel-plated fittings. TYPE. ORDER INFO:

Cotton Web. 2 1/2 in. wide.
9 HT 45895—Wt. 11 oz. \$4.49


Leather Belt (not shown). 1 3/4 inches wide. Top grain saddle leather.
9 HT 45891—Wt. 9 oz. \$4.49



(7) Canvas Carpenter's Apron
CONST.: Cotton canvas. Criss-cross straps.

COMP.: 14. Wide bib. 3 rows of nail, tool pockets. 2 loops on both sides.

ORDERING INFORMATION:
9 HT 3750—Wt. 11 oz. \$3.99



Our Finest Leather Work Apron \$32.99

- Built totally of top-selected cow hides with hand-tooled detailing
- Comfortable "off-the-hip" design



CONSTRUCTION: Bags, pockets made of supple boot leather. Belt and trim of top-grain saddle leather. Adjustable bags and holders . . . hang to the front or to the side—adjust to any position for greatest comfort. Hand-tooled design on leather belt. Reinforced stitching, oversized rivets at stress points for years of wear.

COMPARTMENTS: 12 pockets. 2 large main pockets, 2 medium-sized pockets, 8 small tool pockets, steel tape holder, holster for combination square. 2 tool loops. 4 screwdriver slots. Key holder. Adjustable leather belt.

ORDERING INFORMATION:
9 HT 45152—Shpg. wt. 2 lbs. 9 oz. \$32.99

(8) Our most popular Leather Work Apron \$21.99

- Pockets made from top-selected hides—rough on outside . . . smooth on inside
- Pocket edges also leather-bound for long wear



CONSTRUCTION: Nail pockets are bound around all edges. Double-row stitching at stress points with linen thread. Oversized rivets capped on both sides. All-cotton web belt, 2 1/4 in. wide, with nickel-plated steel fittings. Split-leg design for comfort.

COMPARTMENTS: Ten pockets. Two large main nail pockets, 2 medium-sized nail pockets, 6 small tool pockets, steel tape holder, holster for combination square. Two tool loops.

(8) Leather Apron. Pockets of top-grain select hides. Smooth ball glove leather on inside.
ORDERING INFORMATION:
9 HT 45147—Wt. 2 lbs. 4 oz. \$21.99

(9) Tanera® (man-made) Apron. Pockets of synthetic "leather" Tanera® . . . feels real.
ORDERING INFORMATION:
9 HT 45151—Wt. 2 lbs. 2 oz. \$19.99



(10) Split-cowhide Work Apron \$15.99


CONSTRUCTION: Split-cowhide. Split-leg design. Stitching, rivets at stress points.

COMPARTMENTS: 4 pockets. 2 large, 2 medium nail pockets. Steel tape holder. Leather holster for square. 2 tool loops. Adjustable belt.

ORDERING INFORMATION:
9 HT 45149—Shipping weight 2 pounds 4 ounces. \$15.99



Construction and Masonry Specialty Tools

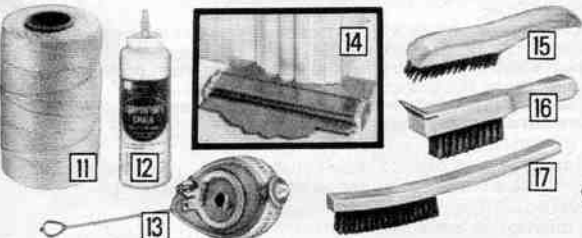

(11) Nylon Twine. 100 yds. No. 21. 177-lb. test. White.
ORDERING INFORMATION:
9 HT 76551—Wt. 10 oz. \$1.49

(12) Powdered Carpenters' Chalk. For use with (13) below. 8 oz. squeeze bottle. COLOR. ORDER INFO:
9 HT 37587—Blue. Wt. 11 oz. .99c
9 HT 37588—Red. Wt. 11 oz. .99c

(13) CRAFTSMAN Dual-purpose Chalk and Plumb Line. Full rewind cylinder; fold-away handle. Slide-action brake releases automatically. Die-cast case. Combination refill cap, plumb bob tip. Hook-ripping on end.
SIZE. ORDERING INFO:
50-foot Line.
9 HT 3773—Wt. 11 oz. \$2.99
100-foot Line.
9 HT 37734—Wt. 12 oz. 3.69

(14) Contour Gauge. Stainless steel needles form 6-in. row of contour. Plastic-coated steel body. W. Germany.
ORDERING INFORMATION:
9 HT 3946—Wt. 10 oz. \$4.29

(15) Down-curved back Wire Brush. 4 rows, 16 tufts. 1 1/2 x 10 x 1 in. Wood handle.
ORDERING INFORMATION:
9 HT 3669—Wt. 9 oz. \$1.39

(16) Wire Brush, Scraper. 4 rows of 10 tufts. 1 1/2 x 11 x 1 1/2 in. wide with 2 1/2 in. steel scraper. Wood handle.
ORDERING INFORMATION:
9 HT 3647—Wt. 15 oz. \$2.29

(17) Curved back Wire Brush. 3 rows of 19 tufts. 1 1/2 x 14 x 1 in. Wood handle.
ORDERING INFORMATION:
9 HT 3668—Wt. 9 oz. 89c

(18) Aluminum Float. For floating cement to surface before troweling. 14x4x1/4 in. deep. Wood handle.
ORDERING INFORMATION:
9 HT 65442—Wt. 14 oz. \$3.69

(19) Trowel. Spring steel, 4 1/2 x 10 inches. Wood handle, steel shank.
ORDERING INFORMATION:
9 HT 6592—Wt. 13 oz. \$2.19

(20) CRAFTSMAN Finishing Trowel. Spring steel. 4 3/4 x 11-in. blade. Aluminum alloy shank, wood handle.
ORDERING INFORMATION:
9 HT 6550—Wt. 1 lb. 2 oz. \$5.99

(21) CRAFTSMAN Patching Trowel. Steel. Blade 1 1/2 x 5 1/2 inches. Wood handle.
ORDERING INFORMATION:
9 HT 6589—Wt. 6 oz. \$2.19

(22) CRAFTSMAN Wall Scrapers. Flexible, carbon steel blades. Plastic handle with brass hammerhead for resetting drywall nails.
SIZE. ORDER INFO:
Four-inch blade.
9 HT 90054—Wt. 6 oz. \$3.09
Six-inch blade.
9 HT 90056—Wt. 7 oz. 4.19
3-in. without hammerhead.
9 HT 90171—Wt. 6 oz. \$2.39

(23) CRAFTSMAN Putty Knives. Carbon steel blade, 1 1/4 in. wide. Plastic handle.
ORDER INFO: Wt. 5 oz.
9 HT 90151—Flexible . . . \$1.79
9 HT 90161—Stiff . . . 1.79
9 HT 90091—Chisel-point . . . 1.99

(24) CRAFTSMAN Bricklayers' Chisel. Forged steel. 4-in. bit. Single bevel edge.
ORDERING INFORMATION:
9 HT 6558—Wt. 1 lb. 2 oz. \$4.29

(25) Philadelphia-pattern Brick Trowel. Tempered steel 4 1/2 x 8 1/2 in. Wood handle.
ORDERING INFORMATION:
Shpg. wt. 11 oz.
9 HT 6556 . . . \$3.29


(26) CRAFTSMAN Pointing Trowel. Steel blade. 2 3/4 x 5 1/2 in. Wood handle.
ORDERING INFORMATION:
9 HT 6581—Wt. 6 oz. \$2.29

How-To Booklets
TITLE. ORDER INFO: State catalog number and booklet number.

Bk. no.	Title	Wt. oz.
617	Concrete Work Simplified	6
631	How-to-Build Patios and Sundecks	6
668	Bricklaying Simplified	10
9 HT 2915H	Each	\$2.50

Stationary Electric Air Compressors

Choose from 1/2 to 5-HP models all with air tanks and safety valves that meet ASME† code

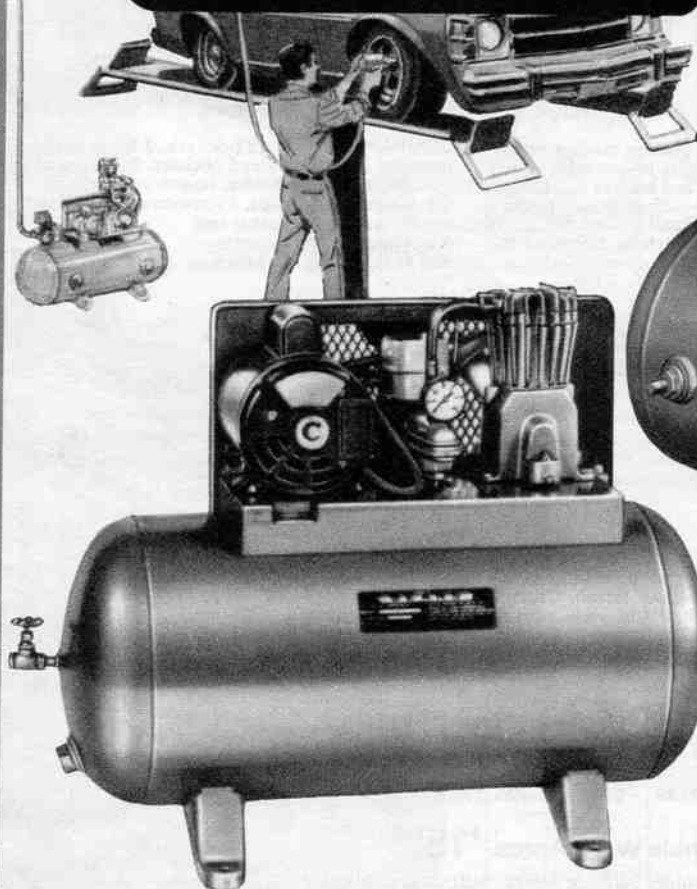

Single-stage Compressors

In sizes from 1/2-HP to 3-HP

Low as **\$259⁹⁹** 1/2-HP

DELIVERY RATES: See chart below. Maximum pressure is 125 PSI**.

AIR STORAGE TANKS: Pressure gauge and safety valve meet ASME† code. 1/2-HP model has 20 gallon tank; all others have 30 gallon tank.

COMPRESSOR, MOTOR: Auto. switch starts pump load-free. Check, safety valves; overload-protected electric motors. Protective belt and pulley guard.

ELECTRICAL INFORMATION: 6-foot cord. See chart below for voltage, watts.

SIZES, ORDERING INFORMATION: See chart below for voltage, watts.

See warranty information below.


HP	Catalog Number	Number of Cylinders	SCFM* at 40 PSI**	SCFM* at 90 PSI**	Watts at maximum pressure	Size, LxWxH, inches	Shpg. wt., lbs.	Price
These units operate on 110-120-volts, 60-Hertz AC, 1 PHASE								
1/2	30 HT 17012N	1	3.0	2.4	1400	31x19 1/2 x 27	129	\$259.99
3/4	30 HT 17031N	2	5.0	4.2	2300	39x24x31	205	299.99
This unit operates on 110-120 or 220-240-volts, 60-Hertz AC, 1 PHASE								
1	30 HT 17051N	2	5.3	4.5	2400	39x24x31	206	329.99
These units operate on 220-240-volts, 60-Hertz AC, 1 PHASE								
2	30 HT 17081N	2	8.3	6.9	2700	39x24x31	216	369.99
3	30 HT 17091N	2	9.4	7.9	2900	39x24x31	240	399.99

FULL ONE YEAR WARRANTY ON STATIONARY AIR COMPRESSORS

If any Stationary Compressor fails due to a defect in material or workmanship within one year from the date of purchase, return it to the nearest Sears Store throughout the United States and Sears will repair it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Sears Has a Credit Plan to Suit Most Every Need
See Big Book or ask for details

Vertical models let you use a 5-HP stationary compressor in areas where a horizontal unit with tank of similar size might not fit

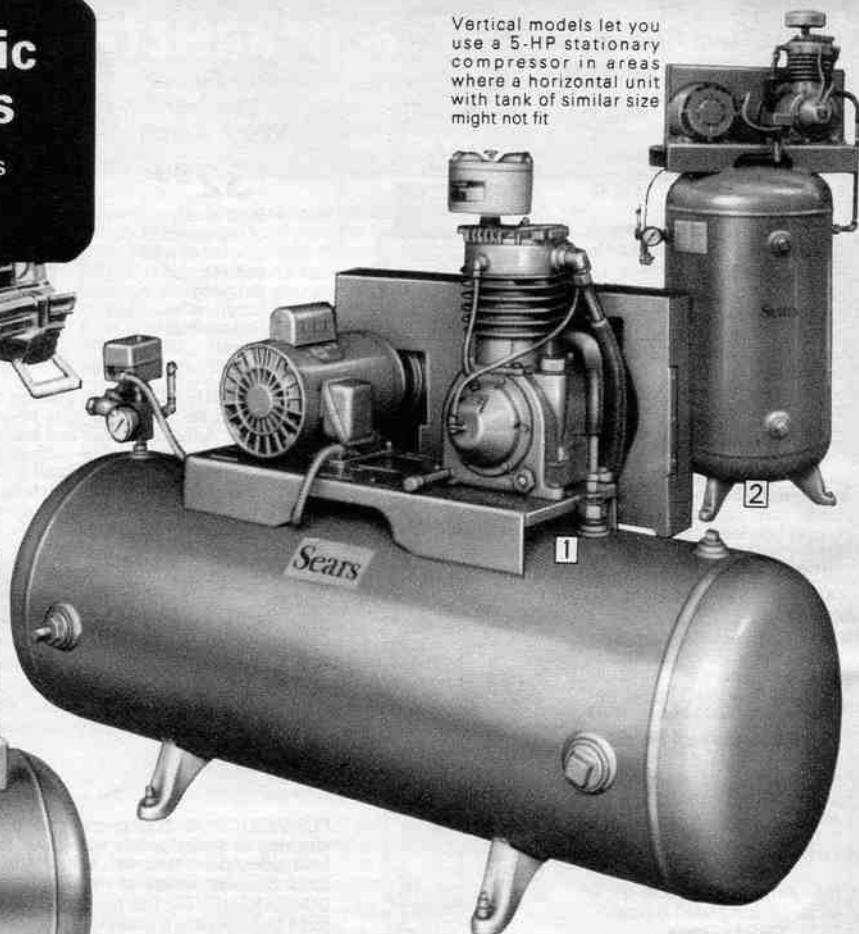

Two-stage Compressors

5-HP size in popular horizontal models... also available in space saving vertical models

Low as **\$999⁹⁹** 5-HP three-phase

Built with the stamina for garage or industrial use to run hydraulic lifts or operate any air tool.

DELIVERY RATES:

"Delivered air SCFM*", in chart below, represents actual air delivered, not displaced, at 175 PSI**. Delivers higher SCFM when operating at lower PSI.

AIR STORAGE TANKS:

Tank pressure gauge and safety valve meet ASME† code.

COMPRESSOR, MOTOR:

Two-stage 2-cylinder compressor with horizontal cooling fins means these units can deliver higher constant pressure up to 175 PSI and run cooler, last longer than single-stage units. Dual-stage pumps start load-free when pressure drops about 25 pounds below the cutout point. Centrifugal unloader for load-free starts. Fan-bladed flywheel, positive controlled lubrication and enclosed crankcase. Protective belt and pulley guard.

ELECTRICAL INFORMATION:

See volts and watts in chart below. Consult your local electrical contractor for recommended wiring, electrical codes and to order magnetic starter.

ORDERING INFORMATION:

See warranty information below, left.

(1) Compressors with horizontal air tanks

HP	Catalog Number	Delivered air, SCFM*	Tank size, gallons	Watts at max. pressure	Size, LxWxH, inches	Shipping weight, pounds	Price
1 PHASE 60-Hertz AC: Unit operates on 220-240-volts.							
5	30 HT 17316N	17.0	80	6000	64x23x43 1/2	520	\$1149.99
3-PHASE: SEE IMPORTANT NOTE BELOW BEFORE ORDERING THIS UNIT							
5	30 HT 17315N	17.0	80	6000	64x23x43 1/2	510	\$999.99

(2) Compressors with vertical air tanks

HP	Catalog Number	Delivered air, SCFM*	Tank size, gallons	Watts at max. pressure	Size, LxWxH, inches	Shipping weight, pounds	Price
1 PHASE 60-Hertz AC: Unit operates on 220-240-volts.							
5	30 HT 17336N	17.0	80	6000	33x17 1/2 x 67 3/4	530	\$1149.99
3-PHASE: SEE IMPORTANT NOTE BELOW BEFORE ORDERING THIS UNIT							
5	30 HT 17335N	17.0	80	6000	33x17 1/2 x 67 3/4	530	\$999.99

NOTE: 5-HP units 30 HT 17315, 30 HT 17335 operate on 220-240-v. (convertible to 460-v.) 3-PHASE 60-Hz. AC. Check with local power company to be certain proper electrical power is available before ordering unit.

*SCFM=Standard Cubic Feet per Minute **PSI=Pounds per Square Inch
†ASME=American Society of Mechanical Engineers

Gasoline Powered Air Compressors

Provide on-the-job air power anywhere... around the farm, far into the field, even on remote construction sites

YOU CAN DO MORE...



Sandblast brick... see page 106



Auto repairs, see pgs. 111 thru 113



Paint fences... see spray guns on pg. 108



Inflate tires... see page 107



Spray herbicides... see p. 108


Whatever the job... your Air Compressor can do more with the accessories on pages 106 thru 108 and pages 111 thru 113



Single-stage Portable Air Compressor

With a recoil start 5-HP engine and 20-gallon ASME† coded air storage tank

\$599⁹⁹

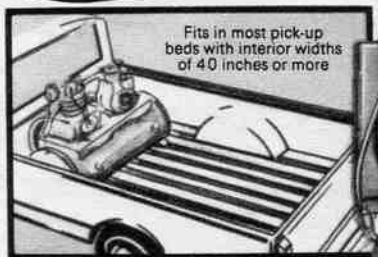


Fits in most pick-up beds with interior widths of 40 inches or more

Two-stage Air Compressor

Electric start 10-HP engine and 30 gal. ASME† coded, cradle-mounted air tank

\$1299⁹⁹

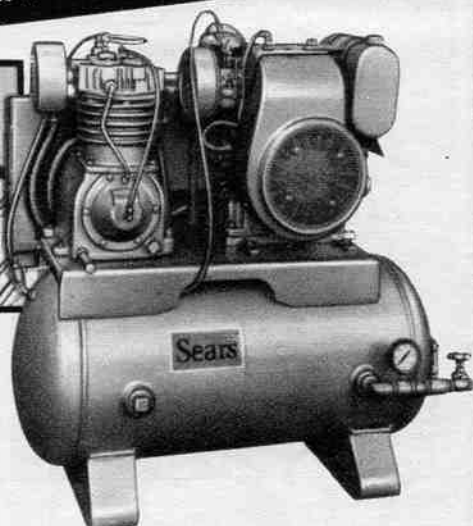

Offers both versatility and roll-about portability. Versatility to handle a wide variety of jobs around the home, shop or farm. Portability to operate far into the field. Operates many air tools... even our sandblaster and caulk gun on page 106.

Full One Year Warranty on Portable Sprayer/Compressor: If this paint sprayer/air compressor fails due to a defect in material or workmanship within one year from the date of purchase, return it to the nearest Sears store throughout the United States, and Sears will repair it, free of charge. If this paint sprayer/air compressor is used for commercial or rental purposes, the warranty will apply for thirty days from date of purchase. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

DELIVERY RATE: Delivers 12.1 SCFM* at 40 PSI**, 9.5 SCFM at 90 PSI 120 PSI max.

AIR TANK: 20 gal. tank, safety valve meet ASME† code. Tank pressure gauge incl.

COMPRESSOR, ENGINE: 2 cylinder compressor with vertical cooling fins. 5-HP, 4-cycle Briggs & Stratton® gasoline engine with automatic throttle control. Safety guard fully encloses belt and pulley. Operates for approximately 2 hours on full 3-quart gasoline tank.

SIZE: Measures 42x20x32 inches high overall.

ACCESSORIES: Air chuck, 15 ft. of 1/4-in. flexible air hose, how-to-power spray instructions.

ORDERING INFORMATION: Not for sale in Massachusetts.

30 HT 17557N—Shipping weight 178 pounds **\$599.99**

*SCFM=Standard Cubic Feet per Minute

**PSI=Pounds per Square Inch

Ideal unit for tire service trucks, lubrication trucks, utility vehicles. Provides dependable heavy-duty air power right on the job site. Operates our sandblaster and caulk gun, both sold on page 106.

DELIVERY RATE: 18.2 SCFM* at 175 PSI**.

AIR STORAGE TANK: 30-gallon tank meets ASME† code; cradle-mounted to reduce vibration. Air pressure gauge 0-300 pounds in 5-pound graduations.

COMPRESSOR, ENGINE: Two-stage compressor with centrifugal unloader; drain and service valves. Constant-speed head unloaders; pilot set at 160-175 PSI. Removable elements in intake filter silencer for ease of service. Multiple "V"-belt drive with belt guard. 10-HP, 4-cycle gasoline-powered engine with electric starter... requires 12-v. system; 12-ft. battery cables included. Pneumatic throttle control automatically slows engine during non-pumping cycle. 1 1/2-gallon fuel tank... runs up to 3 hrs. on one fill-up.

SIZE: Measures 39x23x40 inches wide.

ORDER INFO: See Stationary Compressor warranty on p. 104.

30 HT 17317N—Shipping weight 490 pounds **\$1299.99**

†ASME=Meets American Society of Engineers codes

Replacement Air Pumps

Increase or restore the original air power of your electric or gasoline powered air compressor with air pumps in sizes that deliver up to 175 PSI

Low as **\$59⁹⁹** model (1)

Single-stage pumps (1, 2, 3) for home, small shop. **2-stage pumps (4, 5)** for heavy-duty use.

PRESSURE, MOTOR REQUIREMENTS: Built to operate with motor running at 1725 rpm and HP as indicated in chart. Use chart to determine air pressure (PSI**) and delivered air (SCFM*) needed. 4 SCFM at 90 PSI will operate most air tools.

FLYWHEEL: Single stage pumps (1, 2, 3) have single-grooved "A" flywheel. Two-stage pumps (4 and 5) have double-grooved "A" section flywheels.

SPECIFICATIONS: As listed in chart at right.

Pump	Bore in.	Stroke inches	For Motor HP	For 40 PSI**		For 90 PSI**		For 125 PSI**		For 175 PSI**	
				Motor pulley (in.)	SCFM*	Motor pulley (in.)	SCFM*	Motor pulley (in.)	SCFM*	Motor pulley (in.)	SCFM*
(1)	2 1/4	1 1/4	1/2	4.0	1.6	3.5	1.0				
			3/4	5.7	2.3	5.0	1.5				
(2)	2 3/4	1 1/2	1 1/4	3.5	2.4	3.5	1.6				
			3/4	4.0	2.5	4.0	2.1				
			1	5.5	3.3	5.5	2.7				
(3)	2 3/4	2	1 1/2	3.5	6.2	3.5	4.9				
			1 1/4	4.0	7.1	4.0	5.6				
			2	4.25	7.6	4.25	6.0				
(4)	3 1/4	3	1 1/2	6.2	8.6	4.7	6.9	4.5	6.3	3.95	5.6
			2	6.95	9.9	6.2	8.9	6.0	8.3	5.3	7.4
(5)	4 3/4	2 1/4	3			4.6	13.6	4.2	12.7	3.1	10.0
			5			7.4	20.8	6.6	18.0	6.4	17.0

PUMP TYPES AND ORDERING INFORMATION:


(1) One-stage, 1-cyl. Air Pump
30HT17501C—Wt. 21 lbs. **\$59.99**

(2) One-stage, 1-cyl. Air Pump
30HT17503C—Wt. 22 lbs. **\$72.99**

(3) One-stage, 2-cyl. Air Pump
30HT17511L—Wt. 40 lbs. **\$99.99**

(4) Two-stage, 2-cyl. Air Pump.
Centrifugal unloader for no-load starts.
30HT17521N—Wt. 130 lbs. **\$344.99**

(5) Two-stage, 2-cyl. Air Pump.
Centrifugal unloader for no-load starts.
30HT17523N—Wt. 135 lbs. **\$374.99**

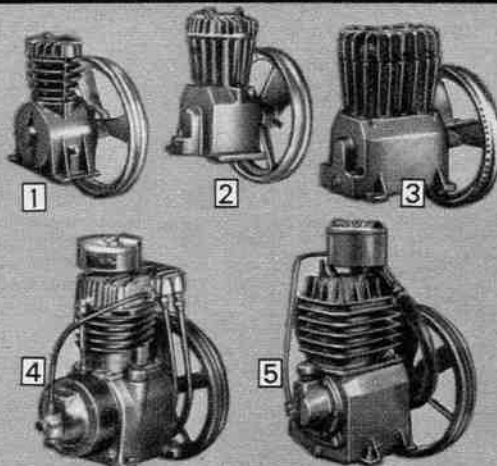



Grease automobiles... see below

Caulk windows... see below

Inflate tires... see page 107

Sandblast brick... see below

Sandblast rust

Inflate raft... see p. 107

Whatever the job... Your Air Compressor can do more with the accessories on this page thru page 108 and pages 111 thru 113

YOU CAN DO MORE..

Sandblasters

Heavy-duty, efficient cleaning of masonry, metal or wood using units below and ordinary sand



Gun with 100-lb. capacity hopper

With 8-in. diameter wheels for roll-about portability

\$63⁹⁹

Remove paint, dirt, rust and scale from castings, stone, ceramic, brick, concrete, metal, plastic, wood. Can be used to etch plastic, glass, metal, stone. Spray ordinary sand or liquid at high pressure.

PRESSURE REQUIREMENTS: Use with 1-HP compressor or greater.

GUN, SPRAY CONTROL: Non-bleeder type, siphon feed. $\frac{3}{32}$ -inch air jet, $\frac{3}{16}$ -inch ceramic nozzle, 15-foot hose. Operating instructions included.

HOPPER, ORDERING INFORMATION:

(1) Gun with 100-lb. capacity Hopper

Hopper mounted on 6-inch diameter, rubber-tired wheels for roll-about portability. Galvanized metal, 21x12-in. diameter.

30 HT 16814C—Shpg. wt. 18 lbs. **\$63.99**

(2) Gun with 50-lb. capacity Hopper

Polypropylene 17x9-in. diameter hopper with built-in sand screen and carrying handle.

Shipping weight 6 lbs. 10 oz. **\$53.99**

30 HT 16813 **\$53.99**

Ceramic Replacement Nozzle. $\frac{3}{16}$ -inch orifice. For (1) or (2) above only.

30 HT 16815—Shipping weight 2 ounces **\$9.29**



Gun with 1-qt. capacity canister

\$29⁹⁹

(3) Gun with 1-quart capacity Canister

Does similar jobs to units above, using lower horsepower compressors. Sprays sand only.

PRESSURE REQUIREMENTS: Use with compact or tank compressors, $\frac{1}{2}$ -HP or larger.

GUN, SPRAY CONTROL: Bleeder type, pressure feed. $\frac{3}{64}$ -in. air jet, $\frac{3}{64}$ -in. steel nozzle. Instructions included.

ORDERING INFORMATION:

30 HT 16801—Shipping weight 1 pound 12 oz. **\$29.99**

Replacement Nozzles. $\frac{3}{64}$ -in. orifice. For (3) only.

ORDERING INFORMATION:

30 HT 16805—Ceramic Nozzle. Wt. 2 oz. **\$8.29**

30 HT 16825—Steel Nozzle. Wt. 3 oz. **\$3.39**

(4) Protective Mask

Keeps out dried paint and dust. Non-toxic, non-allergenic polyethylene plastic. With disposable filter.

ORDERING INFORMATION:

30 HT 16351—Shipping weight 2 ounces **\$2.39**

Extra Filters. For mask above. Package of 2.

Shipping weight 1 ounce. **\$1.99**

30 HT 16361 **Pkg. 89c**



Paint Tank

Use with spray guns sold on page 108 and apply up to three gallons of paint on one filling

\$59⁴⁹

CAPACITY: Fill with up to 3 gallons of liquid paint, or insert 1-gallon can.

CONSTRUCTION: Rugged galvanized steel.

OPERATION: Pressure feed. Operates on maximum of 60 PSI**.

SIZE: 9 $\frac{3}{4}$ inch diameter, 21 $\frac{1}{2}$ inches high.

ACCESSORIES: Pressure regulator and safety valve. Order one air hose and one paint hose of same length (sold on facing page) to connect paint tank to spray gun.

ORDERING INFORMATION: Cannot be sold in Ark., N.J., Ore., or Puerto Rico in compliance with state laws.

30 HT 16105C—Shipping weight 26 lbs. **\$59.49**

Disposable Liners for Paint Tank above. (Not shown.)

Plastic. Ends the need for tank cleanup. Pkg. of 6.

30 HT 16107—Shipping weight 8 oz. **Pkg. \$3.09**



Air-powered Grease Gun

\$23⁹⁹

Air-powered Caulk Gun

\$13⁶⁹

Commercial-quality gun offers 1-hand operation.

CAPACITY: Uses 16-oz. bulk or dispenser; takes any 14 $\frac{1}{2}$ -oz. cartridge (sold in Big Book).

CONSTRUCTION: Safety lock prevents plunger and rod from releasing while loading. Size-O-Matic, Buna-N® rubber plunger pushes all grease in barrel forward. Automatically sizes itself for bulk, dispenser or cartridge operation... seals barrel or cartridge. Air-bleeder valve. E-Z vent valve releases air-lock. Snap-on coupler for easy hook-up to fittings.

PRESSURE REQUIREMENTS: Operates with air compressor (not incl.) of 30-150 PSI** range.

ORDER INFO: Wt. 6 lbs.

28 HT 4977 **\$23.99**

Great for insulation work on door and window frames or grouting tiles. Can also be used for dispensing adhesives and crack fillers. Delivers a uniform bead.

CAPACITY: Uses standard size 11-ounce caulk cartridge (sold in Big Book).

CONSTRUCTION: Gun with plastic body and pistol grip... allows user one-hand operation. Converts from bleeder to non-bleeder type. $\frac{1}{4}$ -in. metal connector for air hose (hose on facing page).

PRESSURE REQUIREMENTS: Operates on 20 PSI**... 70 PSI maximum. Use with compact or tank compressor, $\frac{1}{10}$ -HP or larger.

ORDERING INFO: Shpg. wt. 1 lb. 14 oz.

30 HT 16306... **\$13.69**

**Pounds per Square Inch



Portable Steel Air Tanks

Low \$2649 3 1/2-gal.

Simply fill portable tank using air compressor at home, shop or service station; carry pressurized air for inflating tires, etc. and other air operations.

WORKING PRESSURE: 150 PSI* maximum. Recommended operating pressure is 85-125 PSI.


ACCESSORIES: Includes air distribution valve and pressure gauge, 4 feet of 1/4-in. hose with built-in air chuck, carrying handle and stand.

SIZES, ORDERING INFORMATION: Cannot be sold in Arkansas, New Jersey, Oregon, Massachusetts or Puerto Rico in compliance with local laws.

3 1/2-gallon capacity
Overall measurements for the unit are 8 3/4 x 10 1/2 x 18 inches long.
Shipping weight 16 pounds.
30 HT 16125C \$26.49

9 gallon capacity
Overall measurements for the unit are 12 1/2 x 14 1/2 x 22 1/2 inches long.
Shipping weight 29 pounds.
30 HT 16124C \$34.49

Shut-off Valves



(1 thru 3) Control air flow through pipes and hoses


(1) Tank Shut-off Globe Valve
Made of forged brass, 3/8-inch diameter fittings.
ORDERING INFORMATION:
Shipping weight 6 ounces.
30 HT 16257 \$4.29

(2) Ball Valves
Made of heavy-duty cast bronze. Rated 400 PSI* for water, gas, oil or air applications.
SIZES, ORDERING INFORMATION:

1/4-inch thread
30 HT 16293—Wt. 4 oz. \$5.69
1/2-inch thread
Shipping weight 4 ounces.
30 HT 16294 \$5.99

3/4-inch thread
Shipping weight 7 ounces.
30 HT 16295 \$7.69

(3) Tank Drain Valve
Brass. With 1/2-in. diameter fittings.
ORDERING INFORMATION:
Shipping weight 2 ounces
30 HT 16253 \$1.09

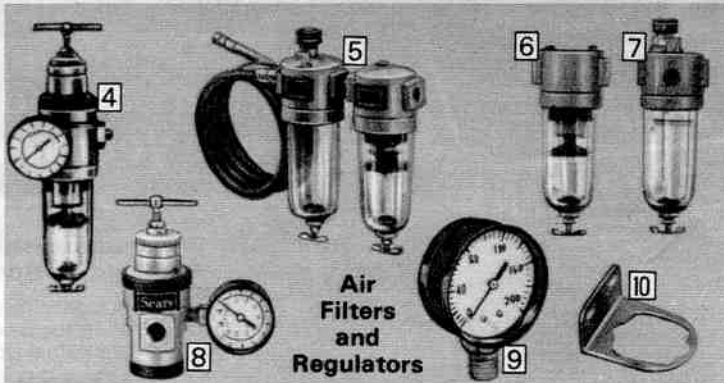

Air Filters and Regulators

(4 thru 8) Threaded 3/8-inch inlet and outlet ports with two extra 1/4-inch reducing bushings for use with 1/4-inch air hose fittings.
ORDERING INFORMATION:

(4) Air Filter and Regulator with Gauge. Filters out oil, water, dust before entering gun. For air lines delivering up to 150 PSI*. Regulates air pressure 5 to 175 PSI.
30HT16023—Wt. 2 lbs. 5 oz. \$21.49

(5) Portable Air Filter and Oil Fog Lubricator Kit. Save \$2.78. Separate prices total \$31.77. Includes (6), (7), below, and Portable Accessory Kit at right. Unit mounts on user's belt for combination air filtering and tool lubrication. Can be used separately.
30HT16013—Wt. 7 lbs. .Kit \$28.99

Portable Air Line Filter Kit. Save \$1.89. Sep. prices total \$17.88. As (5) above except without lubricator (7).
30HT16014—Wt. 3 lbs. .Kit \$15.99

Portable Oil Fog Lubricator Kit. Save \$1.89. Sep. prices total \$19.88. As (5) above except without (6).
Shipping weight 7 lbs. 9 oz.
30 HT 16015 Kit \$17.99

(6) Air Line Filter. Removes moisture and dirt; helps protect air tools from rust, wear. For professional results with oil base paint, lacquers.
30HT16009—Wt. 1 lb. 6 oz. . \$11.89

(7) Oil Fog Lubricator. Lubricates air tools; helps prevent friction damage and extends the life of air tools. Not for use with spray guns.
30 HT 16017—Wt. 1 lb. 10 oz. \$13.89

Portable Accessory Kit. (Not shown). For mounting (6) or (7) on belt. Includes air hose assembly with 5-feet of 1/4-inch hose, one 1/4-inch and one 3/8-inch double male connector and universal belt hook.
30 HT 16011—Wt. 1 lb. .Kit \$5.99


(8) Heavy-duty Pressure Regulator and Gauge. Maximum input is 300 PSI*; maximum output is 125 PSI. Air pressure gauge is included.
Shipping weight 1 lb. 12 oz.
30 HT 16036 \$10.89

(9) Pressure Gauge. For air, water or oil. Readings up to 200 PSI*. 1/4-inch male thread.
ORDERING INFORMATION:
30 G 16042—Shpg. wt. 3 oz. . \$2.99

(10) Wall Bracket. Attaches (4), (6), (7) or (8) to wall.
ORDERING INFORMATION:
Shipping weight 4 ounces.
30 HT 16019 \$1.99

*PSI=Pounds per Square Inch

Sears Has a Credit Plan to Suit Most Every Need
See Big Book or ask for details

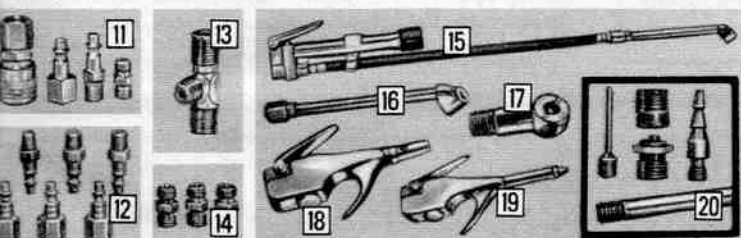

(11 thru 14) Connectors

(11) Quick Connector Sets. Steel. 4-piece sets for male, female couplings. For use with air only.
SIZES, ORDER INFO:

1/4-inch. Shpg. wt. 7 oz.
30HT16244 Set \$2.99
3/4-inch. Shpg. wt. 9 oz.
30HT16246 Set \$3.29

(12) 1/4-inch Female/Male Stud Set. Use with (11). With 3 females and 3 male studs.
ORDERING INFO: Wt. 6 oz.
30HT16247 Set \$1.99

(13) Tee Adapter. Brass. Operate 2 spray guns.
ORDERING INFO:
30HT16217—Wt. 2 oz. \$2.99

(14) Double Male Couplings. Brass. Use to connect hoses. Package of 3.
SIZES, ORDERING INFO:
1/4-in. For air only. Wt. 2 oz.
30HT16281 Pkg. \$1.29
3/4-in. For air or paint.
Shipping weight 4 oz.
30HT16291 Pkg. \$1.69

(15 thru 20) Inflators and Blow Guns

(15) Long Air Chuck and Gauge. Indicator reads 10 to 120 PSI*. 15-in. hose. 6-in. chuck. Turns 360°. 1/4-in. female thread.
ORDERING INFORMATION:
30 HT 16311—Shpg. wt. 1 lb. 8 oz. \$13.99

(16) Dual Tire Air Chuck. 1/4-in. female thread.
ORDERING INFORMATION:
30 HT 16272—Shipping weight 5 oz. \$2.59

(17) Brass Air Chuck.
ORDERING INFO: Shpg. wt. 3 oz. each.
30 HT 16269—1/4-inch male thread. . . Ea. \$1.09
30 HT 16271—1/4-inch female thread. . . Ea. 1.09

(18) Professional-type Blow Gun. Meets OSHA (Occupational Safety and Health Act) requirements. Outlet pressure drops to less than 30 PSI* when dead-ended. Lever action. Round tip. Max. inlet pressure: 135 PSI. 1/4-in. female thread.
ORDERING INFORMATION:
30 HT 16236—Shipping weight 7 oz. \$3.69

(19) Heavy-duty Blow Gun. Easy control lever. Round tip. 1/4-in. female thread.
ORDERING INFORMATION:
30 HT 16232—Shipping weight 9 oz. \$3.19

(20) Inflator Kit. Use with any of our compressors. With inflator needle, inflator, air duster, tire inflator and adapter. Attach to the end of air hose.
ORDERING INFORMATION:
30 HT 16276—Shipping weight 1 oz. .Kit \$3.29

Air and Paint hoses . . . extend your range from compressor to work project without extension cords

(21) Flexible Air and Paint Hose

Use instead of extension cord to reach projects to avoid possibility of voltage drop and subsequent motor burnout. Lightweight, flexible hose of oil-resisting vinyl tube with nylon braid cover and orange latex coating. 200 PSI* working pressure; 800 PSI bursting strength. With 1/4-inch female swivel connectors on both ends.

TYPES, SIZES, ORDERING INFORMATION:

Inside diameter	Length	Catalog Number	Shpg. wt.		Price
			lbs.	oz.	
Air Hose only					
1/4-in.	15 ft.	30 HT 16182		10	\$7.49
1/4-in.	25 ft.	30 HT 16186	1		11.79
3/8-in.	25 ft.	30 HT 16172	1	9	13.79
3/8-in.	50 ft.	30 HT 16176	3		18.79
3/8-in.	15 ft.	30 HT 16182	1	7	9.79
Air or Paint Hose					
3/8-in.	15 ft.	30 HT 16191	2	2	9.79
3/8-in.	25 ft.	30 HT 16201	3	7	11.99
Paint and Lacquer Hose only					
3/8-in.	15 ft.	30 HT 16211	3	5	17.99

(22) Coiled Nylon Air Hose

Resists oil, grease, rotting. Retains flexibility—coils automatically when stored. Extends to 25 feet. Working pressure of 200 PSI*; 800 PSI bursting strength. 1/4-inch female fittings on each end.


SIZES, ORDERING INFORMATION:
Shipping weight 2 pounds.
30 HT 16221—1/4-inch diameter hose \$11.49
30 HT 16223—3/8-inch diameter hose 16.49

(23) Hose Repair Kit

For 1/4-inch diameter hose. Includes one female fitting, one splicer and three clamps.

ORDERING INFORMATION:
Shipping weight 3 ounces.
30 HT 16302 Kit \$1.49

*PSI=Pounds per Square Inch

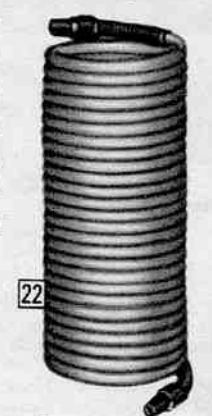

Whatever the job... your air compressor can do more with accessories below and on pages 106, 107, 111 through 113

YOU CAN DO MORE...

CRAFTSMAN Spray Guns

...all backed by our one year warranty

FULL ONE YEAR WARRANTY ON CRAFTSMAN SPRAY GUNS:

If this Craftsman Spray Gun fails due to a defect in material or workmanship within one year from date of purchase, return it to the nearest Sears Store throughout the United States, and Sears will repair it, free of charge. This warranty gives you specific legal rights and you may also have other rights, which vary from state to state.



Our finest professional-quality production-type Spray Gun

External mix, siphon feed to give painting results required in fine automotive or industrial type finishing

\$94.99

Designed for professional use. Handles a wide range of painting materials including stains, acrylics, lacquers, primers, even newer automotive metallics and custom-type paint finishes

PRESSURE REQUIREMENTS: For 2-HP compressors or larger delivering at least 8.3 SCFM* at 40 PSI**. Order low air consumption cap below to use gun with compressors as small as 1/4 HP.

HEAD, SPRAY CONTROL: Aluminum. Non-bleeder type, external mix, siphon feed. Stainless steel fluid needle. Sensitive fluid and fan controls offer a wide variety of precise spray patterns.

CUP: Aluminum. 1-quart, 2-prong quick release. Wide mouth for easy cleaning and filling.

ORDERING INFO: See warranty above.

Shipping wt. 3 lbs. 4 oz.

30 HT 15634 \$94.99

Replacement Gasket

(Not shown). For spray gun above only

ORDERING INFORMATION:

30 HT 15963—Shpg. wt. 1 oz. \$5.69

Low Air Consumption Cap

(Not shown). Lets you use spray gun above with 1/4 to 1 1/2-HP compressors.

ORDERING INFORMATION:

30 HT 16431—Shpg. wt. 3 oz. ... \$14.49

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details



Professional-quality Spray Gun

External mix, siphon feed or pressure feed for large jobs

\$57.99

PRESSURE REQUIREMENTS: For 1-HP compressors or larger delivering 6.4 or more SCFM* at 40 PSI**.

HEAD, SPRAY CONTROL: Aluminum. Bleeder/non-bleeder type, external mix. Siphon to pressure feed. Stainless steel fluid needle. Sensitive fluid and fan controls.

CUP: Aluminum. Drip-free design. 1-quart; screw-on type.

ORDER INFO: See warranty above. Shpg. wt. 2 lbs. 13 oz.

30 HT 15624 \$57.99

Replacement Gasket. (Not shown). For professional quality gun sold above only.

ORDER INFO: Wt. 1 oz.

30 HT 15964 \$5.29

Viscosimeter. Use to measure thickness of paint. Plastic.

30 HT 16393—Shipping weight 2 ounces \$2.39

*SCFM = Standard Cubic Feet per Minute **PSI = Pounds per Sq. In.



\$2.39



General-purpose Spray Gun

Internal/external mix, pressure or siphon feed

\$33.99

PRESSURE REQ.: For compressors 1/2-HP or greater delivering 3 or more SCFM* at 40 PSI**.

HEAD, SPRAY CONTROL: Alum., epoxy fin. Fluid, fan controls. Bleeder/non-bleeder type; conv. from internal to external mix, pressure to siphon feed.

CUP: Aluminum. 1-quart screw-on type.

ORDER INFO: Warranty above. Wt. 3 lbs. 1 oz.

30 HT 15712 \$33.99

Replacement Gasket. (Not shown). For gun above only.

ORDER INFO: Wt. 1 oz.

30 HT 15959 \$3.89

Versatile Air Brush Sets

Choose models for professional-type work and/or hobby projects... do the five operations shown at right, and more



Scenic designs



Automotive stripping



Artistic painting



Commercial art



Model finishing



Pro-style Air Brush Set

Double action spray pattern adjusts from 1/16 to 1 1/4 in. **\$72.99**

Sprays enamels, paint, lacquers, dopes. Requires 15 to 50 PSI**, normal operating pressure is 30 PSI. Sprays as narrow as 1/16 inch... ideal for fine line detailing and scenic designs on vans and automobiles.

SPRAY CONTROL: Fingertip control, double-action air brush. Internal mix for thorough paint atomization. Spray pattern adjusts from 1/16 to 1 1/4 inches wide. Adjusting screw sets and holds pattern width.

COMPONENTS: Air brush, two paint tips... one tip for fine detailing, one tip for heavy-viscosity materials for faster spray, heavier coverage. Two air caps. 8 ft. of heavy-duty braided hose. Operates on regulated air supply; 1/4-in. NPT adapter for compressor use included. Not for use with propellant sold at right. One 2 oz. paint jar, two 3/4 oz. jars, one metal paint cup and operating instructions included.

ORDERING INFORMATION:

30 HT 15508—Shipping weight 2 pounds 8 ounces Set \$72.99



Hobby Air Brush Set

Our most popular set... spray pattern adjusts from 1/8 to 1 1/2 inches wide **\$33.99**

(1 and 2) **Hobby and Mini-Spray Gun Sets.** Spray enamels, paint, lacquers, dopes. Require 15 to 50 PSI**, normal operating pressure is 30 PSI.

COMPONENTS: Single-action air brush. 8-ft. vinyl hose, 1/4-in. NPT adapter for compressor use; also has on/off valve for using propellant sold below. Instr. incl.

(1) Hobby Air Brush Set

Our most popular air brush set. Does fine detailing, scenic designs as well as large overall coverage work.

SPRAY CONTROL: Professional-type internal mix for thorough paint atomization. Pattern adjusts from 1/8 inch to 1 1/4 inches wide. With four 3/4 oz. jars.

ORDERING INFORMATION:

Shipping weight 2 pounds.

30 HT 15504 Set \$33.99



Mini-Spray Gun Set

\$9.49

(2) **Mini-Spray Gun Set** For large, overall coverage work.

SPRAY CONTROL: External mix. Pattern adjusts 3/4 to 2 inches wide. One 4-oz. jar.

ORDERING INFORMATION:

30 HT 15502—Wt. 2 lbs. Set \$9.49

(3) **Propellant.** Use with (1 and 2) only.

Two 11-oz. cans. Not for sale in Ore.

ORDER INFO: Wt. 2 lbs. 8 oz.

30 HT 15509 Pack \$5.99

Airless Electric Sprayers apply liquids amazingly fast with minimal overspray... even spray most latex paints *unthinned*

FULL SIX MONTH WARRANTY ON AIRLESS SPRAYER

If this Airless Sprayer fails due to a defect in material or workmanship within six months from the date of purchase, return it to the nearest Sears store throughout the United States, and Sears will repair it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

ADDITIONAL WARRANTY NOTE FOR 30 HT 15558

If this Airless Sprayer is used for commercial or rental purposes the warranty will apply for thirty days from the date of purchase.



\$99⁹⁹

High-speed Homeowner Airless Spray Gun

Speeds painting of shutters, ceilings... sprays most stains, varnishes, enamel and latex paint

Comfortably fits the hand... weighs less than 4 pounds unfilled. Use indoors or outdoors with little overspray... more paint reaches surface to be covered, less escapes to surrounding areas so there's less time spent on pre-painting masking or after-painting clean-up. Sprays lacquers, stains and varnishes... most latex paints unthinned.

SPRAY RATE: Up to 10 1/4 oz. per minute.

MOTOR: Electromagnetic linear motor.

SPRAY GUN: Single control knob adjusts spray pattern. Working parts of tungsten carbide and hardened chrome steel .7mm nozzle with guard. Housing and handle of plastic that is highly resistant to organic solvents and humidity. One-quart liquid reservoir. Spraying and use instruction included.

SIZE: Measures 8 1/4 x 5 9/16 inches high.

ELECTRICAL INFORMATION: UL listed. 110-120 volt, 60-Hertz, AC. 85 watts, 1.9 amps. 6-ft., 3-wire cord.

ORDERING INFORMATION: See warranty above.

30 HT 15528—Shipping weight 4 pounds.....\$99.99

Accessories for High-speed Homeowner Airless Sprayer sold above



(1) Flexible Extension Nozzle. Use to spray ceilings and other hard-to-reach areas. 0.7mm nozzle with guard... accepts other nozzles below.

ORDERING INFORMATION:

30 HT 16318—Shipping weight 2 ounces.....\$10.99

Additional Accessories. (Not shown).

ORDERING INFORMATION:

Fan Nozzle. Tungsten carbide. Sprays in a fan pattern.

30 HT 16318—Shipping weight 3 ounces.....\$21.89

.4 mm Nozzle. For lacquers, varnishes and stains.

30 HT 16324—Shipping weight 1 ounce.....\$6.99

.6 mm Nozzle. For enamels, oil base primers.

30 HT 16326—Shipping weight 1 ounce.....\$6.99

.7 mm Nozzle. For general purpose spraying using a variety of materials.

30 HT 16327—Shipping weight 1 ounce.....\$6.99

.8 mm Nozzle. For spraying latex paints and other heavy viscosity materials.

30 HT 16328—Shipping weight 1 ounce.....\$6.99

5-ft. Suction Tube. Ends cup filling step. Lets you spray directly from large container. Plastic.

30 HT 16315—Shipping weight 4 ounces.....\$10.99

Valve Replacement Kit. Includes 2 valves.

30 HT 16319—Shipping weight 1 ounce....Kit \$2.99

High-speed Airless Sprayer Outfit


Sprays at a rate up to 4 times faster than conventional sprayer compressors... delivers up to 1/3 gallon of liquid per minute

\$744⁹⁹

Ideal for commercial housepainting

- Hose and spray gun meet OSHA** requirements
- Motor is CSA† and UL listed

With features and available accessories that make most any painting job easier



Sprayer comes complete with gun, .015-in. tip and 25-ft. hose that lets you paint an entire room without having to move sprayer or paint

Order mini-pole and whip hose extension (both sold at right) to paint ceilings and other hard to reach areas

Use washer kit (sold below) to wash cars, trucks, lawn mowers, garden and farm equipment, exterior walls

High-speed Sprayer Outfit

Use indoors or outdoors. Minimal or little over-spray... means more paint reaches surface to be covered, less escapes to surrounding areas so there's less time spent on pre-painting masking or after-painting clean-up. Sprays enamels, lacquers, stains, varnishes and most latex paints unthinned. No-mess filling container... suction element extends below unit to insert directly into paint can or bucket. Single control knob for pressure adjustment... prevents surge in spray pattern.

SPRAY RATE: Up to 1/3 gallon (42 ounces) of liquid per minute at pressures up to 3300 PSI.*

MOTOR: Explosion-proof 1/3-HP electric motor.

SPRAY GUN: Working parts of tungsten carbide. Filter traps dirt to prevent tip clogging. Safety lock and diffuser; nozzle and trigger guards. Gun and hose meet OSHA** requirements.

SIZE: Measures 21 1/4 x 13 x 28 in. high.

ACCESSORIES: Paint pump, stand, gun swivel, 2 filters, one .015 tip, 25-ft. of 1/4-in. spray hose (can be used with up to 200 feet of hose), tool kit and operating manual. Additional accessories sold at right.

ELECTRICAL INFORMATION: UL and CSA† listed. 110-120-volt, 60-Hertz AC. With 6-foot, 3-wire cord. Unit uses 465 watts at maximum pressure. 20-amp slow blow fuse.

ORDERING INFORMATION: Not for use as a compressor. Partly assembled. See warranty above.

Shipping weight 80 pounds.

30 HT 15558N.....\$744.99

*PSI=Pounds per Square Inch

**OSHA=Occupation Safety and Health Act

†CSA=Canadian Standards Association

Accessories for Sprayer Outfit above

All accessories except (2) are not shown.

(2) 12-in. Mini-pole

For hard-to-reach areas like ceilings, corners.

ORDERING INFORMATION:

30 HT 16212—Shipping weight 5 ounces....\$17.49

High-pressure Washer Kit. Sprays detergent at 500 PSI* for washing exterior walls, cars. Incl. Mini-pole (2) sold above and .025-in. diam. stainless steel tip.

ORDERING INFORMATION:

30 HT 16218—Shipping weight 5 ounces....\$20.49

5-ft. Whip hose Extension

Fits between existing hose and gun on unit above for increased flexibility, easier handling.

ORDERING INFORMATION:

30 HT 16216—Shipping weight 5 ounces....\$10.99

Additional High-pressure Spray Hose. For High-speed Airless Sprayer Outfit above only. Flexible, 1/4-inch nylon hose with ground wire. Connectors sold separately below.

LENGTHS, ORDERING INFORMATION:

30 HT 16213—25-ft. length. Wt. 2 lbs.\$29.99

30 HT 16214—50-ft. length. Wt. 4 lbs. 8 oz.\$7.99

High-pressure Hose Connection Nipple

Steel, 1/4 inch. Use to join lengths of high-pressure hose sold above.

ORDERING INFORMATION:

30 HT 16215—Shipping weight 2 ounces....\$1.39

Airless Tips for spraying various materials

SIZES, USES, ORDERING INFORMATION:

.011 in. diameter. For lacquers and stains.

30 HT 16203—Shipping weight 3 ounces....\$24.99

.013 in. diameter. For primers, oil base paints.

30 HT 16204—Shipping weight 3 ounces....\$24.99

.015 in. diameter. For latex base paints.

30 HT 16205—Shipping weight 3 ounces....\$24.99

CRAFTSMAN® Electric Impact Wrenches... just plug them in — work anywhere there's electricity

FULL ONE YEAR WARRANTY ON CRAFTSMAN ELECTRIC IMPACT WRENCHES. If any Craftsman Electric Impact Wrench fails to give complete satisfaction within one year from date of purchase, return it to the nearest Sears store throughout the U.S., and Sears will replace it, free of charge. If the Impact Wrench is used for commercial or rental purposes, this warranty applies for only 90 days from date of purchase. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.



Impact Wrench alone
\$89.50

Save \$10
Buy Impact Wrench with
Chuck (2) and Case (3)

Sep. prices
tot. \$115.48
\$105.48

(1) Variable-torque Wrench

MOTOR AND TORQUE: Motor develops maximum 1/2-HP with no-load speed of 1750 rpm with two impacts per revolution. Delivers up to 100 foot-pounds of torque. Trigger control lets you choose the right torque for the job. Reversible... removes fasteners. Permanently lubricated ball and roller bearings. Motor brushes are easily accessible.

HOUSING: Thermoset polyester motor housing, aluminum gear housing. 12 1/2 in. long. Polymer handle, end cover. Slide switch reverses rotation of impact. Removable handle for 2-hand control. Rubber boot helps protect against scuffing surfaces.

ELECTRICAL INFO: Double-insulated. 6-ft., 2-wire neoprene cord. Operates on 110-120-volt, 60-Hz. AC. 480 input watts. UL listed.

ORDER INFO: See warranty above.
9 HT 1830—Wt. 7 lbs. 7 oz. \$89.50

Wrench (1) with Chuck (2) and Perma-nex® plastic Case (3)

ORDER INFO: See warranty above.
Shpg. wt. 12 lbs. 12 oz.
9 HT 18303.....Kit \$105.48

Single-speed Wrench. (Not shown.) Like (1) above, but without variable speed. To reach lower torques, operate trigger intermittently. Develops maximum 1/4-HP.

ORDER INFO: See warranty above.
9 HT 1886—Wt. 9 lbs. \$79.50

(2) Chuck for Wrenches above

Converts 1/2-in. sq. drive electric wrench to drill. Grips 1/4 to 1/2-in. diameter bits, 1/2-in. sq. drive. Drill wood, metal.

ORDERING INFORMATION:
9 HT 2253—Wt. 1 lb. 7 oz. \$15.99

(3) Perma-nex® plastic Case for Wrenches above. Measures 16x13 1/2x5 inches high.

ORDERING INFORMATION:
9 HT 1456—Wt. 3 lbs. 14 oz. \$9.99

MOTOR AND TORQUE: Motor develops maximum 1/2-HP with no-load speed of 1700 rpm with 2 impacts per revolution. Delivers up to 40 ft.-lbs. of torque. Trigger control lets you choose the right torque for the job. Reversible... removes fasteners. Sleeve bearing construction. Motor brushes are easily accessible for maintenance.

HOUSING: Polymer motor housing. Measures 11 inches long. Slide switch reverses rotation of impact. Removable handle for two-hand control.

ELECTRICAL INFORMATION: Double-insulated. 6-foot, 2-wire neoprene cord. Operates on 110-120-volt, 60-Hz. AC. 384 full-load input watts. UL listed.

ORDERING INFORMATION: See warranty above.
9 HT 1813—Wt. 6 lbs. \$59.50



Sockets, Accessories, and Replacement Parts for Air-Drive Wrenches sold on facing page

CONSTR.: Molybdenum alloy steel, black-oxide finish. 6-pt. openings.

(4) CRAFTSMAN 11-piece 1/2-inch square drive Impact Socket Set. Ten 6-point sockets (3/16 thru 1-inch); metal tray.

ORDER INFO: Warranty p. 101.
9HT44019—Wt. 3 lbs. 12 oz. .Set \$22.99

(5) CRAFTSMAN 7-pc. 3/4-in. sq. drive Impact Socket Set. Seven 6-pt. sockets (5/16 thru 1 1/16-inch).

ORDER INFO: Warranty p. 101.
9HT44013—Shpg. wt. 12 oz. .Set \$13.99

Individual Sockets

Catalog Number	Size	Shpg. wt. lbs. oz.	Each
CRAFTSMAN Individual 1/2-in. drive Sockets			
9 HT 47571	3/16-in.	3	\$2.39
9 HT 47572	1/8-in.	3	2.39
9 HT 47573	7/16-in.	3	2.39
9 HT 47574	1/2-in.	3	2.39
9 HT 47575	5/8-in.	4	2.39
9 HT 47576	3/4-in.	4	2.39
9 HT 47577	1 1/16-in.	4	2.39
9 HT 44313	19mm.	5	2.29

Individual 3/4-in. drive Sockets			
9 HT 44001	7/16-in.	5	2.49
9 HT 44002	1/2-in.	5	2.49
9 HT 44003	5/8-in.	6	2.59
9 HT 44004	3/4-in.	6	2.59
9 HT 44005	1 1/16-in.	7	2.59
9 HT 44006	3/4-in.	6	2.69
9 HT 44007	1 1/8-in.	7	2.69
9 HT 44008	7/8-in.	8	2.69
9 HT 44009	1 1/2-in.	10	2.89
9 HT 44011	1-in.	11	2.99
9 HT 47968	1 1/8-in.	(10)	3.90
9 HT 47564	19mm.	6	2.59
9 HT 47565	20mm.	7	2.69
9 HT 47566	21mm.	7	2.69

Indiv. 1-in. drive Sockets (Not Craftsman)			
9 HT 47952	3/4-in.	(13)	5.00
9 HT 47953	1 1/8-in.	(13)	5.00
9 HT 47954	7/8-in.	(1)	5.00
9 HT 47955	1 1/8-in.	(14)	5.00
9 HT 47956	1-in.	(14)	5.00
9 HT 47957	1 1/8-in.	(1)	5.80
9 HT 47958	1 1/8-in.	(1)	6.00
9 HT 47959	1 1/8-in.	(2)	6.60
9 HT 47961	1 1/4-in.	(2)	7.25
9 HT 47962	1 1/8-in.	(2)	7.60
9 HT 47963	1 1/8-in.	(2)	8.00
9 HT 47964	1 1/8-in.	(2)	8.15
9 HT 47965	1 1/2-in.	(2)	8.25

Indiv. 1-in. drive Sockets (Not Craftsman)			
9 HT 47915	3/4-in.	(1)	\$8.40
9 HT 47916	1 1/8-in.	(1)	8.40
9 HT 47917	7/8-in.	(1)	8.40
9 HT 47918	1 1/8-in.	(1)	8.40
9 HT 47919	1-in.	(2)	8.40
9 HT 47921	1 1/8-in.	(2)	8.40
9 HT 47922	1 1/8-in.	(2)	8.50
9 HT 47923	1 1/8-in.	(2)	8.50
9 HT 47924	1 1/4-in.	(2)	8.60
9 HT 47925	1 1/8-in.	(2)	8.80
9 HT 47926	1 1/8-in.	(2)	8.80
9 HT 47927	1 1/8-in.	(2)	9.00
9 HT 47928	1 1/8-in.	(2)	9.75
9 HT 47929	1 1/8-in.	(2)	10.00
9 HT 47931	1 1/8-in.	(2)	10.00
9 HT 47932	1 1/8-in.	(3)	12.00
9 HT 47933	1 1/8-in.	(3)	12.00
9 HT 47934	1 1/8-in.	(3)	12.60
9 HT 47935	1 1/8-in.	(3)	13.65
9 HT 47936	1 1/8-in.	(3)	14.20
9 HT 47937	2-in.	(3)	16.40
9 HT 47938	2 1/8-in.	(3)	16.85
9 HT 47939	2 1/8-in.	(4)	19.30
9 HT 47941	2 1/8-in.	(4)	20.00
9 HT 47942	2 1/8-in.	(4)	20.00
9 HT 47943	2 1/8-in.	(4)	21.65
9 HT 47944	2 1/8-in.	(4)	26.25
9 HT 47945	2 1/8-in.	(4)	28.70
9 HT 47946	2 1/2-in.	(4)	33.00

(6) CRAFTSMAN Impact Adapter

Converts 1/2-in. drive to 3/8-in.
ORDER INFO: Warranty p. 113.
9 HT 44124—Shpg. wt. 5 oz. \$2.39

SHIPPING NOTE: "F" items (as 9 HT 47968) sent postpaid (except to Alaska and Hawaii) from Barborton, Ohio.

(7) 1/2-in. sq. drive Double-end Socket. 6-pt., 3/4-in. opening at one end; 6-pt., 1 1/16-in. opening at other. For 1/2-in. sq. drive impact tools with extended shank (as 9 HT 18892). For short shank tools (as 9 HT 18882).

ORDER INFO: Use with (11) below.
9 HT 4410—Shpg. wt. 9 oz. ...\$3.69

(8) "O" Rings.

Use with pins below to help secure sockets on wrenches with pin-retainer spindles.

SIZES, ORDERING INFO:

For 3/4-inch square drive sockets (3/4 thru 1 1/8-in.).

9 HT 47949—(Wt. 1 oz.) 50c

For 1-inch square drive sockets (3/4 thru 1 1/16-in.).

9 HT 47912—(Wt. 1 oz.) 50c

For 1-inch square drive sockets (1 1/4 thru 2 1/8-in.).

9 HT 47913—(Wt. 1 oz.) 60c

For 3/4-inch square drive sockets (1 1/8 thru 1 1/2-in.).

9 HT 47951—(Wt. 1 oz.) 50c

(9) Pins.

Use with "O"-rings above to help secure sockets on wrenches with pin-retainer spindles.

SIZES, ORDERING INFO:

For all 3/4-inch square drive impact sockets.

9 HT 47948—(Wt. 1 oz.) 30c

For 1-inch square drive impact sockets (3/4 thru 1 1/16-in.).

9 HT 47911—(Wt. 2 oz.) 30c

For 1-inch square drive impact sockets (1 1/4 thru 2 1/8-in.).

9 HT 47914—(Wt. 2 oz.) 30c

(10) CRAFTSMAN Universal Joints. Molybdenum alloy steel with black-oxide finish.

SIZES, ORDERING INFO:

Catalog Number	Drive size	Shipping weight	Each
9 HT 44123	3/8-in.	4 oz.	\$5.19
9 HT 44125	1/2-in.	8 oz.	5.39

(11) Extensions. Molybdenum alloy steel, black-oxide finish.

SIZES, ORDERING INFO:

Catalog Number	Drive size	Size in. lbs. oz.	Each
9 HT 4477	1/2	6 ... 12	\$4.29
9 HT 47966	3/4	7 (2) ... 14.00	
9 HT 47967	1	7 (4) ... 21.60	

(12) CRAFTSMAN Angle-head Attachments. Cast-alum.

For wrenches 9 HT 18835, 9 HT 18882, 9 HT 1888 and former 9-18883.

ORDER INFO: Warranty p. 113.
9 HT 18891—Wt. 2 lbs. 5 oz. \$79.99

(13) CRAFTSMAN Impact Chuck. Converts 1/2-inch square drive air impact wrench to drill.

Grips 1/4 to 1/2-inch diameter bits. Drill wood, metal.

ORDER INFO: Warranty p. 113.
9 HT 2253—Wt. 1 lb. 7 oz. ...\$15.99

(14) CRAFTSMAN Screwdriver Chuck and Bits. 1/2-in. sq. drive. No. 2 Phillips, Nos. 12-14, 14-16 flat bits with finders. Steel.

ORDER INFO: Warranty p. 101.
9HT18867-Wt.1lb.3oz. .Set\$24.99

CRAFTSMAN® Pneumatic (Air-drive) Impact Wrenches run cooler, last longer, and are lighter than the electrics

YOU CAN DO MORE...

Match your
Air-drive Tool
with proper
compressor,
sold on pages
104 and 105

Your Compressor can do more
with this wide selection
of Air-drive Tools

1/2-INCH SQ. DRIVE



Both kits
include cover

Delivers 150 to 200 ft.-lbs.
of torque

Kit **\$109⁹⁵** | Wrench alone **\$79⁹⁹**

Delivers 175 to 240 ft.-lbs.
of torque

Kit **\$159⁹⁵** | Wrench alone **\$129⁹⁵**

SPINDLE: Ring-retainer type.
TORQUE: Working range: 150 ft.-lbs.; Ultimate: 200 ft.-lbs. Trigger control lets you adjust torque to job. Reversible.
HOUSING: Cast-aluminum with rubber scuff-guard on nose. Measures 6 1/4 inches long.
AIR INTAKE: Air inlet: 1/4-inch pipe thread.
ACCESSORIES: 8 sockets (7/16 thru 1/2-inch); cushion cover; Permanex® polyethylene case.
ORDER INFO: See warranty page 113. See chart at left for air requirements to order proper compressor. Wt. 10 lbs. 5 oz.
9 HT 18942.....Kit \$109.95

Wrench alone. Imported from United Kingdom and Japan.
ORDERING INFORMATION:
9 HT 18882—Wt. 6 lbs. 2 oz. \$79.99

Protective Cushion Cover alone.
ORDERING INFORMATION:
9 HT 18921—Shpg. wt. 8 oz. \$3.95

SPINDLE: Ring-retainer type.
TORQUE: Working range: 175 ft.-lbs.; Ultimate: 240 ft.-lbs. Trigger controls torque. Reversible.
HOUSING: Cast-aluminum. Rubber scuff-guards on nose and heel. 7 3/4 in. long overall.
AIR INTAKE: Air inlet: 1/4-in. pipe thread.
ACCESSORIES: 8 sockets (7/16 thru 1/2-in.); cover; Permanex® polyethylene case.
ORDER INFO: See warranty p. 113. See chart below for air requirements to order proper compressor.
9 HT 18943—Wt. 10 lbs. 8 oz.Kit \$159.95
Wrench alone.
9 HT 18835—Wt. 6 lbs. 12 oz. 129.95
Wrench with 2-inch extended shank.
9 HT 18892—Wt. 7 lbs. 5 oz. 134.95
Protective Cushion Cover alone.
9 HT 18922—Shpg. wt. 8 oz. 3.95

Minimum air requirements for tools on this page

Catalog Number	Working SCFM	PSI	Hose Size	Tank Size
9 HT 18835	4 at 90 psi	90	5/16-in.	12 gal.
9 HT 18892	4 at 90 psi	90	5/16-in.	12 gal.
9 HT 18882	3.5 at 90 psi	90	5/16-in.	12 gal.
9 HT 1888	3.5 at 90 psi	90	5/16-in.	12 gal.
9 HT 18961	4 at 90 psi	90	5/16-in.	12 gal.
9 HT 1881	4 at 90 psi	90	5/16-in.	12 gal.
9 HT 18803	4 at 90 psi	90	5/16-in.	12 gal.

1/2-INCH SQ. DRIVE



Delivers 125 to 160 ft.-lbs. of torque

Kit **\$84⁹⁹** | Wrench alone **\$59⁹⁹**

SPINDLE: Ring-retainer type... ideal for automotive use and jobs requiring quick socket changes.
TORQUE: Working range: 125 ft.-lbs.; Ultimate: 160 ft.-lbs. Trigger control lets you adjust torque to job. Reversible.
HOUSING: Cast-aluminum. Measures 7 inches long.
AIR INTAKE: Air inlet: 1/4-inch pipe thread.

ACCESSORIES: 8 sockets (7/16 thru 1/2-in.); Permanex® polyethylene case.
ORDER INFO: See warranty p. 113, chart at left for air requirements. Shpg. wt. 10 lbs. 12 oz.
9 HT 18881.....Kit \$84.99

Wrench alone.
ORDERING INFORMATION:
9 HT 1888—Wt. 6 lbs. 2 oz. \$59.99

3/8-INCH SQ. DRIVE



Ring retainer—
ideal for jobs
requiring quick
socket changes

Delivers
55 to 75 ft.-lbs.
of torque

\$79⁹⁹

Delivers 55 to 75 ft.-lbs. of torque

Kit **\$104⁹⁹** | Wrench alone **\$79⁹⁹**

SPINDLE: Ring-retainer type... ideal for commercial or industrial jobs.
TORQUE: Working range: 55 ft.-lbs. Ultimate: 75 ft.-lbs. Trigger-stop regulator lets you adjust torque to job. Reversible.
HOUSING: Aluminum housing. Rubber scuff guard on nose. Measures 5 3/4 inches long.
AIR INTAKE: Air inlet: 1/4-inch pipe thread.
ORDERING INFORMATION: See warranty page 113, chart above for air requirements.
Shipping weight 3 pounds.
T9 HT 18961.....\$79.99

SPINDLE: Ring-retainer type.
TORQUE: Working range: 55 ft.-lbs. Ultimate: 75 ft.-lbs. Trigger control adjusts torque to job. Reversible.
HOUSING: Cast-aluminum. Rubber scuff guard on nose. 5 3/4 inches long.
AIR INTAKE: Air inlet: 1/4-in. pipe thread.
ACCESSORIES: 7 sockets (3/16 thru 1 1/16-in.); Permanex® polyethylene case.
ORDER INFO: See warranty page 113, chart above for air requirements.
9 HT 18816—Shpg. wt. 5 lbs. 12 oz.Kit \$104.99
Wrench alone.
ORDERING INFORMATION:
9 HT 1881—Shpg. wt. 2 lbs. 13 oz. 79.99

Ball-type socket retainer
just like a regular
hand ratchet wrench
for fast, easy
socket changing



3/8-in. Speed Ratchet Wrench
Delivers up to 45 ft.-lbs. torque

Kit **\$89⁹⁹** | Wrench alone **\$69⁹⁹**

Ideal for installing spark plugs, carburetors, water pumps, etc.
SPINDLE: Ball-type retainer.
TORQUE: Delivers up to 45 ft.-lbs. of torque. No-load speed of 150 rpm. Finger-controlled teasing throttle for variable torques. Reversible. 100% ball bearings.
HOUSING: Die-cast aluminum. 10 1/4 inches long.
ACCESSORIES INCLUDED: 5 impact sockets (3/8 thru 1/2-inch); screw-driver bit; case.
AIR INTAKE: Air inlet: 1/4-inch pipe thread.

ORDER INFO: See warranty on page 113. See chart above left for air requirements to help you order proper compressor.
Shpg. wt. 4 lbs. 8 oz.
9 HT 18804...Kit \$89.99


Ratchet alone.
ORDERING INFO:
Shpg. wt. 2 lbs. 5 oz.
9 HT 18803.....\$69.99

CRAFTSMAN® Air-drive Tools deliver more power per pound than an

• **Durability**—air drive tools run cooler than electric, and tools that run cooler last longer

• **Weight**—Air-drive tools can be as little as half the weight of their electric counterpart. And after 8 hours on the job, you'll appreciate that

• **Convenience**—Air drive tools allow you to work in limited access area sometimes inconvenient with electric

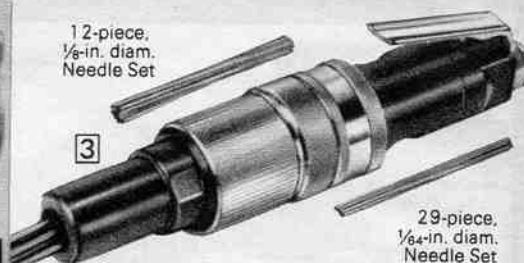

Needle Scaler
3600 blows per minute—removes rust, scale, paint, weld splatter, corrosion from metal
\$129.95

(1) **3/4-inch Impact Wrench.** From the United Kingdom and Japan.
SPINDLE: Ring socket retainer-type.
TORQUE: Delivers 500 to 700 ft.-lbs. of torque. Trigger control lets you adjust torque to job. Reversible.
HOUSING: Cast-aluminum. 8-inches long.
CAPACITY: Standard bolt size up to 1-inch.
AIR INTAKE: Air inlet; 1/4-in. pipe thread.
ORDER INFO: See chart below for air requirements to help you match your impact wrench with the proper compressor. See warranty facing page.
T9 HT 18962—Wt. 11 lbs. \$219.95


(2) **1-inch Impact Wrench.** From Japan. Powerful enough for use in heavy assembly, maintenance and steel fabrication operations. From Japan.
SPINDLE: Ring socket retainer for quick socket changing.
TORQUE: Delivers 1000 to 1350 ft.-lbs. of torque. Trigger control lets you adjust torque to suit the job. Reversible.
HOUSING: Cast-aluminum with side handle for two-hand control. 15 3/4-inches long.
CAPACITY: Standard bolt size up to 1 1/4 inches.
AIR INTAKE: Air inlet; 1/2-inch pipe thread.
ORDERING INFORMATION: See chart for air requirements below. See warranty on facing page.
T9 HT 18964C—6-in. Shank. Shpg. wt. 33 lbs. . \$269.95
T9 HT 18963C—Short Shank. Shpg. wt. 29 lbs. . 269.95

(3) **Needle Scaler.** From Japan.
SPEED: Teasing throttle controls speed of needles. Provides 3600 blows per minute.
CONSTRUCTION: Steel, 13 3/4 inches long.
AIR INTAKE: Air inlet; 3/8-inch pipe thread.
ORDERING INFORMATION: See warranty on facing page. See chart for air requirements for ordering the proper compressor.
9 HT 18879—Shpg. wt. 7 lbs. 3 oz. \$129.95
Needle Sets for Needle Scaler above.
12-piece Needle Set, 1/8-inch diameter.
9 HT 18935—Shipping weight 8 ounces. \$3.99
29-piece Needle Set, 1/8-inch diameter.
9 HT 18936—Shipping weight 4 ounces. 6.99

3/8-in. Drills feature 1/2-HP air motors that need very little maintenance



Our quietest Drill has air-exhaust diffuser, dead handle and teasing throttle with locking device
\$179.00

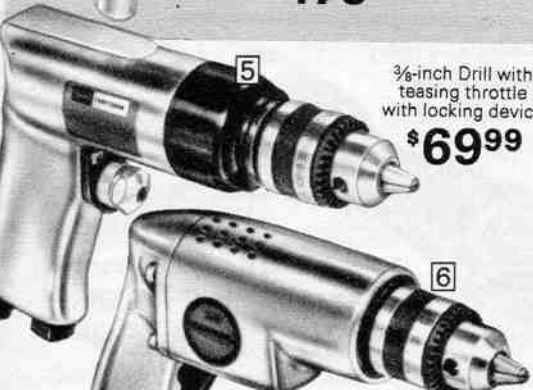

3/8-inch Drill with teasing throttle with locking device
\$69.99

Minimum air requirements for (1 thru 9) and (17 thru 20)

Catalog No.	Working SCFM	PSI	Hose	Tank
9 HT 18962	7.5	90	3/8-in.	20 gal.
9 HT 18963	12	90	1/2-in.	80 gal.
9 HT 18964	12	90	1/2-in.	80 gal.
9 HT 18879	8	90	3/8-in.	20 gal.
9 HT 18884	4	90	3/8-in.	12 gal.
9 HT 18925	4	90	3/8-in.	12 gal.
9 HT 18847	4	90	3/8-in.	12 gal.
9 HT 18938	6	90	3/8-in.	20 gal.
9 HT 18923	4	90	3/8-in.	12 gal.
9 HT 1885	4	90	3/8-in.	12 gal.
9 HT 18926	12	90	3/8-in.	30 gal.
9 HT 18827	12	75	3/8-in.	30 gal.
9 HT 18965	16	75	3/8-in.	30 gal.

Single-speed Drill
\$39.99

(4) **Our quietest Drill with teasing throttle**
Ideal for hole sawing, honing cylinders, drilling chassis frames and trailer bodies.

MOTOR, BEARINGS, GEARS: Air motor develops maximum 1/2-HP. Ball and needle bearing construction. Full-hardened double-reduction planetary gearing for smooth, quiet power transmission. Free speed of 900 rpm. Adjustable teasing throttle lets you vary speed . . . can be locked when desired speed is reached.
HOUSING: Die-cast aluminum, one-piece gear housing for precision alignment. 7 3/4 in. long. Removable dead handle.

CHUCK: Jacobs® 3/8-inch drill chuck.
AIR INTAKE: Air inlet; 1/4-inch pipe thread.
ORDER INFO: See warranty on facing page. See chart below left for air requirements.
9 HT 18884—Shipping weight 4 lbs. 3 oz. . \$179.00

(5) **Drill with teasing throttle**
Ideal for general drilling, wood boring, honing, reaming and countersinking. Imported from Japan.

MOTOR, BEARINGS, GEARS: Air motor develops maximum 1/2-HP. Ball and needle bearing construction. Full-hardened planetary gearing. Free speed of 2200 rpm. Adjustable teasing throttle lets you vary speed . . . can be locked when desired speed is reached.
HOUSING: Die-cast aluminum, one-piece gear housing for precision alignment. Steel end plates 6 1/2 in. long.
CHUCK: Jacobs® 3/8-inch drill chuck.

AIR INTAKE: Air inlet; 1/4-inch pipe thread.
ORDER INFO: See warranty on facing page. See chart below left for air requirements.
9 HT 18925—Shipping weight 3 pounds. \$69.99

(6) **Single-speed Drill**
Ideal for general drilling, wood boring, honing, reaming and countersinking. Imported from Japan.

MOTOR, BEARINGS, GEARS: Air motor develops max. 1/2-HP. Ball, needle bearing construction. Full-hardened planetary gearing. Free speed of 2800 rpm.
HOUSING: Die-cast aluminum two-piece gear housing. Steel end plates, 6 1/4 inches long.
CHUCK: Jacobs® 3/8-inch drill chuck.
AIR INTAKE: Air inlet; 1/4-inch pipe thread.
ORDER INFO: See warranty on facing page. See chart at left for air requirements.
9 HT 18847—Shipping weight 2 lbs. 15 oz. . \$39.99



Die Grinder Kit for fine contour grinding and finishing

Complete Kit | Grinder alone
\$138.00 | \$99.95

(7) **SPEED:** Built-in air regulator varies speed. Free speed of 35,000 rpm.
CONSTRUCTION: Steel. Ball-bearing construction. Rear exhaust.

ACCESSORIES INCLUDED: Four double-cut solid carbide rotary burrs with 1/4-in. shank diameter (3/8-in. cylindrical shape with end cut, 3/8-in. ball shape, 1/2-inch cylindrical shape with radius end, 1/2-in. taper shape—14° included angle); 2 chuck wrenches; chuck guard; 1/8-in. collet adapter; case.

AIR INTAKE: Air inlet; 1/4-in. pipe thread.
ORDER INFO: See warranty, on facing page. See chart far left for air requirements.
9 HT 18938—Wt. 2 lbs. . Kit \$138.00
Die Grinder alone.
ORDERING INFORMATION: See warranty on facing page.
9 HT 18875—Wt. 1 lb. 2 oz. . \$99.95

equally rated electric tool

FULL ONE YEAR WARRANTY ON CRAFTSMAN® AIR-DRIVE TOOLS

If any Craftsman air-drive tool fails due to a defect in material or workmanship within one year from the date of purchase, Sears will repair it, free of charge.

Warranty service is available by simply returning the air-drive tool to the nearest Sears store or Service Center throughout the United States.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

(8) Long-barrel Hammer with Retainer (10) alone. Longer stroke makes this our hardest hitting hammer. Designed for removing exhaust systems, shock absorber nuts, brake drums, license plate bolts, ball joints and universal joints, etc.

SPEED: Built-in air regulator varies speed. Provides 2100 blows per minute (bpm) of hard-hitting power.

CONSTRUCTION: Die-cast aluminum. 8 1/4 in. long. Retainer (10) included with tool.

AIR INTAKE: Air inlet: 1/4-in. pipe thread.

ORDER INFO: See chart at bottom of facing page for air requirements for ordering proper compressor. See warranty above.

9 HT 18923—Shipping weight 4 lbs. 8 oz. \$69.99

Hammer (8) above and Kit. Includes Permanex® case and items (12) thru (16).

9 HT 18924—Shipping weight 7 pounds 7 ounces Kit \$94.99

(9) Short-barrel Hammer with Retainer (10) alone. Designed for removing exhaust systems, shock absorber nuts, brake drums, license plate bolts, etc.

SPEED: Built-in air regulator varies speed. Provides 3500 blows per minute of rapid hammer action.

CONSTRUCTION: Die-cast aluminum. 6 3/4 inches long. Retainer (10) included with tool.

AIR INTAKE: Air inlet: 1/4-inch pipe thread.

ORDER INFO: See chart at bottom of facing page for air requirements for ordering proper compressor. See warranty above.

9 HT 1885—Shipping weight 4 lbs. 5 oz. \$39.99

Hammer (above) with Kit. Includes Permanex® case and items (12) thru (16).


9 HT 18851—Shipping weight 7 pounds 8 ounces Kit \$64.99

(10 thru 17) Accessories for air-impact hammers. Forged high-carbon steel. Tempered to hold edges. Shanks ground to fit .401 openings of both hammers (8) and (9).

Item	Catalog Number	Type	Shipping weight	Each
(10)	9 HT 18966	Retainer Attachment	4 oz.	\$3.49
(11)	9 HT 18929	Posi-lock Retainer	1 lb. 4 oz.	19.99
(12)	9 HT 18811	Muffler Splitter	15 oz.	4.99
(13)	9 HT 18812	Pipe, Panel Cutter	13 oz.	4.99
(14)	9 HT 18813	3/4-inch Cold Chisel	13 oz.	3.49
(15)	9 HT 18814	Rivet Cutter	12 oz.	3.49
(16)	9 HT 18815	Pin Punch	13 oz.	3.49
(17)	9 HT 18818	Claw Ripper	7 oz.	4.99

YOU CAN DO MORE...

Match your Air-drive Tool with proper compressor sold on pages 104 and 105



... your Compressor can do more with this wide selection of Air-drive Tools

Air-Impact Hammers



(8) Long-barrel Air-Impact Hammer ... 2100 blows per minute with longer stroke for more power
\$69.99


Hammer Kit \$94.99

(9) Short-barrel Air-Impact Hammer ... 3500 blows per minute
\$39.99

Hammer Kit \$64.99

Vertical-action Sander for rough sanding or grinding

\$99.99

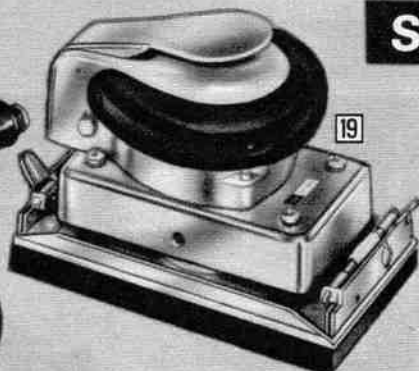

Orbital-action Sander for finishing flat surfaces \$69.99

Sanders



Rotary/Orbital-action Sander ... 2 sanding actions for finishing flat and contoured surfaces
\$69.99

(18) Vertical-action Sander. Vertical-action for delicate feather edging to full-speed sanding and grinding. Japan. PAPER SIZE: 7-inch sanding surface.

SPEED: Built-in air regulator varies speed. Free speed of 5000 rpm.

CONSTRUCTION: Die-cast aluminum with plastic handles. Ball-bearing construction. Muffled handle exhaust.

AIR INTAKE: Air inlet: 1/4-in. pipe thread.

ORDER INFO: See chart at bottom of facing page for air requirements to help you order proper compressor. See warranty above. Shipping weight 6 pounds.

9 HT 18926 \$99.99

(19) Orbital-action Sander. Orbital-action helps deliver patternless finish for flat surfaces. From Japan. PAPER SIZE: 3 3/4x9 inches.

SPEED: Built-in air regulator varies speed. Free speed of 8000 rpm.

CONSTRUCTION: Die-cast aluminum with rubber guard. Ball-bearing construction. Muffled rear exhaust.

AIR INTAKE: Air inlet: 1/4-inch pipe thread.

ORDER INFO: See chart at bottom of facing page for air requirements. See warranty above.

Shipping weight 7 pounds.
9 HT 18827 \$69.99

(20) Rotary/Orbital Action Sander. Rotary-action provides smooth, circular sanding; orbital-action helps deliver patternless finish. Ideal for auto body work. From Japan.

PAPER SIZE: 5-inch sanding surface. Order paper below.

SPEED: Built-in air regulator varies speed. Free speed of 10,000 rpm.

CONSTR.: Die-cast aluminum housing with rubber guard. Ball-bearing construction. Circular exhaust diffuses air flow so as not to interfere.

AIR INTAKE: Air inlet: 1/4-inch pipe thread.

ORDER INFO: See chart p. 112 for air requirements. Warranty above.

9 HT 18965—Shipping weight 4 pounds 4 ounces \$69.99

Pressure Sensitive Sanding Discs (not shown) for Sander (20) above.

9 HT 30051—Fine grain. Pkg. of 5. Shpg. wt. 3 oz. Pkg. 99c

9 HT 30052—Medium grain. Pkg. of 5. Shpg. wt. 4 oz. Pkg. 99c

9 HT 30053—Coarse grain. Pkg. of 4. Shpg. wt. 4 oz. Pkg. 99c

Order sanding abrasives on page 117

Our Lowest Priced CRAFTSMAN® Gas Chain Saw




Super-lightweight Chain Saw

\$78⁹⁵

1

Our 2 most powerful CRAFTSMAN® Super Lightweight Gas Chain Saws

... 14-in. guide bar, 2.1-cu. in. engine

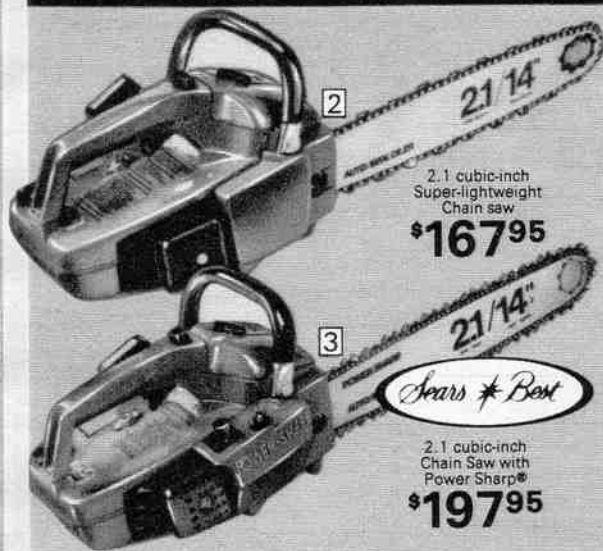

2

2.1 cubic-inch
Super-lightweight
Chain saw

\$167⁹⁵

3

*Sears * Best*

2.1 cubic-inch
Chain Saw with
Power Sharp®

\$197⁹⁵

(1) ENGINE: 2.0 cu. in. 2-cycle Craftsman® engine. Recoil starter. Spark, noise arresting muffler. 11.5-oz. fuel tank. All-position carb. CHISEL CHAIN: Non-chrome plated. GUIDE BAR: 10-in. Hardened steel rails. CHAIN OILER: Automatic. HOUSING: Red magnesium. Weighs only 8 lbs. 7 oz. Tubular-steel front handle. ORDERING INFORMATION: See 90-day warranty below. Instructions, engine oil, guide bar wrench incl. Bar and chain sent unattached. Order optional accessories this, facing page. 32 HT 35201—Wt. 11 lbs. 4 oz. **\$78.95**

Replacement 10-in. Chisel Chain
32 HT 3622—Shpg. wt. 7 oz. **\$10.00**

(2, 3) Super Lightweight Gas Chain Saws
ENGINE: 2.1-cubic inch 2-cycle. Automatic recoil starter. Noise and spark arresting muffler. 11-oz. gas tank. All-position carburetor. GUIDE BAR: 14-inch Friction-Fighter sprocket nose with roller bearings. CHAIN OILERS: Automatic and manual oilers.


(2) Chain Saw with Chisel Chain
CHAIN: Chrome-plated Chisel.
HOUSING: Magnesium frame. Weighs 10 lbs. 4 oz. Vinyl-covered front handle, rubber grip rear handle.
ORDERING INFO: See 90-day warranty below. Instructions, engine oil, bar wrench included. Bar and chain sent unattached.
32 HT 35211—Wt. 13 lbs. 10 oz. ... **\$167.95**
Replacement 14-in. Chisel Chain for (2)
32 HT 3613—Shpg. wt. 8 oz. **\$16.50**

(3) Chain Saw with Barracuda Chain
CHAIN: Barracuda fast cut, Power Sharp® self-sharpening system. Chrome-plated.
HOUSING: Magnesium. Weight 10 lbs. 8 oz. Vinyl-covered front handle, die-cast rear handle with rubber grip.
ORDERING INFO: See 90-day warranty below. Instructions, engine oil and bar wrench included. Bar, chain sent unattached.
32 HT 35215—Wt. 13 lbs. 15 oz. ... **\$197.95**
Replacement 14-in. Barracuda Chain for (3)
32 HT 3624—Shpg. wt. 9 oz. **\$21.50**

Full 90-day warranty on Gas Chain Saws and Full 1-year warranty on Electric Chain Saws: For 90 days from date of purchase on gasoline chain saws or 1 year from date of purchase on electric chain saws. Sears will repair any defect in material or workmanship in this chain saw at no charge. If chain saw is used for commercial or rental purposes, warranty applies for only 30 days from date of purchase. Warranty service is available by contacting the nearest Sears store or Service Center throughout the U.S. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Compact Lumber Maker

Lets you cut
planks, timber

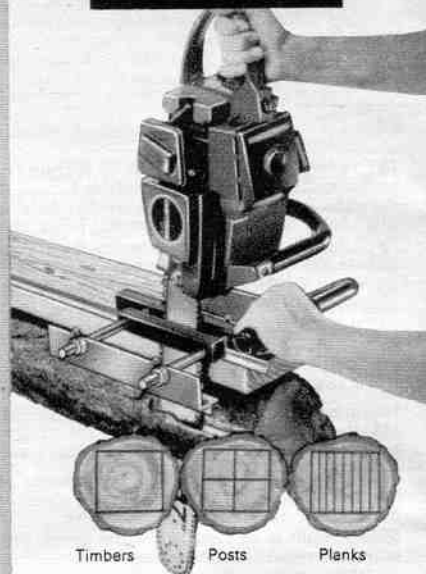

Chain saw
not included **\$49⁹⁵**

Clamp this lumber maker to your own chain saw, you're ready to mill logs. Takes care of square-cut adjustments. HOW IT WORKS: First attach guide rail to a level plank up to 12 ft. long, (plank not included), then spike plank to top of log, make first cut. Spike plank surface for second cut... continue process until you have turned log into squared timber from which you can cut square lumber, beams, posts or planks as thin as 1/2-in., up to 12 ft. long. Clamps to any chain saw guide bar to 30 in. long... no holes to drill... releases saw in seconds for normal cutting. Comes with metal clamp and bracket assembly, handle with plastic hand grip and 3 metal guide rails in 4-foot sections for straight cuts. ORDERING INFO: Lumber maker not recommended for use with Barracuda chain. Instructions. Unassembled. Shipping weight 8 lbs. 4 oz. 32 HT 36616 **\$49.95**

CRAFTSMAN® Electric Chain Saws

All are double-insulated
All have instant-start



4

*Sears * Best*

\$98⁹⁵

5

\$58⁹⁵

6

\$28⁹⁵

(4) 2.00-HP with 14-in. guide bar
Barracuda chain, 2-HP cuts more, faster than any other Sears electric. MOTOR: 2.00-HP. All ball-bearings. Safety lock switch. BARRACUDA CHAIN: Uses Power-Sharp®, self-sharpening system. Chrome-plated chain. GUIDE BAR: 14-in. Friction Fighter sprocket-nose. Roller bearings. CHAIN OILERS: Automatic and manual. Normal, heavy-duty use. HOUSING: Red and black aluminum, gear housing, polymer motor housing. Plastic-coated steel front handle. Tempered-steel spike bar. Built-in chain-tensioning device. Weighs 12 pounds. ELECTRICAL INFO: UL listed; 110-120-volt 60-c. AC. 1200 watts. 10-inch 2-wire cord. Double-insulated. ORDER INFO: See full one-year warranty above. Instructions and bar wrench included. Bar, chain sent unattached. 32 HT 3470C—Shipping weight 15 pounds **\$98.95**

(5) 1.50-HP with 12-in. guide bar
MOTOR: 1.50-HP. Sleeve bearings. Safety lock switch. CHISEL CHAIN: Chrome-plated. GUIDE BAR: 12-inch. Polished steel. CHAIN OILER: Manual. HOUSING: Red, black aluminum gear housing, spike bar. Polymer motor housing, wrap-around handle. Chain tensioner. Weighs 10 pounds 3 ounces. ELEC. INFORMATION: UL listed; 110-120-v. 60-c. AC. 1200 watt 10-inch 2 wire cord. Double-insulated. ORDER INFO: Warranty above. Bar, chain unattached. Instructions, bar wrench incl. 32 HT 3460—Shpg. wt. 12 lbs. **\$58.95**
Replacement 12-inch Chisel Chain.
32 HT 3611—Wt. 8 oz. **\$12.50**

(6) .75-HP with 8-in. guide bar
MOTOR: .75-HP motor. Sleeve bearings. Has no safety lock switch. CHAIN: Chisel-chain. Non-chrome plated. GUIDE BAR: 8-inch. Unpolished steel. CHAIN OILER: Manual. HOUSING: Red and black polymer gear housing, spike bar, motor housing. Plastic handle. Weighs only 9 pounds. ELECTRICAL INFORMATION: UL listed; 110-120-v., 60-c. AC. 960 w. 10-in. 2 wire cord. Double-insulated. ORDER INFORMATION: Warranty above. Instructions, bar wrench included. Bar, chain sent unattached. 32 HT 3440—Shpg. wt. 10 lbs. **\$28.95**
Replacement 8-in. Chisel Chain
32 HT 3614—Wt. 6 oz. **\$7.50**

114 **Sears** COMPBK SLAEJJD **Replacement 14-inch Barracuda Chain**
32 HT 3610—Wt. 9 oz. **\$21.50**

CRAFTSMAN® Electric Chain Sharpener

Choose 12-volt DC field model or 110-120-volt AC model for your workshop



\$39.95

HOW IT WORKS: Hones chain from 1/4-in. thru .404-in. pitch.

CONSTRUCTION: Aluminum housing, metal guide plate. Has depth gauge, case, 3 stones (3/32, 1/16, 1/32), 2 shims, wrench, storage hanger.

12-volt DC Sharpener. 20,000-rpm motor. Lighter plugs, battery clips. ELECTRICAL INFO: 10-ft. cord. Uses 72 watts and 6 amperes.


ORDERING INFO: Wt. 3 lbs. 6 oz. 32 HT 36572\$39.95

120-volt AC Sharpener.

ELECT. INFO: 24,000 rpm motor. 8-ft., 3-wire cord, adapter. 240 watts, 2 amps 110-120 v., 60-Hz. AC. UL listed. Shipping weight 3 lbs. 10 oz. 32 HT 36571\$39.95

Replacement Stones (not shown). For above sharpeners. Package of two.

Size	Catalog No.	Wt.	Pkg.
3/32 in.	32 HT 36581	1 oz.	\$1.99
1/16 in.	32 HT 36582	1 oz.	1.99
1/32 in.	32 HT 36583	1 oz.	1.99

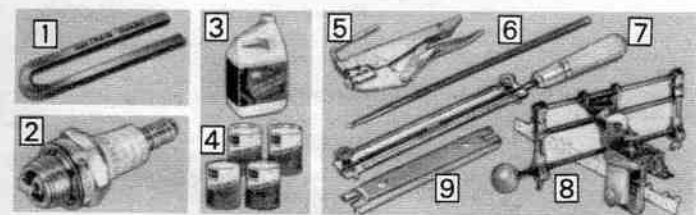

(1) Slide-on Chain Guard. Rigid black plastic guard slides onto bar, snaps to cover. Resists dirt. Helps protect chain, fingers.

For guide bar to 14 in. 32 HT 36513—Wt. 5 oz.\$1.69

For guide bar to 17 in. 32 HT 36512—Wt. 5 oz.\$1.69

(2) Champion Spark Plugs. For chain saw engines.

ORDERING INFORMATION:
CJ6. Fits Sears models 35145, 47, 48, 49; 35108, 09, 18, 19, 75, 87, 97, 98; 35026, 72; 35177, 78; 35371, 75. 32 HT 36402—Wt. 2 oz.\$1.69
CJ8. Fits Sears models 35082, 83, 84, 85, 86, 87, 88, 94, 95, 96; 35224, 35233; 35824, 26, 29; 35201, 05; 35091; 35211, 35215. 32 HT 36403—Wt. 2 oz.\$1.69

(3) Bar and Chain Lubricant. Helps cut excessive heat between bar and chain. For less friction and longer chain life. 30-weight oil with viscosity-improver to allow oil to cling to chain even at high speed. Dyed red to distinguish from engine oil.

ORDERING INFO: 1-gallon bottle. Shipping weight 8 lbs. 32 HT 36554Bottle \$3.99

(4) Chain Saw Engine Oil. SAE 30. Non-detergent. Especially for 2-cycle, air-cooled engine fuel mixing. Dyed green to distinguish from bar, chain lubricant.

ORDER INFO: Package of 4 eight-oz. cans . . . enough to mix with 4 gal. of gasoline (16:1 mix). Shipping weight 2 lbs. 3 oz. 32 HT 36555Pkg. \$1.99

(5) Break-n-mend Tool. Punch old rivet out, spin-in new. Speeds-up chain repairs. 2000-lb. grip handle locks tight onto chain. Adjusts to fit all chains to 3/8-in. pitch.

ORDERING INFORMATION:
32 HT 36617—Wt. 1 lb. 8 oz.\$15.95

(6 and 7) File Guide, Pkg., 2 files

ORDERING INFORMATION:
3/32-in. diameter. Fits saws 3400, 07, 071, 08, 11, 17; 3440; 3444; 3455, 60, 65, 70; 35082-88; 35091, 93-96; 35201, 05, 11, 15, 55, 35224; 35233; 35824. For 1/4, 3/8-in. low-profile pitch and Barracuda chains.

(6) 32 HT 36524—Wt. 2 oz.\$2.99
(7) 32 HT 36516—Wt. 6 oz.Pkg. 4.89

3/16-in. diameter. Fits 3401-02; 3414-15; 35147; 35177, 371. All .325 pitch chains.

(6) 32 HT 36525—Wt. 2 oz.\$2.99
(7) 32 HT 36501—Wt. 6 oz.Pkg. 4.89

3/32-in. diameter. Fits 3403, 16; 35145; 35148-9; 35826-829-178, 375. For 3/8-in. pitch, .325 pitch Barracuda chain.

(6) 32 HT 36526—Wt. 3 oz.\$2.99
(7) 32 HT 36502—Wt. 9 oz.Pkg. 4.89

(8) Clamp-on Hand Chain Sharpener

HOW IT WORKS: Fits all chain saws. Clamp sharpener on bar, set all angles to file more accurately than hand-held files. Adjust height.

CONSTRUCTION: Aluminum. Adjustable. Has depth-gauge file, round-file handle.

ORDER INFO: Unassembled. Instructions incl. Order round file separately to fit pitch. See (6) above.

32 HT 36509—Wt. 1 lb. 4 oz.\$15.99

(9) Depth Gauge—Filing Guide

Double-ended. Fits 1/4 thru .404-in. pitch chain. .025-in. one end, .030 in. on the other. Hardened steel.

ORDERING INFORMATION:
32 HT 36557—Shpg. wt. 2 oz.\$1.89

Replacement Chains by Oregon

ORDERING INFORMATION: Check saw model number, bar length, chain pitch, drive link count before ordering replacement chain.

Brand	Model	Bar Length (in.)	Chain Pitch	No. of Drive Links	Catalog Number	Wt. oz.	Price
Dayton	2Z760	12	1/4	66	32 HT 3627	8	\$13.50
	2Z573	14	1/4	76	32 HT 3605	8	14.50
	CS351	12	3/8LP	45	32 HT 3623	7	12.50
		14	3/8LP	53	32 HT 3613	8	16.50
		15	3/8LP	57	32 HT 3628	9	17.50
Echo	CS301, CS302	12	1/4	66	32 HT 3627	8	13.50
		14	1/4	76	32 HT 3605	8	14.50
	CS451VL, CS601, CS602VL	16	3/8	59	32 HT 3616	12	19.50
	CS452VL, CS701, CS702	20	3/8	69	32 HT 3620	14	23.50
Frontier	All	12	1/4	64	32 HT 3652	8	13.50
		14	1/4	72	32 HT 3653	8	14.50
Homelite	XL, XL2	10	3/8LP	42	32 HT 3655	7	9.50
	Super 2 (After Serial No. 5042001)	12	3/8LP	48	32 HT 3611	8	12.50
	XL12-Super XL Auto, XL-400-XL-924	14	3/8LP	53	32 HT 3613	8	16.50
	EZ series, 150, XL-100	16	3/8	59	32 HT 3616	12	19.50
		16	3/8	60	32 HT 3654	12	16.50
Husqvarna	22, 35, 35VR	12	1/4	64	32 HT 3652	8	13.50
	Husky Jr. 121	14	1/4	72	32 HT 3653	8	14.50
Jonsereds	36	12	1/4	64	32 HT 3652	8	13.50
		14	1/4	72	32 HT 3653	8	14.50
Lombard	Pony, Little Lightning, STD, Deluxe, Super #CS-2500, CS-2600, CS-2700, CS-2800, CS-2900, Comango, Lightning I thru V	10	1/4	57	32 HT 3651	7	12.50
		12	1/4	64	32 HT 3652	8	13.50
		14	1/4	72	32 HT 3653	8	14.50
		16	1/4	79	32 HT 3616	12	19.50
		16	3/8	60	32 HT 3654	12	16.50
McCulloch	Mini Mac 25	10	3/8LP	39	32 HT 3658	7	9.50
	Mini Mac 30	12	3/8LP	44	32 HT 3656	7	10.50
	Mini Mac 35	14	3/8LP	49	32 HT 3657	8	11.50
	SP40, Power Mac 6A (sprocket nose bar only)	14	1/4	72	32 HT 3653	8	14.50
	Mini Mac 6, Power Mac 6-6A (solid nose bar only)	10	1/4	57	32 HT 3651	7	12.50
Montgomery Wards	Mini Mac 6A	12	1/4	64	32 HT 3652	8	13.50
	Power Mac 6, Pro 10-10A	16	3/8	60	32 HT 3654	12	16.50
		10	1/4	57	32 HT 3651	7	12.50
		12	1/4	64	32 HT 3652	8	13.50
		14	1/4	72	32 HT 3653	8	14.50
Partner	Mini P	12	1/4	64	32 HT 3652	8	13.50
		14	1/4	72	32 HT 3653	8	14.50
	Mini P II	12	3/8LP	45	32 HT 3623	7	12.50
		14	3/8LP	53	32 HT 3613	8	16.50
		15	3/8LP	57	32 HT 3628	9	17.50
Pioneer	P10	12	3/8LP	45	32 HT 3623	7	12.50
		14	3/8LP	53	32 HT 3613	8	16.50
		15	3/8LP	57	32 HT 3628	9	17.50
Poulan	XX (Before Serial Number 20287653)	12	1/4	66	32 HT 3627	8	13.50
	XX (After Serial Number 20287653)	14	1/4	76	32 HT 3605	8	14.50
		10	3/8LP	40	32 HT 3622	7	10.00
		12	3/8LP	45	32 HT 3623	7	12.50
		14	3/8LP	53	32 HT 3613	8	16.50
Remington	XXV	12	1/4	66	32 HT 3627	8	13.50
		14	1/4	76	32 HT 3605	8	14.50
		16	3/8	59	32 HT 3616	12	19.50
	451						
Sears Craftsman®	Mighty-Mite I, II, EL-2	10	1/4	57	32 HT 3651	7	12.50
	EL-4, Limb-n-Trim	12	1/4	64	32 HT 3652	8	13.50
	Electric Saws without "C" Prefix on Serial Number	8	3/8LP	34	32 HT 3614	6	7.50
	Same Models as Above with "C" Prefix on Serial Number; plus models 100, 200, 300, 400	10	3/8LP	39	32 HT 3658	7	9.50
		12	3/8LP	44	32 HT 3656	7	10.50
Skill		14	3/8LP	49	32 HT 3657	8	11.50
	3440, 3444	8	3/8LP	34	32 HT 3614	6	7.50
	3455, 3400, 35201, 35082	10	3/8LP	40	32 HT 3622	7	10.00
	3460, 3411, 34071	12	3/8LP	48	32 HT 3611	8	12.50
	35083	12	1/4	66	32 HT 3627	8	13.50
Stihl	35084, 35085, 35224, 35824	14	1/4	76	32 HT 3605	8	14.50
	35086, 35087, 35088, 35233	14	1/4	76	32 HT 3606	10	23.50
	3465, 3408, 35211, 35094	14	3/8LP	53	32 HT 3613	8	16.50
	3470, 3417	14	3/8LP	53	32 HT 3610	9	21.50
	35215, 35095	14	3/8LP	53	32 HT 3624	9	21.50
Village Blacksmith	3403, 3416	14	.325	59	32 HT 3603	11	22.50
	35096	16	3/8LP	57	32 HT 3615	10	22.50
	35371, 35147, 35177, 35187	17	.325	71	32 HT 36217	12	22.50
	35375, 35138, 35148, 35178, 35197	17	.325	71	32 HT 36212	13	26.50
	35826	16	3/8	59	32 HT 3616	12	19.50
Wen	35829	20	3/8	69	32 HT 3620	14	23.50
	35205, 35093	12	3/8LP	45	32 HT 3623	7	12.50
	35091	12	3/8LP	45	32 HT 3625	8	19.50
	35255	15	3/8LP	57	32 HT 3628	9	17.50
Wizard (Western Auto)	1705, 1600 Electric	10	3/8LP	40	32 HT 3622	7	10.00
	1610, 1712, 1601 Electric	12	3/8LP	45	32 HT 3623	7	12.50
	1612, 1616	15	3/8LP	57	32 HT 3628	9	17.50
	1631, 1645	16	3/8	60	32 HT 3654	12	16.50
Wright	015, 020, 020P	12	1/4	64	32 HT 3652	8	13.50
	030, 031AV	14	1/4	72	32 HT 3653	8	14.50
		16	3/8	60	32 HT 3654	12	16.50
	Type I	10	3/8LP	42	32 HT 3655	7	9.50
		12	3/8LP	48	32 HT 3611	8	12.50
Wright		14	3/8LP	53	32 HT 3613	8	16.50
	1100 Type I, 2000	10	3/8LP	42	32 HT 3655	7	9.50
	1200 Type I	12	3/8LP	49	32 HT 3657	8	11.50
	Cat 12	12	1/4	66	32 HT 3627	8	13.50
	Cat 14	14	1/4	76	32 HT 3605	8	14.50
Wright	121, 122A	14	1/4	76	32 HT 3605	8	14.50
	111-(Before Serial Number 20287653)	12	1/4	66	32 HT 3627	8	13.50
		14	1/4	76	32 HT 3605	8	14.50
	111-Serial Number 20287653)	10	3/8LP	40	32 HT 3622	7	10.00
		12	3/8LP	45	32 HT 3623	7	12.50
Wright		14	3/8LP	53	32 HT 3613	8	16.50

Replacement Guide Bars




ORDER INFO: Check saw model number, guide bar length. Check type.

Bar type	Bar length	Bar tip type	For saw models	Catalog Number	Shpg. wt.	Price
Solid Steel ...	10-in.	Hardened	35082, 201	32HT36385	1 lb.	\$13.95
	12-in.	Hardened	35083, 93	32HT36392	1 lb. 3 oz.	14.95
	14-in.	Hardened	35084, 94, 224, 824	32HT36393	2 lbs.	17.95
	14-in.	Sprocket	35095, 211, 215	32HT36396	2 lbs.	22.95
Laminated Steel ...	12-in.	Sprocket	35091, 205	32HT36397	1 lb. 5 oz.	16.95
	15-in.	Sprocket	35255	32HT36351	1 lb. 15 oz.	23.49
	17-in.	Sprocket	35177, 8; 35147, 8; 35371, 5	32HT36361	2 lbs.	24.95

Portable Electric Power Plants

For power whenever and wherever you need electricity

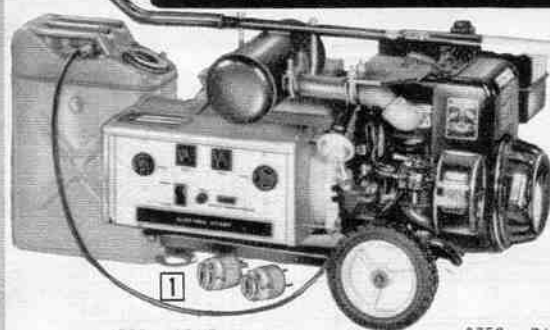


4500-w., 10-HP manual start
without wheels, handle
\$959⁹⁵

3500-w., 8-HP
manual start
\$859⁹⁵



2750-w., 7-HP
manual start
\$709⁹⁵



2600 watts, 6 HP
\$419⁹⁵



1200 watts, 3.5 HP
\$274⁹⁵



(1 thru 3) CRAFTSMAN® Dual-voltage long-run Power Plants

ENGINE: Aluminum, air-cooled Craftsman® engine. 4 cycles, 3600 rpm. Over-sized spark-arrest muffler. (1 and 2) with choice of electric or manual recoil start. Electric-start units need auto-type 12-volt battery. (3) with manual recoil start only. Compression release.

ELECTRICAL INFORMATION: 25% surge capacity gives extra power needed to start electric motors. Built-in overload protection. Battery charger (cables, clips included) provides up to 8 amps DC power for 12-volt batteries. Voltage regulation $\pm 2\%$ at 60 Hz. Skewed stator reduces radio and TV interference. Steel core retains magnetism.

CONSTRUCTION: Lightweight steel, aluminum. Spring-type vibration dampeners. Aztec gold-color and black baked-on enamel finish. Dual handles, 1-gallon main tank. Units run approximately 6 to 24 hours when connected to auxiliary gas tanks, depending on load requirements. Wheels, extension handle not included; order wheel kit in Big Book.

CONTROL PANEL: Three 120-volt outlets, one locking type with 3-prong male adapter plug; one locking type 240-volt outlet with 4-prong male adapter plug. Battery charger terminals. Overload warning light. Full capacity switch on (2 and 3). Start-stop switch.

AUXILIARY FUEL, OIL SYSTEMS: Gas system: 5-gallon tank, fuel pump, tank selector valve, quick disconnect couplers, hoses to connect with engine. Oil system: $2\frac{1}{2}$ -quart reserve tank, engine oil level sensor, replenishment pump. Engine shuts off when oil level in reserve oil tank is low.

FULL ONE YEAR WARRANTY FOR (1 thru 6) For 1 year from date of purchase, Sears will repair any defect in material or workmanship at no charge. If used for commercial or rental purposes, this warranty applies for only 30 days from date of purchase. Warranty service is available by contacting nearest Sears store or Service Center throughout the U.S. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

SPECIFICATIONS AND ORDERING INFORMATION: See Warranty at left. Note: Do not use in closed rooms or enclosed compartments.

Item	Power Plant Voltage Type	Wattage Rated Surge	HP at 3600 rpm	Type Starter	Gas Tank Capacity	No. AC Outlets 120-v. 240-v.	Dimensions Length Width Height	Actual Weight	Item	Catalog Number	Shipping weight	Price
(1)	Dual-voltage	4500-w. 5625-w.	10	Manual	*6-gal.	3	1 29 in. 17½ in. 17 in.	173 lbs.	(1)	32HT32504N	198 lbs.	\$959.95
(1)	Dual-voltage	4500-w. 5625-w.	10	Electric	*6-gal.	3	1 29 in. 17½ in. 17 in.	175 lbs.	(1)	32HT32505N	200 lbs.	1049.95
(2)	Dual-voltage	3500-w. 4375-w.	8	Manual	*6-gal.	3	1 29 in. 17½ in. 17 in.	163 lbs.	(2)	32HT32502N	188 lbs.	859.95
(2)	Dual-voltage	3500-w. 4375-w.	8	Electric	*6-gal.	3	1 29 in. 17½ in. 17 in.	165 lbs.	(2)	32HT32503N	190 lbs.	949.95
(3)	Dual-voltage	2750-w. 3437-w.	7	Manual	*6-gal.	3	1 27 in. 18 in. 16¼ in.	143 lbs.	(3)	32HT32501N	168 lbs.	709.95
(4)	Single-voltage	2600-w. 3250-w.	6	Manual	1-gallon	2	24 in. 19 in. 17½ in.	95 lbs.	(4)	32HT32404N	117 lbs.	419.95
(5)	Single-voltage	2000-w. 2500-w.	5	Manual	2-quart	2	21¼ in. 17¾ in. 15½ in.	65 lbs.	(5)	32HT32405N	77 lbs.	364.95
(6)	Single-voltage	1200-w. 1500-w.	3.5	Manual	2-quart	2	18¼ in. 16¾ in. 15¼ in.	60 lbs.	(6)	32HT32402N	71 lbs.	274.95

*1-gallon main tank, plus 5-gallon auxiliary tank.

BLAST AWAY dirt and grime with Electric-driven cold-water Power Washers

Our most powerful Power Washer

Delivers 2 gal. per minute at 700 pounds per sq. in. pressure



\$499⁹⁵



Del. 2 gal. per minute at 550 *PSI pressure
\$419⁹⁵



Del. 1.8 gal. per minute at 500 *PSI pressure
\$279⁹⁵

Detergent for power washers (7 thru 9)

Reusable container fits power washers (7 thru 9). Just set container in washer unit, attach suction hose... no mixing needed. Ideal for general purpose cleaning. 1-gallon bottle.

ORDERING INFORMATION:
32 HT 44611—Shpg. wt. 9 lbs. Bottle \$6.19

HOW THEY WORK: Clean cars, filters, farm equipment... simply attach garden hose to unit, place suction hose into chemical container (not incl.), plug unit into extension cord (not incl.) and you're ready. Because chemicals are not channeled through pump, vital parts are protected. Switch to low pressure to apply cleaner. Switch back to high pressure for final rinse. Most effective when high pressure water is applied at 45° angle to cleaning area.

(7) 1-HP Power Washer with 4-way nozzle

OPERATING FEATURES: Adjustable 4-way nozzle... 0°, 15°, 40° and low pressure setting for detergent application. Carries 2, one-gallon detergent containers (not incl.). Fitted with 3-wire, 8-foot cord. Capacitor start motor. Thermal overload protector. Unloader valve. See comparison chart below.

ELECTRICAL INFO: 110-120-v., 60-Hz. AC. 1150-w. On-off switch.

ORDERING INFORMATION: Partly assembled. Pay motor carrier charges from factory near Sioux City, Ia.; allow extra time; no C.O.D.'s. Shipping weight 68 pounds. F32HT44689N. \$499.95

(8) ¾-HP Power Washer with 4-way nozzle

OPERATING FEATURES: Adjustable 4-way nozzle... 0° spray (for cracks, corners); 15° spray (for average cleaning); 40° spray (for large area); low pressure for detergent application. Unloader valve protects pump from pressure damage. Thermal overload protector guards motor against burnouts. Incl. 3-wire, 8-ft. cord. See comparison chart below.

ELEC. INFO: 110-120-v., 60-Hz. AC. 1150 watts. On-off switch. UL listed.

ORDERING INFORMATION: Partially assembled. See "N" suffix, page 82. Shipping weight 55 pounds. 32 HT 44626N. \$419.95

(9) ½-HP Power Washer with 2-way nozzle

OPERATING FEATURES: Adjustable 2-way nozzle... use high pressure spray with clear water to wash off dirt. Low pressure spray to apply cleaner. Switch back to high pressure for final rinse. Simply turn nozzle while you work. Thermal overload protector guards motor against burnouts. Unloader valve. Incl. 3-wire, 8-ft. cord. See comparison chart below.

ELEC. INFO: 110-120-v., 60-Hz. AC. 900 watts. On-off switch. UL listed.

ORDERING INFORMATION: Partially assembled. See "N" suffix, page 82. Shipping weight 48 pounds. 32 HT 44622N. \$279.95

Comparison Chart for Electric-driven Power Washers (7 thru 9)

Item	Motor HP	Pump Type	Discharge Rate		18-in. Pistol Grip Type	Neoprene Hose	Dimensions		
			PSI**	GPM†			Length	Width	Height
7	1-HP	3 piston	700	2	brass gun	25 feet	28 in.	16 in.	32 in.
8	¾-HP	2 piston	550	2	brass gun	25 feet	21 in.	15 in.	15 in.
9	½-HP	2 piston	500	1.8	steel wand	20 feet	21 in.	15 in.	15 in.

**PSI (pounds per sq. in.) †GPM (gallons per minute)

ABRASIVES Choose the grit and size you need for machine or hand sanding

Whether you use them for your sander or manual work, Sears has just the abrasive you need; choose from these four basic groups:

Aluminum Oxide—all-purpose abrasive best for wood and plastic.

Non-clogging—a high-quality aluminum oxide paper with a coating of zinc stearate added to help prevent clogging, increase wear.

Tungsten Carbide—these have a steel backing and an extremely tough tungsten carbide coating. Sands concrete, metal—even planes wood.

Non-woven—Steel mesh with abrasive. For cleaning metal, tiles, floors.

Sanding Discs for portable, bench sanders

GRIT, SIZE AND ORDERING INFORMATION:

Diam.	Hole	Grit	Grit Number	Pkg. of	Catalog Number	Wt. lbs. oz.	Price Pkg.	5 Pkgs.
Aluminum Oxide, paper-backed								
4-in.	1/4-in.	Asstd.*	40, 80, 120	6	9 HT 2544	4 59c	\$2.70	
5-in.	None	X-Fine	220	6	9 HT 26051	3 79c	3.50	
		Fine	120	6	9 HT 26052	3 79c	3.50	
		M-Fine	80	6	9 HT 26053	3 79c	3.50	
5-in.	1/4-in.	Coarse	36	3	9 HT 2542	4 69c	3.20	
		Asstd.*	60, 120	6	9 HT 2543	4 79c	3.50	
6-in.	1/4-in.	Fine	100	6	9 HT 25321	5 99c	4.50	
		Med.	60	6	9 HT 25322	7 99c	4.50	
		Coarse	40	4	9 HT 25323	6 99c	4.50	
		Asstd.*	40, 80, 120	6	9 HT 25325	5 99c	4.50	
7-in.	1/4-in.	Asstd.*	Asstd.	6	9 HT 2531	8 \$1.29	5.50	
8-in.	None	Fine	120	6	9 HT 25251	7 1.29	5.50	
		Med.	60	6	9 HT 25252	8 1.29	5.50	
		Coarse	40	5	9 HT 25253	11 1.29	5.50	
8-in.	3-in.	Asstd.*	120, 60, 40	6	9 HT 22732	9 1.49	6.50	
		Fine	120	6	9 HT 25301	10 1.59	7.00	
9-in.	None	Med.	60	6	9 HT 25302	12 1.59	7.00	
		Coarse	40	5	9 HT 25303	12 1.59	7.00	
10-in.	3-in.	Asstd.*	120, 60, 40	6	9 HT 22731	13 2.19	10.50	
Fiber-backed Alum. Oxide for longer wear than discs above.								
6-in.	1/4-in.	Med.	50	10	9 HT 25297	14 \$4.49	\$21.35	
7-in.	1/4-in.	Fine	80	10	9 HT 25299	1 2 4.99	21.99	
		Med.	50	10	9 HT 25291	1 10 5.29	23.99	
		Coarse	36	10	9 HT 25292	1 12 5.49	24.99	
9-in.	1/4-in.	Fine	80	10	9 HT 25287	2 3 7.49	33.99	
		Med.	50	10	9 HT 25288	2 6 7.99	35.99	
		Coarse	36	10	9 HT 25289	2 8 8.49	37.99	
Silicon-Carbide, open coat								
6-in.	1/4-in.	Coarse	16	3	9 HT 25324	5 99c	\$4.50	
Tungsten Carbide, bonded to thin steel								
5-in.	1/4-in.	Medium		1	9 HT 30091	4 \$1.49		
		Coarse		1	9 HT 30092	4 1.49		
6-in.	1/4-in.	Medium		1	9 HT 30093	4 1.59		
		Coarse		1	9 HT 30094	4 1.59		
Aluminum Oxide, pressure-sensitive with adhesive back								
8-in.	None	Fine	120	6	9 HT 25381	9 \$3.99		
		Medium	60	6	9 HT 25382	11 3.99		
		Coarse	40	6	9 HT 25383	13 3.99		

*2F, 2M, 2C *3F, 3M

Sanding Sheets for soft and hard woods, metal and water sanding . . . pad sanders or manual work

Quality-made sanding sheets with abrasives bonded to strong backings.

TYPE, GRIT, SIZE, ORDERING INFO:

Sheet type	Size	Grit	Grit Number	Catalog Number	Pkg. of	Wt. lbs. oz.	Price
Aluminum Oxide, paper-backed. For hard wood.							
	9x11 in.	X-Fine	150	9 HT 27421	100	4 13	\$11.99
	9x11 in.	Fine	100	9 HT 27422	100	6 7	11.99
	9x11 in.	Medium	60	9 HT 27423	100	10 2	11.99
	9x11 in.	Coarse	40	9 HT 27424	100	7 10	7.49
Aluminum Oxide, cloth-backed. For metal.							
	9x11 in.	Fine	120	9 HT 67821	50	4 10	16.99
	9x11 in.	Medium	80	9 HT 67822	50	6 2	16.99
	9x11 in.	Coarse	60	9 HT 67823	50	6 15	17.99
Garnet paper. For all woods.							
	9x11 in.	X-Fine	150	9 HT 67941	100	4 15	10.99
	9x11 in.	Fine	100	9 HT 67942	100	6 5	10.99
	9x11 in.	Medium	60	9 HT 67943	100	10 2	10.99
	9x11 in.	Coarse	40	9 HT 67944	100	7 10	7.99
Emery cloth. For metal.							
	9x11 in.	Fine		9 HT 67925	50	3 4	13.99
	9x11 in.	Medium		9 HT 67926	50	4 15	13.99
	9x11 in.	Coarse		9 HT 67927	50	4 15	13.99
Flint Sandpaper. For soft woods only.							
	9x10 in.	X-Fine		9 HT 67945	100	2 12	6.99
	9x10 in.	Fine		9 HT 67946	100	3 13	6.99
	9x10 in.	Medium		9 HT 67947	100	5 7	6.99
	9x10 in.	Coarse		9 HT 67948	100	4 12	3.99
Silicon Carbide Water-sand Finishing Paper.							
	9x11 in.	Super-Fine	400	9 HT 30121	100	2 12	15.99
	9x11 in.	X-Fine	320	9 HT 30122	100	2 15	15.99
	9x11 in.	Med. Fine	240	9 HT 30123	100	3 5	15.99
Non-loading Sandpaper.							
	9x11 in.	X-Fine	320	9 HT 67991	100	3 8	15.99
	9x11 in.	Fine	180	9 HT 67992	100	3 8	15.99
	9x11 in.	Medium	80	9 HT 67993	100	4 2	15.99
	9x11 in.	Coarse	50	9 HT 67994	50	3 12	8.99

Sanding Belts for portable and bench-type belt sanders

Aluminum oxide abrasive on all belts. Long lasting; fast cutting. Cloth back. One-piece. For portable and bench-type sanders. For wood, metal or plastic surfaces.

GRIT, SIZE, ORDERING INFORMATION:

Grit	Grit Number	Catalog Number	Wt. oz.	Price each	Price for 10
3x21 inches					
X-Fine	100	9 HT 22304	3	89c	\$8.49
Fine	80	9 HT 22301	3	89c	8.49
Medium	50	9 HT 22302	4	89c	8.49
Coarse	36	9 HT 22303	4	89c	8.49
X-Coarse	16	9 HT 22305	6	89c	8.49
4x24 inches. Best for wood.					
X-Fine	100	9 HT 22332	4	\$1.19	\$11.29
Fine	80	9 HT 22333	4	1.19	11.29
Medium	50	9 HT 22334	5	1.19	11.29
Coarse	36	9 HT 22335	6	1.19	11.29
X-Coarse	16	9 HT 22336	7	1.19	11.29
4x24 inches. Best for metal.					
X-Fine	100	9 HT 22337	4	\$1.19	\$11.29
Medium	60	9 HT 22338	5	1.19	11.29
Coarse	40	9 HT 22339	5	1.19	11.29
4x36 inches					
Fine	100	9 HT 22151	5	\$1.39	\$11.99
Medium	60	9 HT 22152	6	1.39	11.99
Coarse	40	9 HT 22153	7	1.39	11.99
6x48 inches					
Fine	100	9 HT 21671	8	\$2.29	\$19.99
Medium	60	9 HT 21672	9	2.29	19.99
Coarse	40	9 HT 21673	12	2.29	19.99
3x27 inches					
X-Fine	100	9 HT 22315	4	\$1.09	\$9.99
Fine	80	9 HT 22311	4	1.09	9.99
Medium	50	9 HT 22312	4	1.09	9.99
Coarse	36	9 HT 22313	5	1.09	9.99

Sanding Sheets cut to size for pad sanders

Aluminum Oxide. Paper back.

GRIT, SIZE, ORDERING INFORMATION:

Size in.	Grit	Grit No.	Catalog Number	Wt. oz.	Package of 12
3 1/2 x 9	Fine	320	9 HT 25131	3	79c
3 1/2 x 9	Medium	180	9 HT 25132	4	79c
3 1/2 x 9	Coarse	80	9 HT 25133	5	79c
3 1/2 x 9	X-Coarse	50	9 HT 25134	7	89c
4 1/2 x 11	Fine	320	9 HT 27401	4	89c
4 1/2 x 11	Medium	180	9 HT 27402	4	89c
4 1/2 x 11	Coarse	80	9 HT 27403	6	89c
4 1/2 x 11	X-Coarse	50	9 HT 27404	10	99c

Non-clogging. Fine grits silicon carbide; medium, coarse grits aluminum oxide. Paper back.

GRIT, SIZE, ORDERING INFORMATION:

Size in.	Grit	Grit No.	Catalog Number	Wt. oz.	Package of 12
3 1/2 x 9	Fine	180	9 HT 67645	5	\$1.09
3 1/2 x 9	Medium	80	9 HT 67646	6	1.09
3 1/2 x 9	Coarse	50	9 HT 67647	9	1.09
4 1/2 x 11	Fine	180	9 HT 67635	7	1.29
4 1/2 x 11	Medium	80	9 HT 67636	8	1.29
4 1/2 x 11	Coarse	50	9 HT 67637	11	1.29

Tungsten Carbide. Steel backing.

GRIT, SIZE, ORDERING INFORMATION:

Size in.	Grit	Grit No.	Catalog Number	Wt. oz.	Price Each
3 1/2 x 9	Fine		9 HT 30284	4	\$1.39
3 1/2 x 9	Medium		9 HT 30285	4	1.39
3 1/2 x 9	Coarse		9 HT 30286	4	1.39
4 1/2 x 11	Fine		9 HT 30096	6	2.29
4 1/2 x 11	Medium		9 HT 30097	6	2.29
4 1/2 x 11	Coarse		9 HT 30098	6	2.29

Non-woven. Steel mesh with abrasive.

GRIT, SIZE, ORDERING INFORMATION:

Size in.	Grit	Grit No.	Catalog Number	Wt. oz.	Price Each
3 1/2 x 9	Fine		9 HT 27441	3	\$9.99
3 1/2 x 9	Medium		9 HT 27442	3	1.49
3 1/2 x 9	Coarse		9 HT 27443	4	1.99
4 1/2 x 11	Fine		9 HT 27431	3	1.49
4 1/2 x 11	Medium		9 HT 27432	4	1.99
4 1/2 x 11	Coarse		9 HT 27433	5	2.49

(1) **Block Hand Sander Kit.** Molded rubber, ideal for sanding wood or metal. Includes six 2 1/4x9-inch sanding sheets: 2 fine, 2 medium, 2 coarse. ORDERING INFORMATION: Order extra 9x10 or 9x11-inch sheets at left.

9 HT 3683—Shipping weight 1 lb. Kit \$2.49

(2) **Steel Wool.** Very fine to coarse textures.

ORDERING INFORMATION: Package of 16 pads.

Texture	Catalog Number	Shipping weight	Package
Very Fine #0000	9 HT 67919	 14 oz.	\$1.97
Extra-Fine #000	9 HT 67911	1 lb. 1 oz.	1.77
Fine #0	9 HT 67912	1 lb. 1 oz.	1.37
Medium #1	9 HT 67913	1 lb. 1 oz.	1.37
Med. Coarse #2	9 HT 67914	1 lb. 1 oz.	1.37
Coarse #3	9 HT 67915	1 lb. 1 oz.	1.37

(3) **Sanding Drum for radial saws.** 3-inch face, 2 1/4-inch diameter. Screws on 1/2-20 threaded shaft. Expandable rubber drum. Medium-grit sanding sleeve. ORDERING INFORMATION: Shpg. wt. 1 lb. 1 oz.

9 HT 25246 \$5.50

Sanding Sleeves (not shown). Use with drum above.

Grit	Catalog Number	Shipping weight	Price, each
Fine	9 HT 25221	3 ounces	59c
Medium	9 HT 25222	3 ounces	59c
Coarse	9 HT 25223	3 ounces	59c

(4) **Pressure-sensitive Cement.** For holding sanding discs to metal plates. Stays tacky. Discs peel off after use. 8-ounce plastic squeeze bottle. ORDERING INFORMATION: Shipping weight 12 oz.

9 HT 2220 \$1.27



CRAFTSMAN® Drill Bits... heat-treated six times for the added strength and durability needed for wood and metal boring

Twist Drill Bits all have these outstanding features:

- Size stamps on each for identification
- High-speed steel throughout
- Precision-ground flutes for accurate hole sizes
- Black oxide finish acts as lubricant
- Precision-ground margin and point-relief for efficient drilling
- Point accurate to .002 tolerance
- Exceed Federal Specifications GGG-D-751 b for strength

(1) 115-piece Twist Drill Bit Set \$169.99

CONSTRUCTION: See features above.
SIZES: 60 wire-gauge bits from 1 thru 60; 29 fractional bits from 1/16 thru 1/2-in. by 64ths of an inch; 26 lettered bits A thru Z. Metal storage case.
ORDERING INFORMATION:
9 HT 67115—Wt. 9 lbs. 2 oz.Set \$169.99

(2) Twist Drill Bit Sets

CONSTRUCTION: See construction features above. Includes metal storage case.

29-pc. Set. Save \$8.26. Separate prices total \$38.25.

SIZES: 1/16 to 1/2-inch by 64ths of an inch. Jobber length.

ORDERING INFORMATION:
Shpg. wt. 3 lbs. 9 oz.
9 HT 6705Set \$49.99

21-pc. Set (not shown). Save \$2.00. Separate prices total \$26.51.

SIZES: 1/16 to 3/8-inch by 64ths of an inch. Jobber length.

ORDERING INFORMATION:
Shpg. wt. 1 lb. 11 oz.
9 HT 6719Set \$25.99

15-pc. Set (not shown). Save \$5.21. Separate prices total \$30.20.

SIZES: 1/16 to 1/2-inch by 32nds of an inch. Jobber length.

ORDERING INFORMATION:
Shpg. wt. 2 lbs. 2 oz.
9 HT 6720Set \$24.99

60-pc. Set (not shown).

SIZES: Wire-gauge sizes ranging from 1 thru 60.

ORDERING INFORMATION:
Shpg. wt. 1 lb. 8 oz.
9 HT 6708Set \$32.99

(3 thru 5) Twist Drill Bit Sets

CONSTRUCTION: See features above. Plastic case included.

(3) 17-pc. Set. Save \$1.57. Sep. prices total \$20.56.

SIZES: 1/16 to 1/4-in. by 64ths, 3/16, 3/8, 1/2-in. with short shanks turned down to 1/4-in. Jobber length.

ORDER INFO: Wt. 15 oz.
9 HT 6711Set \$18.99

(4) 13-pc. Set. Save \$1.00. Sep. prices total \$9.80.

SIZES: 1/16 to 1/4-in. by 64ths. Jobber length.

ORDER INFO: Wt. 8 oz.
9 HT 6639Set \$8.99

10-pc. Set (not shown). Save \$5.45. Sep. prices total \$6.94.

SIZES: 1/16 to 1/2-in. by 64ths of an inch, plus 3/16, 3/32, 1/4-in.

ORDER INFO: Wt. 7 oz.
9 HT 6638Set \$6.49

7-pc. Set (not shown). Save \$1.00. Sep. prices total \$5.30.

SIZES: 1/16 to 1/4-in. by 32nds of an inch.

ORDER INFO: Wt. 7 oz.
9 HT 6637Set \$4.49

(5) 4-pc. Set. Save \$7.00. Sep. prices total \$10.76.

SIZES: 1/16, 3/8, 1/2-in. with short shanks turned down to 1/4 of an inch.

ORDER INFO: Wt. 9 oz.
9 HT 67184Set \$9.99

(6) Individual Bits... Jobber length

Catalog No.	Diam.	Length	Wt.	Each	Catalog No.	Diam.	Length	Wt.	Each
9 HT 66901	1/16 in.	1 1/8 in.	3 oz.	39c	9 HT 66936	1/16 in.	4 3/8 in.	3 oz.	\$1.69
9 HT 66902	3/32 in.	2 in.	3 oz.	46c	9 HT 66937	3/32 in.	4 1/2 in.	4 oz.	1.99
9 HT 66903	1/8 in.	2 1/4 in.	3 oz.	52c	9 HT 66938	1/8 in.	4 3/4 in.	4 oz.	2.15
9 HT 66904	5/32 in.	2 1/2 in.	3 oz.	54c	9 HT 66939	5/32 in.	4 3/4 in.	5 oz.	2.55
9 HT 66905	3/16 in.	2 3/4 in.	3 oz.	58c	9 HT 66940	3/16 in.	5 1/8 in.	4 oz.	2.59
9 HT 66906	7/32 in.	2 7/8 in.	3 oz.	64c	9 HT 66941	7/32 in.	5 1/2 in.	5 oz.	2.79
9 HT 66907	1/4 in.	3 in.	3 oz.	69c	9 HT 66942	1/4 in.	5 3/4 in.	6 oz.	2.99
9 HT 66908	5/16 in.	3 1/4 in.	3 oz.	76c	9 HT 66943	5/16 in.	5 3/4 in.	6 oz.	3.25
9 HT 66909	3/8 in.	3 1/2 in.	3 oz.	83c	9 HT 66944	3/8 in.	5 3/4 in.	6 oz.	3.65
9 HT 66910	7/16 in.	3 3/4 in.	3 oz.	94c	9 HT 66945	7/16 in.	5 3/4 in.	6 oz.	4.09
9 HT 66911	1/2 in.	3 1/2 in.	3 oz.	\$1.06	9 HT 66946	1/2 in.	5 3/4 in.	6 oz.	4.39
9 HT 66912	3/4 in.	3 3/4 in.	3 oz.	1.16	9 HT 66947	3/4 in.	5 3/4 in.	5 oz.	3.49
9 HT 66913	1/2 in.	3 3/4 in.	3 oz.	1.16	9 HT 66948	1/2 in.	5 3/4 in.	7 oz.	4.69
9 HT 66914	3/4 in.	4 in.	4 oz.	1.23	9 HT 66949	3/4 in.	6 in.	7 oz.	5.19
9 HT 66915	1/2 in.	4 1/4 in.	4 oz.	1.40					
9 HT 66916	3/4 in.	4 1/4 in.	4 oz.	1.55					

(7) Individual Short-length Bits. With 1/4-in. turned-down shank.

SIZES. ORDERING INFO:
9 HT 66364—3/16-in. Wt. 2 oz.\$1.89
9 HT 66365—3/8-in. Wt. 2 oz.2.19
9 HT 66366—1/2-in. Wt. 3 oz.2.99
9 HT 66367—1/2-in. Wt. 4 oz.3.69

(8) Individual Large-diameter Bits. Turned-down shanks fit 1/2-in. electric drills... 6 in. long.

SIZES. ORDERING INFO:
9 HT 67151—3/8-in. Wt. 8 oz.\$7.99
9 HT 67152—1/2-in. Wt. 9 oz.9.99
9 HT 67153—1-in. Wt. 13 oz.15.99

Metric Drill Bits

Catalog No.	Diam.	Length	Wt.	Each	Catalog No.	Diam.	Length	Wt.	Each
9 HT 66951	3.3mm	2 7/8 in.	4 oz.	59c	9 HT 66959	8.5mm	4 3/4 in.	3 oz.	\$2.59
9 HT 66952	4.1mm	3 1/4 in.	4 oz.	74c	9 HT 66960	8.7mm	4 3/4 in.	3 oz.	2.69
9 HT 66953	4.2mm	3 1/4 in.	3 oz.	79c	9 HT 66961	9.0mm	4 3/4 in.	3 oz.	2.79
9 HT 66954	5.0mm	3 3/4 in.	3 oz.	99c	9 HT 66962	10.5mm	5 3/8 in.	4 oz.	3.99
9 HT 66955	6.0mm	4 in.	3 oz.	\$1.29	9 HT 66963	12.0mm	5 3/8 in.	5 oz.	4.99
9 HT 66956	6.7mm	4 1/8 in.	3 oz.	1.49	9 HT 66964	12.8mm	6 in.	5 oz.	6.99
9 HT 66957	7.7mm	4 1/2 in.	3 oz.	2.09	9 HT 66965	14.0mm	6 3/8 in.	5 oz.	7.99
9 HT 66958	8.0mm	4 3/4 in.	3 oz.	2.19					

(9) Steel Bit Case. For 29-pc. jobber length set above. Lifting lid raises bits. Sizes by 64ths; decimal equivalents. Gray. Meets Fed. Specs. GGG-C-116b for durability.

ORDER INFO:
Shpg. wt. 1 lb. 6 oz.
9 HT 66852\$2.99

(10) CRAFTSMAN All-steel Bit Case. Size and decimal equivalents. Tap drill table. Silver, black enamel finish. Meets Fed. Specs. GGG-C-116b for durability.

CAPACITIES. ORDERING INFORMATION:
For 29 Bits, 1/16 to 1/2-inch by 64ths.
9 HT 66878—Wt. 3 lbs. 3 oz.\$9.99
For 60-wire gauge Bits. Sizes 1 to 60.
9 HT 66879—Wt. 1 lb. 11 oz.\$7.99

(11) CRAFTSMAN Electricians' Bits. Carbon steel. For drilling in wood only. 18 in. long. Drills in walls, floors. SIZES. AND ORDERING INFORMATION:
1/4-in. diam. Fits 1/4, 3/8, 1/2-in. chucks.
9 HT 66931—Wt. 8 oz.\$5.29
1/2-in. diam. Fits 3/8-in. larger chucks.
9 HT 66932—Wt. 12 oz.\$7.49
3/4-in. diam. Fits 3/8, 1/2-in. larger chucks.
9 HT 66933—Wt. 14 oz.\$10.59

(12) 12-pc. CRAFTSMAN Wood Screw Pilot Bit Set

To countersink, counterbore. SIZES: For Nos. 4, 5, screws (1/2, 3/4, 1 in. deep); for Nos. 6, 7, screws (3/8, 1, 1 1/4 in. deep); for Nos. 8, 9 screws (3/4, 1, 1 1/4 in. deep); for Nos. 10, 11, 12 screws (1, 1 1/4, 1 1/2 in. deep).

ORDERING INFORMATION:
9 HT 4201—Wt. 13 oz.Set \$7.49

5-pc. Set

SIZES: For Nos. 4, 5, screws (3/4 in. deep); for Nos. 6, 7 screws (3/4 in. deep); for Nos. 8, 9 screws (1 and 1 1/4 in. deep); for Nos. 10, 12 screws (1 1/2 in. deep).

ORDERING INFORMATION:
9 HT 4203—Wt. 7 oz.Set \$3.99

(13) 6-piece CRAFTSMAN Power Woodboring Bit Set

Hardened steel alloy, 6 1/2 in. long. Precision-ground cutting edges, surfaces. Brad points for no-jump starts. For 1/4, 3/8, 1/2-in. drill or drill press. For extensions, see opposite page. Includes vinyl storage pouch.

SIZES: 3/8, 1/2, 3/4, 1, 1 1/4 in. ORDERING INFORMATION:
9 HT 2092—Wt. 14 oz.Set \$7.99

Individual Power Woodboring Bits

Catalog Number	Size	Shipping weight	Each
9 HT 2093	3/8-in.	4 oz.	\$1.09
9 HT 2094	1/2-in.	4 oz.	1.19
9 HT 2095	3/4-in.	4 oz.	1.29
9 HT 2096	1-in.	4 oz.	1.39
9 HT 2097	1 1/4-in.	4 oz.	1.49
9 HT 2098	1 1/2-in.	4 oz.	1.59
9 HT 20982	1 3/4-in.	4 oz.	1.79
9 HT 20983	2-in.	5 oz.	1.89

(14) 7-pc. Woodboring Bit Set. Precision-ground... bores up to 5 inches deep. For 1/4-in. or larger electric drills. From Japan. Includes plastic pouch.

SIZES: 3/8, 1/2, 3/4, 1, 1 1/4 in. ORDERING INFORMATION:
9 HT 2087—Wt. 1 lb.Set \$6.99

4-pc. Set. From Japan.

SIZES: 3/8, 1/2, 3/4, 1-in. ORDERING INFORMATION:
9 HT 2086—Wt. 9 oz.Set \$4.99

Bits for masonry and non-ferrous metals

(15 thru 17) CRAFTSMAN Masonry, Non-ferrous Metal-boring Bits

Tungsten-carbide tips drill brick, stone, concrete, wallboard, cast-iron. Special flutes remove chips. Pouch included.

(15) 7-pc. Bit Set

SIZES: 3/16x3, 1/4x4, 5/16x4, 3/8x4-in.; 1/4-in. shanks. 1/2x6, 3/4x6, 1/2x6-in.; 3/8-in. shanks.

ORDERING INFORMATION:
9 HT 67347—Wt. 1 lb. 8 oz.Set \$10.99

(16) 5-pc. Bit Set

SIZES: 3/16x3, 1/4x4, 5/16x4, 3/8x4, 1/2x4-in.; 1/4-in. shanks. ORDERING INFORMATION:
9 HT 67344—Wt. 8 oz.Set \$4.99

(17) 3-pc. Bit Set

SIZES: 3/16x3, 1/4x4, 5/16x4-in.; 1/4-in. shanks. ORDERING INFORMATION:
9 HT 67343—Wt. 5 oz.Set \$2.49

Individual Carbide-tipped Bits

Catalog Number	Size	Shank in.	Length in.	Wt. oz.	Each
9 HT 67085	3/16	3/16	3	3	79c
9 HT 67328	1/4	1/4	4	2	99c
9 HT 67087	1/4	1/4	4	3	\$1.19
9 HT 67086	3/8	3/8	4	4	1.19
9 HT 67325	1/2	1/2	6	6	1.89
9 HT 67088	3/4	3/4	6	9	2.99
9 HT 67089	1	1	6	10	3.49






(18) 13-in. Fluted Carbide-tipped Bits. 1/4-in. shanks except 1/2-in. size (3/8-in. shank). SIZES. ORDERING INFORMATION:
9 HT 67381—1/4-in. Wt. 8 oz.\$2.49
9 HT 67382—1/2-in. Wt. 8 oz.2.99
9 HT 67383—3/4-in. Wt. 10 oz.3.29
9 HT 67384—1-in. Wt. 12 oz.3.49

6 7 8

118 Sears

COMPACT SLAEGD

Accessories to Buff, Sand and Polish



(1) **Sander-Polisher-Buffer.** Fits 1/4, 3/8-in. drills. Threads on 3/8x24-chuck spindle or attaches to drill chuck. High-impact plastic housing. 2:1 gear ratio for polishing, 1:1 ratio for sanding. SET COMPOSITION: 2 position side handle, chuck adapter, 5-in. rubber back-up pad, wool polishing bonnet, 6 assorted sanding discs. 9 HT 26272—Shpg. wt. 2 lbs. 4 oz. . . . Set \$8.99

(2) **CRAFTSMAN Angle Drill Head.** Excellent for hard-to-get-at areas. Fits 1/4 or 3/8-inch electric drills. Works at 90° angle. High-impact plastic housing, 2-position side handle. 9 HT 26271—Shpg. wt. 1 lb. 10 oz. . . . \$6.99

(3) **CRAFTSMAN Fine Finishing Kit . . . 5-in. diameter.** For fine finishes on cars, new or refinished wood, metal. Includes three 5-inch diameter sanding discs, activator cement, lambs' wool polishing bonnet, rubber back-up pad . . . swivel joint flexes up to 30° angle; no center hole eliminates swirl marks. For 1/4 to 1/2-in. drills. No adapter required. 9 HT 28476—Shpg. wt. 1 lb. 1 oz. . . . Kit \$5.49

(4) **CRAFTSMAN 100% Lambs' Wool Polishing Bonnets.** Fit over rubber back-up discs (not included).

SIZES AND ORDERING INFORMATION:

Catalog No.	Fits discs	Pile size	Shpg. wt.	Each
9 HT 2520	3 1/2 to 4 inches	1-inch	3 oz.	89c
9 HT 2521	4 to 5 1/2 inches	1-inch	3 oz.	\$1.29
9 HT 2527	6 inches	1-inch	4 oz.	1.99
9 HT 2528	7 inches	1 1/4-inch	5 oz.	2.49

(5) **CRAFTSMAN Buffing Pad.** 5-in. diam. Lamb's wool polishing bonnet. Plastic back-up pad with spindle; fits directly into drill chuck. 1/4-in. spindle fits all drills. 9 HT 64935—Shpg. wt. 5 oz. . . . \$2.49

(6) **Sanding Drum.** Use with safelock or collet chuck; 1-in. face, 1/4-in. plain spindle, 1 1/2 in. long. Abrasive sleeve over expanding rubber drum. DRUM SIZES AND ORDERING INFORMATION:

9 HT 2497	1 1/2-in. diameter	Wt. 5 oz.	\$2.79
9 HT 2498	2 1/8-in. diameter	Wt. 8 oz.	3.50

(7) **Sanding Sleeve.** Use with (6); 1 1/2-in. dia. GRITS AND ORDERING INFO: Package of 6.

9 HT 24421	Fine	Wt. 4 oz.	Pkg. 99c
9 HT 24422	Medium	Wt. 4 oz.	Pkg. 99c
9 HT 24423	Coarse	Wt. 4 oz.	Pkg. 99c

Sanding Sleeve . . . 2 1/8-in. diam. Medium grit. ORDERING INFORMATION: Package of 6.

(8) **Shank-mounted Buff.** 50-ply muslin. 9 HT 64982—3-in. diam. Shpg. wt. 5 oz. . . \$1.59

(9) **Shank-mounted Polishing Wheel.** Hard felt. Measures 1 1/2x1 inches; 1/4-inch shank. 9 HT 64991—Shipping weight 3 oz. . . . \$2.29

(10) **Wire Wheel Brushes.** For paint, burr removal, cleaning, polishing lathed work pieces. 3-inch diameter; 1/4-inch spindle. WIRE GAUGES, ORDERING INFORMATION:

9 HT 64902	Fine	Shpg. wt. 6 oz.	\$1.99
9 HT 64903	Coarse	Shpg. wt. 6 oz.	1.99

(11) **Wire Cup Brushes.** For cleaning, polishing, paint and burr removal, 1 3/4-inch diameter; 1/4-inch shank. WIRE GAUGES AND ORDERING INFO:

9 HT 64882	Fine	Shpg. wt. 5 oz.	\$1.99
9 HT 64883	Coarse	Shpg. wt. 5 oz.	1.49

(12) **Wire Cup Brush.** Coarse wire for rust, paint removal, pitted surfaces. 2 3/4-inch diam. 9 HT 64961—Shipping weight 9 ounces . . \$1.99

(13) **CRAFTSMAN Twisted End Brush.** Removes scale, carbon, slag. Steel; 1 1/8-in. diam. 9 HT 64842—Shipping weight 9 ounces . . \$3.49

(14) **Hole Square.** Groove in steel plate guides bits up to 3/8 inch in diameter. 9 HT 2596—Shipping weight 5 ounces . . . 49c

(15) **CRAFTSMAN® Doweling Jig.** Holes for 3/16 thru 1/2-inch drill bits. Revolving turret, 4-inch capacity. 6 1/4x3x2 1/4-inch cast aluminum alloy frame for straight drilling. 9 HT 4186—Shipping wt. 2 lbs. 7 oz. . . \$14.99

(16) **Screwdriver Bit and Socket Set.** Save time and effort in driving screws. For 1/4-inch and larger electric drills. Includes two spade bits with finders for Nos. 6 thru 10 slotted screws; Phillips bits Nos. 1, 2; adapter for 1/4-inch square drive; seven 6-point sockets (sizes 3/16 to 1/2-inch). 1/4-inch hex shank. Plastic case. ORDER INFO: CRAFTSMAN except sockets. 9 HT 25651—Shipping wt. 10 oz. . . . Set \$5.91

Screwdriver Bit Set. For 1/4-inch and larger electric drills. Includes two spade bits with finders for Nos. 6 thru 10 slotted screws; Phillips bits Nos. 1, 2; adapter for 1/4-inch square drive. Plastic case. 9 HT 2565—Shipping wt. 8 oz. . . . Set \$3.99

Drill Bit Sharpeners

Extend the life of your carbon and high-speed steel twist drill bits.

Choose Electric or Drill-operated Sharpener.

(17 and 18) For use with CRAFTSMAN and other drill bits. Accepts sizes 1/8, 9/64, 5/32, 11/64, 3/16, 1/2, 5/8, 3/4, 7/8, 1 1/8, 1 1/4 and 1 1/2-inch. Resharpens dull or broken carbon and high-speed steel twist drill bits. Not for resharpening carbide-tipped bits.

(17) Electric Bit Sharpener

HOW TO OPERATE: Place bit through proper-sized hole and apply pressure to sharpen. Motor develops maximum 1/2 HP at 3000 rpm.

ELECTRICAL INFORMATION: Double-insulated. Needs no grounding. 110-120-volts, 60-Hz. AC. 75 watts. UL listed. 5-foot, 2-wire cord.


ORDERING INFORMATION: Shipping weight 2 lbs. 9 oz. 9 HT 6682 . . . \$29.99

(18) Drill-operated Bit Sharpener

HOW TO OPERATE: Your own drill provides the power for the grinding wheel. Tighten drill chuck around shaft at sharpener bottom, then place bit through proper-sized hole at sharpener top and turn on drill. Fits most makes of 1/4 or 3/8-inch drills (drills not included).

ORDERING INFORMATION: Shipping weight 2 lbs. 9 oz. 9 HT 6680 . . . \$14.99

Drill-operated Bit Sharpener \$14.99

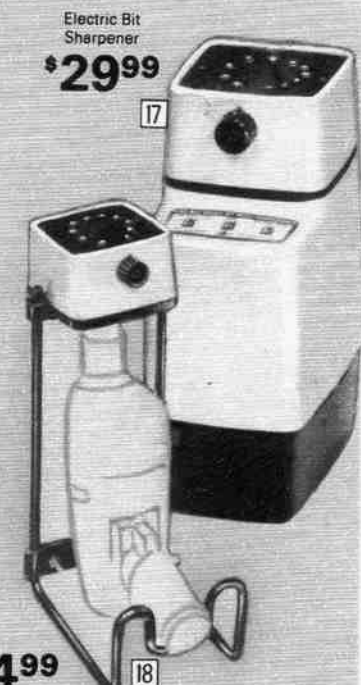

Special Bits and Attachments

(19) **CRAFTSMAN 5-pc. Screw Extractor Set.** Nos. 1 thru 5 square shanks. Steel alloy. Plastic case. 9HT67372—Shpg. wt. 7 oz. . . Set \$4.99

(20) **12-inch Power Bit Extension.** For 1/4-in. shank bits. For 1/4-in. or larger drill . . . 3/8-in. diameter socket. 9 HT 2090—Shpg. wt. 10 oz. . . \$1.99

(21) **CRAFTSMAN Arbors.** Hold grinding and wire wheels. With 1/2x20-thread shaft. SIZES AND ORDERING INFO:

Catalog No.	Flange	Shank	Weight	Price
9 HT 2594	1 1/8 in.	1/4 in.	8 oz.	\$1.99
9 HT 2590	2 in.	3/8 in.	15 oz.	1.99

(22) **Hole Saw Attachment.** Heat-treated steel. For wood, plastics, wall-board, plumbing. Use with mandrels (23) below. SIZES AND ORDERING INFO:

Catalog No.	Size	Shpg. wt.	Price
9 HT 2578	3/4-in.	4 oz.	\$1.29
9 HT 25781	1-in.	4 oz.	1.29
9 HT 25782	1 1/8-in.	4 oz.	1.29
9 HT 25783	1 1/4-in.	5 oz.	1.39
9 HT 25784	1 1/2-in.	5 oz.	1.39
9 HT 25785	1 3/4-in.	5 oz.	1.49
9 HT 25786	1 7/8-in.	5 oz.	1.49
9 HT 25787	2-in.	6 oz.	1.49
9 HT 25788	2 1/8-in.	6 oz.	1.59
9 HT 25789	2 1/2-in.	6 oz.	1.69

(23) **Mandrels for Hole Saw Attachments.** (22) above. 1/4-in. shanks. Size 1 for 3/4 to 1 1/8-in. saws. Size 2 for 1 1/4 to 2 1/2-in. saws. Includes pilot bit. SIZES AND ORDERING INFO:

9 HT 2562	Size 1	Wt. 5 oz.	\$3.29
9 HT 25621	Size 2	Wt. 5 oz.	3.79

(24) **Heavy-duty Hole Saw Attachment.** High-speed hole saws for cutting machineable steel, brass, bronze, plastics, wood, aluminum, iron. Use with mandrels (25) below. Knock-out slots. SIZES AND ORDERING INFO:

Catalog No.	Size	Shpg. wt.	Price
9 HT 2577	3/4-in.	4 oz.	\$3.29
9 HT 25771	7/8-in.	4 oz.	3.29
9 HT 25772	1-in.	5 oz.	3.59
9 HT 25773	1 1/8-in.	5 oz.	3.69
9 HT 25774	1 1/4-in.	6 oz.	3.89
9 HT 25775	1 1/2-in.	6 oz.	3.99
9 HT 25776	1 3/4-in.	7 oz.	4.49
9 HT 25777	1 7/8-in.	6 oz.	4.49
9 HT 25778	2-in.	7 oz.	5.49
9 HT 25779	2 1/2-in.	8 oz.	6.49

(25) **Mandrels for Hole Saw Attachments (24) above.** Size 1 with 3/8-inch shank for 3/4 to 1 1/2-inch diameter saws. Size 2 with 1/2-inch shank for 1 to 2 1/2-inch diameter saws. Pilot drill bit. SIZES AND ORDER INFO:

9 HT 25626	Size 1	Wt. 5 oz.	\$3.29
9 HT 25627	Size 2	Wt. 6 oz.	4.29

Replacement Pilot Bit for (25). ORDERING INFORMATION: 9 HT 25629—Wt. 3 oz. . . . \$1.49


(26) **Drum File.** For 1/4-in. or larger electric drill or drill press. Measures 1 1/2x2 inches in diameter. ORDERING INFORMATION: 9 HT 67725—Shpg. wt. 5 oz. . . \$3.99

(27) **CRAFTSMAN High-speed Countersink Bit.** Machined steel, centerless ground. Cuts wood, metal. Five flutes, 82° angle; 1/4-in. shank. SIZES AND ORDER INFO:

9HT67161	1/2-in. diam.	Wt. 3oz.	\$3.29
9HT67162	5/8-in. diam.	Wt. 4oz.	3.99
9HT67163	3/4-in. diam.	Wt. 4oz.	4.49

Whatever the job, your CRAFTSMAN® Drill can do more with accessories on these pages

YOU CAN DO MORE...

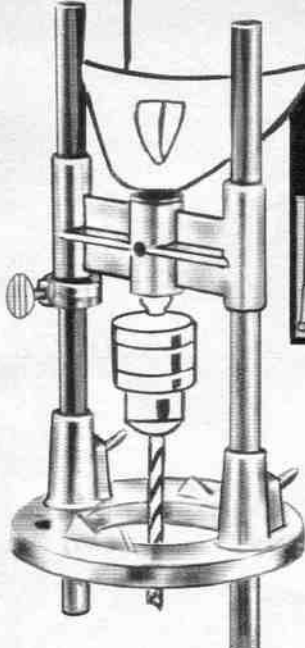

Portalign® Drill Stand

Holds portable 1/4 and 3/8-inch drills steady, for accurate perpendicular and exact-angle holes... even on very narrow stock



Portalign® Drill Stand \$19.99 without drill

USE: Portalign Drill Stand helps you to make perfect holes when cutting even the most difficult stock. Sturdy steel and cast aluminum construction gives you great support, yet the stand is lightweight enough to be easily hand-held. Fits 1/4 and 3/8-inch drills. Drill at 90° to the surface or at precise angles. With correct bits, Portalign® allows your drill to be used as a sander, shaper and drill press.

CONSTRUCTION: Adjustable depth control. Steel rods. Cast alum. base.

ASSEMBLY: Remove chuck, attach drill into threaded shaft of carriage.

ORDERING INFORMATION: Drill not included.

9 HT 11224—Shipping weight 2 pounds 5 ounces \$19.99



(1) Nail Spinner

USES: Nail Spinner sets in finishing nails without pre-drilling. Spinning in nails saves you both time and effort; and because you're not pounding a nail in, cracking and splitting are less likely to occur. Use for your fine finishing tasks; trims, moldings, picture frames and decorative pieces.

HOW IT WORKS: Unit chucks firmly into your 1/4 or 3/8-inch drill. Nail is gripped in place by an assembly of 3 balls. Use four, six, eight or ten penny finishing nails.

CONSTRUCTION: Heavy-duty steel.

ORDERING INFO:

Shipping wt. 6 oz.
9 HT 2601 \$4.99



(2) Venting Tool. Drills holes in siding so vents (3) may be inserted. Tool positions your electric drill at proper angle to drill up through butt of siding.

CONSTRUCTION: Heavy-duty plastic with aluminum bearings. Includes 3/8-inch bit.

ORDERING INFORMATION: Use with 3/8-inch vents sold below.

30 HT 44716—Wt. 1 lb. 3 oz. \$11.49

Extra 3/8-inch Bit (not illustrated). 9 in. long.
30 HT 44719—Wt. 4 oz. \$3.29

(3) Plastic 3/8-inch Vents

Tiny vents you insert in your home's wood siding can end paint blistering by allowing trapped water vapor to escape. Includes insert-ing tool. Plastic. Package of 100 vents.

30 HT 44717—Wt. 4 oz. Pkg. \$2.99

Before painting your home's exterior, send for FREE booklet 30 HT 7295.

It explains causes of blistering and mildew, and how to combat them with items (2) and (3) above.



(4) Bench Stand for 1/4, 3/8-inch drills. Holds drill steady so both hands are free to position work. Use to wirebrush, sand, sharpen. Takes 3-in. diameter wirebrush (not incl.).

CONSTRUCTION: Polyethylene. Includes bolts for mounting to workbench.

ORDERING INFORMATION: Drill and wirebrush are not included.

Shpg. wt. 1 lb. 6 oz.
9 HT 25911 \$2.99

(5) Cord Lock

Helps prevent your portable electric tools from disconnecting from extension cords. For use with all types of electric tools and appliances. Plastic construction.

ORDERING INFORMATION: Shipping weight 4 ounces.
9 HT 2595 69c

CRAFTSMAN® Drill Stands

Rigid tubular steel columns and die-cast aluminum bases let you convert your drill to a drill press for great accuracy in precision drilling tasks

(6) Heavy-duty Drill Stand

For all 1/4, 3/8 and 1/2-inch drills.

COLUMN, BASE: Tubular steel column 20 in. high. Adjustable rack-and-pinion depth control locks from 0 to 2 1/2 in. Throat depth 6 in. Die-cast aluminum base is 7 1/2 x 7 1/2 in.

SWING-AWAY TABLE: Tilts and locks in any position.

ORDERING INFORMATION: Unassembled. Drill is not included.

9 HT 25987C—Shpg. wt. 17 lbs. \$47.99

Stand (6) plus Drill 9 HT 1149 on pg. 123. Separate prices total \$117.49.

Shipping weight 27 pounds.
9 HT 11492C2 \$109.99

Stand (6) plus Drill 9 HT 1051 on pg. 122. Separate prices total \$92.49.

9 HT 10514C2—Shpg. wt. 21 lbs. \$87.49

(7) Medium-duty Drill Stand with 2 positions. Drill in vertical position; sand, grind in horizontal. For 1/4 or 3/8-in. pistol grip drills.

COLUMN, BASE: Tubular steel column 18 in. high. Locking depth gauge from 0 to 2 1/2-inch with automatic return. Throat depth 4 1/2 inches. With protective grinding guard. Die-cast aluminum base 6x6 inches.

SWING-AWAY TABLE: Tilts and locks in any position.

ORDERING INFORMATION: Sent unassembled. Drill not included.

9 HT 25926—Shpg. wt. 9 lbs. 2 oz. \$26.99

Stand (7) plus Drill 9 HT 1051 on pg. 122. Stand unassembled. Sep. prices total \$71.49.

9 HT 10515—Wt. 13 lbs. 2 oz. \$66.49

Stand (7) without swing-away table. Unassembled. Shpg. wt. 8 lbs. 5 oz.

9 HT 25927 \$19.99

Stand 9 HT 25927 above plus Drill 9 HT 1051 on pg. 122. Stand sent unassembled. Separate prices total \$64.49.

Shipping weight 12 lbs. 5 oz.
9 HT 10516 \$59.49

CRAFTSMAN® Tool Cases with sturdy polyethylene walls... won't rust, crack or

Circular Saw Case

\$14.99



AT LEFT: Case (8), (9) and (10)

(8) Circular Saw Case. Fits all Sears portable circular saws except 9-1187 and 9-1188... for these use Multiple-tool Case (13) shown at right. Compartment for blades, dado set, cut-off wheels. 15x12 1/2 x 10 1/2 in. high.

ORDERING INFO: Shpg. wt. 4 lbs.
9 HT 1453 \$14.99

(9) Single-tool Case. Holds power planer, standard 1/2-in. drill, 3-in. belt sander, 4 1/2 x 9-in. pad sander, reciprocating saw, electric impact tool or 6-in. disc sander. 17 1/2 x 9 1/2 x 10 1/2 in.

ORDERING INFORMATION:
9 HT 1454—Wt. 3 lbs. 6 oz. \$14.99

(10) Electric Impact Tool Case. Fits electric impact tools sold on page 110 of this catalog. 16x13 1/2 x 5 in. high.
ORDER INFO: Wt. 3 lbs. 14 oz.
9 HT 1456 \$9.99

AT RIGHT: (11), (12), (13)

(11) Sabre Saw or Pad Sander Case

Holds your sabre saw, drill or pad sander. Compartment for sand paper, blades and edge guides. To help keep your accessories in order. Measures 14 1/2 x 9 1/2 x 10 1/2 inches overall.

ORDERING INFO:
Shpg. wt. 2 lbs. 13 oz.
9 HT 1459 \$10.99

(12) Router Case

Slots in lid to hold bits. Measures 13x11x7 inches overall. Fits routers sold on page 135 of this catalog.

ORDERING INFO:
Shipping weight 3 lbs.
9 HT 1458 \$10.99

(13) Multiple-tool Case

Holds 1, 2 or 3 tools at once, depending on the size of your tools. Fits sanders, polishers, electric hand saws, drills, routers and most portable power tools sold in this catalog; with the following exceptions (9-1148, 9-1810, 9-1811, 9-1813 or 9-1113). For these use carrying case (9) at left. Unit measures 21 1/2 x 12 1/2 x 12 3/4 inches high overall.

ORDERING INFORMATION:
Shpg. wt. 11 lbs.
9 HT 1457C \$24.99

Single-tool Case

\$14.99



Electric Impact Tool Case

\$9.99



YOU CAN DO MORE...



Bore in wood. See bits on pg. 118



Buff and Polish. See polishing bonnets on pg. 119



Cut circles. See hole saws on pg. 119



Clean metal of rust, paint. See wire brushes on pg. 119



Sand wood. See sanding drums on pg. 119




Drill masonry. See bits on page 118

Whatever the job, your CRAFTSMAN Electric Drill or Drill Press can do more with Accessories on pages 118-120

Heavy-duty Stand for all $\frac{1}{4}$, $\frac{3}{8}$ and $\frac{1}{2}$ -inch Drills

\$47⁹⁹

without drill or bits

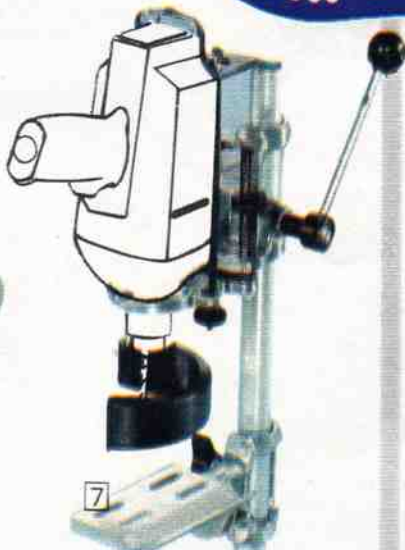

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details



Stand adjusts to horizontal

Medium-duty Stand with 2 positions . . . for $\frac{1}{4}$ and $\frac{3}{8}$ -inch pistol-grip drills

\$26⁹⁹

without drill or bits

dent even in extreme temperatures from -84° to $+185^{\circ}$ F.



Sabre Saw or Drill and Pad Sander Case

\$10⁹⁹

Router Case holds router compactly

\$10⁹⁹

\$24⁹⁹

Multiple Tool Case

Router Case

Motorized Drill Press

- Double-insulated motor develops maximum $\frac{1}{3}$ HP
- Front-mounted slide action control for variable speeds from 1000 to 2000 rpm
- Automatic speed regulator



\$69⁵⁰ without vise or bits

(14) CRAFTSMAN Portable $\frac{3}{8}$ -inch Drill Press

MOTOR, HOUSING: Develops maximum $\frac{1}{3}$ HP with variable speeds of 1000 to 2000 rpm. Automatic regulator maintains speed under heavy loads. Motor housing of high-impact polymer. Drill press has sleeve bearing construction.

HEAD, COLUMN, BASE: Locking depth gauge with 0 to $3\frac{3}{4}$ -inch depth range. Safety lock on 18-inch steel column. Slotted die-cast aluminum base, rubber bushings. Handle mounts on right or left hand side of drill. Storage tray at top of press for drill bits, measures $6 \times 3\frac{3}{4} \times 1$ -in. deep.

ELECTRICAL INFO: Double-insulated . . . no grounding needed. 110-120-v. 285-w. 60 Hz. AC. UL listed. 6-ft. 2-wire cord.

ORDERING INFO: Vise, bits not incl. See warranty, p. 123.

9 HT 1197—Shipping weight 9 pounds 2 ounces \$69.50

(15) Vise. Bolt to drill press (bolts not included). Steel-faced jaws open to 3 inches. Cast-iron base. 8 inches long.

ORDERING INFORMATION:

9 HT 2757—Shipping weight 8 pounds 2 ounces \$19.99

Play it safe!

Wear protective goggles or glasses when using drill accessories on these 2 pages. See safety equipment page 75.

Cut holes... see item (22)
on page 119.

Drive and
remove screws
... see item (18)
on page 119.

Remove rust... see
item (10) on page 119.

Polish...
see item (3)
on page 119.

Sand...
see item (6)
on page 119.

Whatever the job... your CRAFTSMAN
Drill can do more with Accessories
on pages 118 thru 120.

YOU CAN DO MORE...

CRAFTSMAN® 3/8-inch Drills

With these features drill users want most:

- Trigger-controlled variable speed
- Reversibility for removing screws and stuck bits
- Ball and sleeve bearings for long life



1/5-HP
\$29⁵⁰



1/3-HP
\$44⁵⁰



*Sears * Best*

3/8-HP
\$59⁵⁰

1/5-HP, Variable-speed Drill

MOTOR, BEARINGS, GEARS: Motor develops maximum 1/5 HP. Permanently lubricated ball thrust and sleeve bearings. Double-reduction spur gearing. Pressure on trigger controls variable no-load speeds from 0 to 1200 rpm. Trigger locks for continuous operation... releases quickly. Reversible for backing out bits and screws.

CHUCK: 3/8-inch capacity. Geared chuck threaded for 3/8-inch x 24 spindle.

HOUSING: Thermoset polyester.

ELECTRICAL INFORMATION: Double insulated. 110-120 volts, 60 Hz., AC. 264 watts. UL listed. With 6-foot, 2-wire cord.

ORDERING INFORMATION: See warranty and safety note on facing page.

9 HT 1144—Wt. 3 lbs. 15 oz. \$29.50

Non-reversible 1/5 HP Drill. (Not shown)

Like above except non-reversible.
9 HT 1143—Wt. 3 lbs. 10 oz. \$19.50

1/3-HP, Variable-speed Drill

MOTOR, BEARINGS, GEARS: Motor develops maximum 1/3 HP. Permanently lubricated ball and sleeve bearings. Double-reduction spur gearing for smooth, quiet power transmission. Externally accessible brushes for easy checking or replacement. Pressure on trigger controls variable no-load speeds from 0 to 1200 rpm. Trigger locks for continuous operation, releases quickly. Reversing switch for backing out screws, bits.

CHUCK: 3/8-inch capacity. Geared chuck threaded for 3/8-inch x 24 spindle.

HOUSING: Glass-reinforced thermoset polyester motor housing and die cast aluminum gear housing.

ELECTRICAL INFORMATION: Double insulated. 110-120 volts, 60 Hertz, AC. 300 watts. UL listed. With 6-foot, 2-wire cord.

ORD. INFO: See warranty, safety note on facing page.

9 HT 1051—Shipping weight 4 pounds \$44.50

1/4-HP Drill. Like drill above except with sleeve bearings, stamped cup chuck. Motor develops 1/4 HP.

9 HT 1049—Shipping weight 4 pounds \$39.50

3/8-HP, Variable-speed Drill

MOTOR, BEARINGS, GEARS: Motor develops maximum 3/8 HP. Permanently lubricated 100% ball, sleeve and roller bearings for long life. Double reduction helical gears for the smoothest, quietest power transmission possible. Externally accessible motor brushes for easy checking or replacement. Pressure on trigger control gives variable no-load speeds from 0 to 1200 rpm. Trigger locks for continuous operation... releases quickly. Reversing switch for backing out stuck bits, removing screws.

CHUCK: 3/8-inch capacity. Geared chuck threaded for 3/8-inch spindle. Pin-type spindle for quick and easy chuck removal.

HOUSING: Glass-reinforced thermoset polyester motor housing; die-cast aluminum gear housing. Includes removable top-assist handle for 2-hand control.

ELECTRICAL INFORMATION: Double insulated. 110-120 volts, 60 Hertz, AC. UL listed. 6-foot, 2-wire neoprene cord.

ORDER INFO: Warranty and safety note on facing pg.
9 HT 1148—Shpg. wt. 5 lbs. 9 oz. \$59.50



CRAFTSMAN® 3/8-inch
Rotary Hammer Drill
\$69⁵⁰

Rotary action for wood
or metal, hammer action
for brick or concrete...
flip a switch to reverse

Rotary-drill in wood, plastic, light metals. Hammer-drill at 21 impacts per revolution in brick, concrete, tile, stone.

MOTOR, BEARINGS, GEARS: Develops maximum 3/8 HP. Permanently lubricated ball, roller, sleeve bearings. Double reduction helical, spur gearing. Variable speeds, 0 to 1200 rpm, no load. Trigger locks. Reversible for backing out stuck bits, screws.

CHUCK: 3/8-in. capacity. Geared chuck threaded for 3/8-inch x 24 spindle. Pin-type spindle lock.

HOUSING: Heat-resistant polyester motor housing, aluminum gear housing. Depth gauge mounted on side.

ELECTRICAL INFO: Double insulated. 110-120 volts, 60 Hz., AC. 384 watts. UL listed. 6-ft., 2-wire neoprene cord.

ORDERING INFO: See warranty and safety note on facing page.
9 HT 1811—Shipping weight 6 lbs. 7 oz. \$69.50



CRAFTSMAN®
Single-speed
3/8-in. Drill
\$10⁹⁹



CRAFTSMAN®
Single-speed
1/4-in. Drill
\$7⁸⁸

MOTOR, BEARINGS, GEARS: Develops max. 1/5 HP. Single, no-load speed of 1200 rpm. Permanently lubricated ball thrust, sleeve bearings. Double reduction spur gearing.

CHUCK: 3/8-in. cap. Geared chuck threaded for 3/8-in. x 24 spindle.

HOUSING: Thermoset polyester.

ELECTRICAL INFORMATION: Double insulated. 110-120 volts, 60 Hz., AC. 264 watts. UL listed. 6-foot, 2-wire cord.

ORDERING INFORMATION: See warranty and safety note on facing page. Wt. 3 lbs. 10 oz.

9 HT 1142 \$10.99

MOTOR, BEARINGS, GEARS: Develops max. 1/6 HP. Single no-load speed of 2000 rpm. Ball thrust, sleeve bearings... permanently lubricated. Double-reduction spur gearing.

CHUCK: 1/4-in. cap. Geared, threaded for 3/8-in. x 24 spindle.

HOUSING: Thermoset polyester housing.

ELEC. INFO: Double-insulated. 110-120 v., 60 Hz., AC. 240 w. UL listed. 6-ft., 2-wire cord.

ORDER INFO: Warranty, safety note, facing pg. Wt. 3 lbs. 10 oz.
9 HT 1140 \$7.88

CRAFTSMAN® 1/2-inch Drills

- Maximum torque at low speeds for heavy-duty drilling in brick, concrete, steel
- Reversible for backing out stuck bits
- With top-assist handles for 2-hand control

Cases for drills on these 2 pages sold on page 120.



1/2-HP
\$29.50



3/8-HP
\$49.99



3/4-HP
\$59.50
7/8-HP
\$69.50

Sears * Best

1/2-HP, Single-speed Drill

MOTOR, BEARINGS, GEARS: Motor develops maximum 1/2 HP. Single, no-load speed of 525 rpm. Permanently lubricated ball thrust and sleeve bearings. Triple-reduction spur gearing. Trigger switch locks for continuous operation . . . releases quickly. Reversing switch for backing out stuck bits, removing screws. Pintype spindle lock.

CHUCK: 1/2-inch capacity. Geared chuck threaded for 1/2-inch x 20 spindle.

HOUSING: High-impact polymer motor housing; die-cast aluminum gear housing. Top assist handle for 2-hand control removes quickly.

ELECTRICAL INFORMATION: Double insulated . . . needs no grounding. 110-120 volts, 60 Hz., AC. 360 watts. UL listed. 6-foot, 2-wire cord.

ORDER INFO: See warranty, safety note below.

9 HT 11191—Wt. 4 lbs. 10 oz. \$29.50

3/8-HP, Variable-speed Drill

MOTOR, BEARINGS, GEARS: Motor develops maximum 3/8 HP. Trigger pressure controls no-load speeds from 0 to 600 rpm. Permanently lubricated ball thrust, sleeve bearings. Precision helical gears. Motor brushes externally accessible for easy checking or replacement. Reversing switch for backing out stuck bits, removing screws.

CHUCK: 1/2-inch capacity. Geared chuck threaded for 1/2-inch x 20 spindle.

HOUSING: High-impact polymer motor housing; die-cast aluminum gear housing. Top assist handle for 2-hand control removes easily.

ELECTRICAL INFORMATION: Double insulated . . . needs no grounding. 110-120 volts, 60 Hz., AC. 360 watts. UL listed. 6-foot, 2-wire cord.

ORDER INFO: See warranty, safety note below.

9 HT 11129—Wt. 6 lbs. 5 oz. \$49.99

3/4-HP, Variable-speed Drill

MOTOR, BEARINGS, GEARS: Motor develops maximum 3/4 HP. Single speed . . . no load speed of 575 rpm. Permanently lubricated 100% ball, roller bearings. Double-reduction helical gears for smooth, quiet power transmission. Trigger switch locks for continuous operation . . . releases quickly. Toggle-type reversing switch, just flip to back out stuck bits.

CHUCK: 1/2-inch capacity. Geared chuck threaded for 1/2-inch x 20 spindle. Pin-type spindle lock.

HOUSING: Sectional die-cast aluminum with non-glare finish. Removable top handle for 2-hand control. 4-position "D" grip rear handle of high-impact polymer with textured grips.

ELECTRICAL INFORMATION: Double insulated . . . needs no grounding. 110-120 volts, 60 Hz., AC. 600 watts. UL listed. 6-foot, 2-wire neoprene cord.

ORDER INFO: See warranty and safety note at left.

9 HT 11149—Shpg. wt. 9 lbs. 5 oz. \$69.50

FULL ONE YEAR WARRANTY ON CRAFTSMAN PORTABLE ELECTRIC TOOLS

If any Craftsman Portable Electric Tool fails to give complete satisfaction within one year from the date of purchase, return it to the nearest Sears store throughout the U.S., and Sears will replace it, free of charge. If the Craftsman Portable Electric Tool is used for commercial or rental purposes, this warranty applies for only 90 days from date of purchase. This warranty gives you specific legal rights, you may also have other rights which vary from state to state.

SAFETY NOTE: Wear safety goggles when using drills on these 2 pages. . . . see page 75.

CRAFTSMAN® Cordless Electric Drills

Take these drills to the job . . . wherever it is.
Rechargeable power at your fingertips



(1) Cordless 1/4-inch Reversible Drill

Drills up to 80 holes through a pine 2x4 on one charge

\$29.99

Recharger included

MOTOR, BEARINGS, GEARS: Drills up to 80 (1/4-inch) holes through a pine 2x4 on one charge. No-load speed of 300 rpm (maximum on full charge). Permanently lubricated ball thrust and sleeve bearings. Spur gearing. Reversing switch.

CHUCK: 1/4-inch capacity. Geared chuck threaded for 3/8-inch x 24 spindle.

HOUSING: Made of thermoset polyester.

ELECTRICAL INFO: Recharger runs on 110-120 volts, 60 Hz., AC. UL listed. 6-foot, 2-wire cord.

ORDERING INFORMATION: See warranty, safety note above.

9 HT 1111—Shipping weight 3 lbs. 10 oz. . . . \$29.99

(2) **Holster for Cordless 1/4-inch Drill above.** Made of top-grain leather with linen stitching, rivets for long life. 3 partitioned pockets for bits.

ORDERING INFORMATION:

9 HT 45807—Shipping weight 15 oz. \$5.99

(3) Cordless 3/8-inch Reversible Drill

\$49.99

Drills up to 120 holes through a pine 2x4 on one charge . . . double your drilling time with extra power-pak sold separately below

MOTOR, BEARINGS, GEARS: Drills up to 120 (3/8-in.) holes through pine 2x4 on one charge. Power-pak pulls out from back of drill for recharging. Extra power-pak sold separately below. No-load speed of 300 rpm (maximum on full charge). Sleeve bearings are permanently lubricated. Spur gearing. Reversible.

CHUCK: 3/8-in. cap. Geared chuck threaded for 3/8-in. x24 spindle.

HOUSING: Made of thermoset polyester.

ELECTRICAL INFO: Recharger runs on 110-120 volts, 60 Hz., AC. UL listed. 6-foot, 2-wire cord.

ORDERING INFORMATION: See warranty and safety note above.

Shipping weight 5 lbs. 2 oz.

9 HT 1056 \$49.99

(4) **Extra Power-Pak for Cordless 3/8-inch Drill above**

9 HT 11113—Shipping weight 1 pound \$19.99

(5) **Holster for Cordless 3/8-inch Drill above.** Top-grain leather, linen stitching, rivets, 3 partitioned pockets for bits.

9 HT 45808—Shipping weight 15 ounces \$6.99



Recharger included

Extra Power-Pak sold separately

Holster for drill sold separately

With dust pick-up
\$69⁵⁰

CRAFTSMAN® Belt Sanders

Continuous belts let you tackle any large surface with ease... sand wood plastic, even metal!

Without dust pick-up
\$54⁵⁰

- (1) **1-HP Belt Sander**
3x4.7-inch sanding surface with no-load speed of 1300 feet per minute

MOTOR, BEARINGS, GEARS: Develops maximum 1 HP with no-load speed of 1300 ft. per minute. 100% ball bearing motor. Combination spur gear, timing belt drive. Trigger switch. Externally accessible motor brushes.

HOUSING: Combination high-impact polymer and thermoset polyester housing. Aux. grip, belt cover.

SANDING SURFACE: 14 sq. in. Sands flush to vertical surfaces. Includes 1 medium-grit sanding belt. Order extra belts below.

ELEC. INFO: Double-insulated. Needs no grounding. 110-120 v., 60 Hz., AC. UL listed, 6-ft., 2-wire cord.

ORDER INFO: See warranty on page 129. Safety note below. Wt. 12 lbs. 8 oz.
9 HT 1175\$69.50

1-HP Belt Sander above without dust pick-up.
840 watts.

ORD. INFO: Wt. 8 lbs. 9 oz.
9 HT 1172\$54.50

Dust Pick-up for 1 and 1½ HP Belt Sanders. For use with a shop vacuum. Wt. 2 lbs. 3 oz.
9 HT 11765\$9.99

(2)

- (2) **Heavy-duty 1½-HP Belt Sander**

- Sands up to twice as fast as 1-HP Sander
- Big 4x6 in. sanding surface, no-load speed of 1500 feet per minute

MOTOR, BEARINGS, GEARS: Develops maximum 1½ HP with no-load speed of 1500 feet per minute. 100% ball and roller bearings. Combination spur gear and timing belt drive. Trigger switch. Externally accessible motor brushes for easy checking and replacement.

HOUSING: High-impact polymer gear housing. Thermoset polyester motor housing. Auxiliary grip provides firm, 2-hand control. Satin-finished, non-glare, aluminum belt cover. Base with steel wear strip for a more smooth and rigid sanding surface.

SANDING SURFACE: 24 square inches. Sands flush to vertical surfaces. Includes 1 medium-grit sanding belt. Order extra belts below.

ELECTRICAL INFO: Double-insulated. 110-120 volts, 60 Hz., AC. 900 watts. UL listed. 6-foot, 2-wire neoprene cord with 3-inch bend relief.

ORDERING INFO: See warranty on page 129, safety note below.
9 HT 1178C—Shipping weight 18 pounds\$94.50

1½ HP Belt Sander above without dust pick-up
ORDERING INFO: See warranty on page 129, safety note below.
9 HT 1176C—Shipping weight 16 pounds\$79.50

With dust pick-up
\$94⁵⁰

Without dust pick-up
\$79⁵⁰

Exclusive at Sears ... Belt Sander Finishing Stand \$19⁹⁹

Converts your belt sander to a finishing machine. Lets you bring the work to tool. Fits all current Sears 3 or 4-in. sanders. Do heavy-duty work, extended tasks with less operator fatigue. Clamps sander in horizontal position for heavy-duty sanding, in vertical position for touch-ups.

CONSTRUCTION: Carbon steel with black finish. 13x11x3 in. Mounting screws for attaching to wall, table.

ORDERING INFORMATION: Shpg. wt. 7 lbs. 14 oz.
9 HT 25961\$19.99

Safety Note: Be sure to wear safety goggles when using sanders on these two pages. See page 75.

Sanding Belts for sanders above

Aluminum oxides abrasive. Long-lasting; fast-cutting. 1-piece, cloth back. For wood, metal, and plastic surfaces.

GRIT, SIZE AND ORDERING INFO:

Grit	Catalog Number	Wt. oz.	Price each	Price for ten
For 1-HP Belt Sander. 3x21 in.				
X-Fine	9 HT 22304	3	89c	\$8.49
Fine	9 HT 22301	3	89c	8.49
Medium	9 HT 22302	4	89c	8.49
Coarse	9 HT 22303	4	89c	8.49
X-Coarse	9 HT 22305	6	89c	8.49
For 1½-HP Belt Sander. 4x24 in. Best for wood.				
X-Fine	9 HT 22332	4	\$1.19	\$11.29
Fine	9 HT 22333	4	1.19	11.29
Medium	9 HT 22334	5	1.19	11.29
Coarse	9 HT 22335	6	1.19	11.29
X-Coarse	9 HT 22336	7	1.19	11.29
For 1½-HP Belt Sander. 4x24 in. Best for metal.				
Fine	9 HT 22337	4	\$1.19	\$11.29
Medium	9 HT 22338	5	1.19	11.29
Coarse	9 HT 22339	5	1.19	11.29

CRAFTSMAN® 2-speed Sander-Polisher



\$54⁹⁹

MOTOR, BEARINGS, GEARS: Develops maximum ¾ HP with no-load speeds of 4200 rpm for sanding, 3500 rpm for polishing. 100% ball bearings. Helical gears. Trigger switch with lock, quick release. Externally accessible motor brushes for easy checking.

HOUSING: Polished aluminum gear housing; thermoset polyester motor housing; high-impact polymer handles. Built-in front assist handle. With ½-inch spindle.

ACCESSORIES: Includes three 6-in. sanding discs (fine, medium, coarse); 6-in. rubber back up pad; 6-in. lamb's wool polishing bonnet.

ELECTRICAL INFORMATION: Double-insulated. . . no grounding needed. 110-120 volts, 60 Hz., AC. 660 watts. UL listed. 6-foot, 2-wire cord with 3-inch bend relief.

ORDERING INFORMATION: See warranty on page 129, safety note below.

Shipping weight 6 pounds 7 ounces.
9 HT 1152\$54.99

6-inch Aluminum-Oxide Sanding Discs.
GRITS, ORDERING INFORMATION: Pkg. of 6.
9 HT 25293—Fine. Wt. 6 oz.Pkg. 99c
9 HT 25294—Medium. Wt. 7 oz.Pkg. 99c
9 HT 25295—Coarse. Wt. 6 oz.Pkg. 99c

6-inch Lamb's Wool Polishing Bonnet.
ORDERING INFORMATION:
9 HT 2527—Shipping weight 4 ounces. \$1.99



CRAFTSMAN®
1/16 HP
Orbital
Sander
\$15⁸⁷

MOTOR, BEARINGS, GEARS: Direct-drive. Motor develops maximum 1/16 HP. No-load speed of 9200 orbits per minute. Slide switch. Sleeve bearings.

HOUSING: Thermoset polyester. Built-in front assist handle for firm, 2-hand control.

SANDING PAD: ½-sheet; 3½x7 inches. Sandpaper clamp with quick-change lever. Includes medium-grit sanding sheet.

ELECTRICAL INFO: Double-insulated. . . no grounding needed. 110-120 volts, 60 Hz., AC. 156 watts. UL listed. 6-foot, 2-wire cord.

ORDERING INFORMATION: See warranty on page 128, safety note at left.
9 HT 1062—Wt. 5 lbs. 10 oz.\$15.87

Dust Pick-up for Orbital Sander and Dual-action Pad Sanders sold on these two pages
For use with shop vacuums.
ORDERING INFORMATION:
9 HT 11635—Wt. 2 lbs. 1 oz.\$9.99

NOTE: See page 117 for extra sanding sheets, page 120 for cases to fit sanders on these two pages.



Vertical position for touch-ups

Horizontal position for heavy-duty sanding

(1) 9-inch Sander, 7-inch Polisher

MOTOR, BEARINGS, GEARS: Develops maximum 1½ HP with no-load speeds of 4600 rpm for fast sanding, 3600 rpm for fine polishing. 100% ball bearings. Efficient, low-friction spiral bevel gears. Trigger switch with lock, quick release. Externally accessible motor brushes for easy checking.

HOUSING: Non-glare aluminum gear housing; thermoset polyester motor housing; high-impact polymer handles. Removable auxiliary handle fits either side, ¾-in. spindle, spindle lock. Rubber bumper with hang-up bail.

ACCESSORIES: Includes three 9-in. sanding discs (fine, medium, coarse), 9-in. fiber back-up pad, 7-in. and 4½-in. rubber back-up pads, 7-in. lamb's wool polishing bonnet.

ELECTRICAL INFO: Double-insulated . . . no grounding needed. 110-120 v., 60 Hz., AC. 1080 watts. UL listed. 6-foot, 2-wire neoprene cord with 3-inch bend relief.

ORDERING INFO: See warranty on page 129 and safety note on bottom of facing page.

9 HT 1158—Wt. 14 lbs. 4 oz. \$129.50

7-inch Sander Polisher. As above except develops maximum 1¼ HP, 7-inch sanding discs and fiber pad, 3½-inch and 7-inch rubber back-up pads, 1020 watts.

9 HT 1157—Wt. 13 lbs. 14 oz. \$109.50

(2) High-speed 7-inch Sander

Like sander-polisher (1) except develops maximum 1-HP with no-load speed of 4600 rpm for fast sanding; 3½-inch rubber pad, 7-inch fiber pad, sanding discs; 960 watts.

ORDERING INFO: See warranty on page 129, safety note on bottom of facing page.

9 HT 1156—Wt. 13 lbs. 14 oz. \$89.50

Do either rough sanding or fine polishing with either of these tools . . . save time and labor

(1) Our best CRAFTSMAN® Sander-Polisher

- 2-speed motor develops maximum 1½ HP
- Sands with 9-in. disc, polishes with 7-in. bonnet

\$129.50 

**(2) CRAFTSMAN® High-speed, 7-inch Sander**

- 1-speed, develops maximum 1 HP
- Sands with 7-in. disc

\$89.50

(3 thru 6) Accessories for sander-polishers above

Aluminum-oxide Sanding Discs. Tough fiber backing. DIAMETERS, GRITS, ORDERING INFO: Package of 10.

Diameter	Grit	Catalog Number	Shipping weight	Price Pkg.	5 Pkgs. for
7-inch	80/Fine	9 HT 25299	1 lb. 2 oz.	\$4.99	\$21.99
	50/Medium	9 HT 25291	1 lb. 10 oz.	5.29	23.99
	36/Coarse	9 HT 25292	1 lb. 12 oz.	5.49	24.99
9-inch	80/Fine	9 HT 25287	2 lbs. 8 oz.	7.49	33.99
	50/Medium	9 HT 25288	2 lbs. 6 oz.	7.99	35.99
	36/Coarse	9 HT 25289	2 lbs. 8 oz.	8.49	37.99

(3) Lamb's Wool Polishing Bonnet

ORDERING INFORMATION: For 7 and 9-inch sanders above. Shipping weight 5 ounces.

9 HT 2528 \$2.49

(4) Grinding Wheel. For fine finish, aluminum-oxide. Fits ¾-in. spindle.

SIZES, ORDER INFO: Use with safety guard 9 HT 1711 or 9 HT 1712 below.

9 HT 64101—For 7-in. sanders. Shpg. wt. 1 lb. 2 oz. \$4.79

9 HT 64102—For 9-in. sanders. Shpg. wt. 2 lbs. 10 oz. 5.79

(5) Safety Guard for 7-inch Sanders. High-impact polymer. Red.

ORDERING INFORMATION: Use with grinding wheel 9 HT 64101 above.

9 HT 1711—Shipping weight 1 pound 8 ounces \$9.99

Safety Guard for 9-inch Sanders (not shown). Heavy-gauge steel. Black.


ORDERING INFORMATION: Use with grinding wheel 9 HT 64102 above.

9 HT 1712—Shipping weight 2 pounds \$12.99

(6) 5-in. Wire Cup Brush. For paint, rust, scale removal. Steel 0.02-ga. wire.

ORDER INFO: Fits ¾-in. spindle . . . use with 7 and 9-in. sanders.

9 HT 64106—Shipping weight 2 pounds 12 ounces \$7.99

**CRAFTSMAN® Dual-action Pad Sanders**

(7) ½-HP
\$29.50 without dust pick-up

(8) ¼-HP
\$49.50 with dust pick-up

(7 and 8) Dual-action Pad Sanders

MOTOR, BEARINGS, GEARS: Each sands at a no-load speed of 4000 orbits or strokes per minute. Slide switch for orbital or straight-line action. Ball and sleeve bearings. Single-reduction spur gearing.

HOUSING: Thermoset polyester gear and motor housings, handles. Built-in front assist handle for firm, 2-hand control. Counter-balanced design for reduced vibration, less operator fatigue.

SANDING PAD: ½ sheet; 3½x7 inches. Sandpaper clamp with quick-change lever. Includes medium-grit sanding sheet.

ELECTRICAL INFORMATION: Double-insulated . . . no grounding needed. 110-120 volts, 60 Hz., AC. UL listed. 6-foot, 2-wire cord.

(7) ½-HP Pad Sander, without dust pick-up

Runs on 240 watts.

ORDERING INFORMATION: See warranty on page 129, safety note on bottom of facing page.

Shipping weight 5 pounds 4 ounces.

9 HT 1163 \$29.50

¾-HP Pad Sander. (Not shown.)

Like above but with non-glare aluminum housing. 302 watts.

Shipping weight 5 pounds 8 ounces.

9 HT 1164 \$39.50

(8) ¼-HP Pad Sander with dust pick-up

Accessible motor brushes. Enclosed housing, vacuum action. 336 watts.

ORDER INFO: See warranty, p. 129, safety note on bottom of facing page.

9 HT 1165—Wt. 9 lbs. 4 oz. \$49.50

Lamb's Wool Polishing Pads

SIZES, ORDERING INFORMATION: For ½-sheet pad sanders.

9 HT 2530—Wt. 2 oz. 99c

For ¼-sheet pad sanders.

9 HT 2537—Wt. 3 oz. \$1.49



Orbital action is best for rough sanding

Straight-line is best for fine sanding

(9) ½-HP Pad Sanders
without dust pick-up **\$59.50**

with dust pick-up **\$74.50**



More power, greater coverage. Works up to 40% faster than pad sanders (7), (8). **MOTOR, BEARINGS, GEARS:** Develops maximum ½ HP. No-load speed of 4000 orbits or strokes per minute. Trigger switch, safety lock. 100% ball bearings. Single-reduction helical gearing. Externally accessible motor brushes.

HOUSING: Non-glare aluminum gear housing. Thermoset polyester motor housing, handles. Built-in front assist handle for firm, 2-hand control. Counterbalanced for reduced vibration.

SANDING PAD: ½ sheet, 4½x9 inches. Sandpaper clamp with quick-change lever. Medium-grit sanding sheet.

ELECTRICAL INFO: Double-insulated. 110-120 volts, 60 Hz., AC. UL listed. 6-foot, 2-wire neoprene cord with 3-inch bend relief.

ORDERING INFO: See warranty on page 129, safety note on bottom of facing page.

½-HP Pad Sander with dust pick-up . . . Our best Pad Sander. (As shown.)

Enclosed housing . . . keeps work area free of sawdust. 540 watts.

9 HT 1168—Shipping weight 10 pounds 8 ounces \$74.50

½-HP Pad Sander without dust pick-up. (Not shown.) 480 w.

9 HT 1166—Shpg. wt. 9 lbs. 9 oz. \$59.50

COMPK SLAEGD **Sears** 125

Whatever the job... your CRAFTSMAN® Sabre Saw can do more with these Accessories

YOU CAN DO MORE...



Heavy-duty Sabre Saw Table \$39.99

Holds your sabre saw or router steady for greater accuracy... fewer mistakes... less wasted material. All you do is guide workpiece!

Die-cast aluminum top is stronger than ordinary stamped steel tables... with miter gauge and hinged guard. Holds your sabre saw or router steady for edging or cutting. Sabre saw or router mounts quickly beneath table. Fits all CRAFTSMAN® sabre saws and routers (except router 9 HT 1735), most other models.

CONSTRUCTION: Heavy-duty die-cast aluminum top with cast reinforcing ribs underneath. Ridges on top collect sawdust, avoid caking under workpiece. Fence positions adjust by simply unscrewing wingnuts and sliding into place. Fences have holes for attaching wood fences. Heavy-gauge steel legs have holes for mounting on workbench. Hinged guard cover moving blade or bit. Rides up over moving workpiece.

MITER GAUGE: Use to guide workpiece over blade at the exact angle you set. Guided by 3/4-in. slot on table top.

DIMENSIONS: Overall 13 1/4 x 18 x 11 inches high. Table top measures 18 x 13 1/4 inches.

ORDER INFO: Unassembled. Safety note on facing page. 9 HT 25444—Shpg. wt. 11 lbs. 2 oz. \$39.99



(1) Sabre Saw Table
Converts your sabre saw into a stationary work table. Instead of moving the saw, you simply move the workpiece, giving a greater degree of accuracy. Sabre mounts below table. Accepts most models of sabre saws, all CRAFTSMAN® Sabre Saws.

CONSTR.: Heavy-gauge steel. Laminated chip board table top. Sabre saw blade guide and ruler guides printed on table top. 17 1/4 in. wide, 15 in. deep, 11 15/16 in. high. **ORDER INFO:** Unassembled. See safety note on facing page. Shpg. wt. 7 lbs. 12 oz. 9 HT 17417..... \$14.99

(2) Circle-cutting and Edge-guide
For cutting circles, lines, and intricate curves. Use with any CRAFTSMAN® sabre saw. **ORDER INFO:** Wt. 10 oz. 9 HT 27959..... \$2.99

(3) Holder for extra blades, drill bits
Attaches to power cord... keeps sabre saw blades, drill bits close at hand. Chart on side of holder shows sabre blade types and their uses. Snap-open lid. For any CRAFTSMAN® sabre saw. **ORDER INFO:** Wt. 4 oz. 9 HT 2871..... 99c

CRAFTSMAN® Sabre Saws



One-speed develops 1/8-HP \$8.88

Two-speed develops 1/8-HP \$14.99

Variable-speed develops 1/8-HP \$29.50

Variable-speed develops 1/8-HP \$39.50

(4 thru 7) CRAFTSMAN® Sabre Saws

Our sabre saws start their own cuts... no pre-drilling necessary. Bearings are permanently lubricated. Bases tilt 45° right or left. Each has a built-in sawdust blower to keep cutting line clear. Super-fine finishing blade included.

ELECTRICAL INFORMATION: Double insulated... needs no grounding. 110-120 volts, 60 Hz., AC. UL listed. 6-foot, 2-wire cord.

(4) One-speed, 1/8-HP Sabre Saw.
MOTOR, BEARINGS: Develops maximum 1/8 HP. Slide switch. No-load speed of 3200 strokes per minute... 1/2-inch blade stroke. Sleeve bearings. 240 watts.
HOUSING: Thermoset polyester.
ORDER INFO: See warranty, page 129, safety note on facing page. 9HT1717—Wt. 3 lbs. 15 oz. \$8.88

(5) Two-speed, 1/8-HP Sabre Saw.
MOTOR, BEARINGS: Develops max. 1/8 HP. Slide switch. Two no-load speeds of 2600 and 3200 strokes per minute, 1/2-in. blade stroke. Sleeve bearings. 252 watts.
HOUSING: Thermoset polyester.
ORDER INFO: See warranty, page 129, safety note on facing page. 9HT1718—Wt. 4 lbs. 12 oz. \$14.99

(6) Variable-speed, 1/8-HP Sabre Saw.
MOTOR, BEARINGS: Develops maximum 1/8 HP. Slide-switch controls variable speeds. No-load speeds from 0 to 3200 strokes per minute... 1/2-inch blade stroke. 1-inch bevel quadrant. Sleeve bearings. 264 watts.
HOUSING: Thermoset polyester. Also includes edge guide attachment.
ORDERING INFO: See warranty on page 129, safety note on facing page. Wt. 4 lbs. 13 oz. 9 HT 17215... \$29.50

Note: Carrying case for sabre saws on page 120.

(7) Variable-speed, 1/4-HP Sabre Saw.
MOTOR, BEARINGS: Motor develops max. 1/4 HP. Trigger controls variable speeds, with trigger lock for speed consistency. No-loads speeds from 0 to 3600 strokes per min. ... 3/4-in. blade stroke. 1-in. bevel quadrant. Ball and sleeve bearings. Externally accessible motor brushes for easy checking. 288 watts.
HOUSING: Thermoset polyester gear and motor housings, high-impact polymer handle. Cord with 1-in. bend relief. Also includes edge guide and circle-cutting attachment.
ORDER INFO: See warranty, page 129, safety note on facing page. Wt. 5 lbs. 10 oz. 9 HT 1070 \$39.50

(A thru M) CRAFTSMAN® Scroller, Sabre Saw Blades

Heat-treated, precision-ground... self-centering for a straight, clean cut. Metal-cutting blades of M-2 high-speed steel; wood-cutting blades of high-carbon steel. These blades fit most sabre saws.

USES, SIZES, ORDERING INFORMATION:

(A) Super-fine Finishing Blade. Produces smooth, almost splinterless cuts, woods, plastics, laminates to 3/4 in. thick. 20 teeth per inch; 2 1/2 in. long. 9 HT 28761—Package of 2. Shipping weight 3 ounces..... Pkg. \$1.69

Key	Teeth per in.	Uses	Lgth. in.	Catalog Number	Wt. oz.	Pkg. of	Per pkg.
(B)	Knife edge	For smooth cutting of rubber, leather tile, cardboard and wallboard	3	9HT2873	2	2	99c
(C)	32	For mild steel rods, pipe, sheet, etc.	3	9HT28701 9HT28706	2 4	2 10	\$1.09 4.99
(D)	24	For all non-ferrous metals (brass, copper, aluminum, magnesium, etc.)	3	9HT28702 9HT28705	2 3	2 10	1.09 4.99
(E)	14	General-purpose—wood, steel and non-ferrous metals, 1/4-in. or thicker	3 1/2	9HT2874 9HT28745	3 3	2 10	99c 4.49
(F)	10	For hardwood, wallboard, plastic, general crosscutting	3 1/2	9HT28712 9HT28716	3 3	2 10	89c 3.99
(G)	10	For finish cuts in plywood or veneer to 1 1/2 in. thick. Tapered back edge	3	9HT2876 9HT28764	2 3	2 10	1.19 4.99
(H)	10	Kromedge® Scroller Blade specially designed for intricate scroll cuts	3	9HT28781	3	2	1.29
(J)	7	For fast cutting, ripping of soft wood (1x4's to 2x6's), and plasterboard	3 1/2	9HT28711 9HT28715	3 4	2 10	49c 1.99
(K)	7	For cutting wood up to 5 in. thick by saws with 1-in. or longer stroke	6	9HT2875	2	Each	99c
(L)	3	Deep-angle cuts in wood to 5 in. thick by saws with 1-in. or longer stroke	6	9HT2879	2	Each	99c
(M)	7	For cutting flush to wall or joints	3 1/2	9HT2877	3	Each	99c

Package of 14 Blades. One of (B) and (L), two of (C thru G), two of (J). 9 HT 28576—Shipping weight 5 ounces..... Package \$5.99

Here are just some of the things you can do with the scrollers on this page . . .



Circle cuts



Scroll cuts



Plunge cuts



Miter and/or bevel cuts



Cut sheet metal



Edge-guide cutting

Sabre Saws with Automatic Scrolling

Only at Sears! Blade pivots freely as you apply pressure to the handle . . . follows even the most intricate lines of cut without having to turn the saw

(9 and 10) 1/2 and 1/2-HP Automatic Scrolling Sabre Saws

HOUSING: Heat-resistant thermoset polyester motor housing, high-impact polymer handle. Motor brushes externally accessible for easy checking. Counterbalance design smooths out vibration, reduces operator fatigue. Steel base tilts up to 45° right or left for bevel cuts; 1-inch bevel quadrant. Steel saw bar swivels a full 360°. Blade chuck even holds broken blades. Built-in sawdust blower keeps cutting line clear.

ACCESSORIES: Super-fine finishing blade; circle-cutting and edge-guide attachment.

ELECTRICAL INFORMATION: Double insulated . . . needs no grounding. 110-120 volts, 60 Hz., AC. UL listed. 6-foot, 2-wire neoprene cord.



(8) 1/4-HP Sabre Saw with manual scrolling

Turn knob to guide saw and make cuts

\$49⁵⁰

- Trigger-controlled variable speeds
- Cuts with 3/8-inch blade stroke
- Ball and sleeve bearings

Manually-controlled scrolling mechanism lets you cut intricate designs.

MOTOR, BEARINGS: Develops maximum 1/4 HP. Trigger-controlled variable no-load speeds from 0 to 3600 strokes per minute . . . with 3/8-inch blade stroke. Ball and sleeve bearings.

HOUSING: Heat-resistant thermoset polyester. Counterbalance design smooths out vibration, helps reduce operator fatigue. Steel base tilts 45° right or left for bevel cutting. Built-in sawdust blower keeps cutting line clear.

ELECTRICAL INFORMATION: Double-insulated . . . needs no grounding. 110-120 volts, 60 Hz., AC. 290 watts. UL listed. 6-foot, 2-wire cord.

ACCESSORIES: Includes super-fine finishing blade; circle-cutting and edge-guide attachment.

ORDERING INFORMATION: See warranty on page 129, safety note below.

Shipping weight 5 pounds 10 ounces.
9 HT 1072 **\$49.50**

Safety Note
Protect your eyes . . .
use safety goggles
sold on page 75

**Sears Has a Credit Plan
to Suit Most Every Need**
See Big Book or ask for details



(9) 1/2-HP Automatic Scroll Saw

\$59⁵⁰

- Trigger-controlled variable speeds
- Cuts with 3/4-inch stroke
- Ball and sleeve bearings

Sectional, polished aluminum gear housing.

MOTOR AND BEARINGS: Motor develops maximum 1/2 HP. Pull trigger to control variable speeds. No-load speeds from 0 to 3200 strokes per minute . . . with 3/4-inch blade stroke. Variable speeds and longer blade stroke helps blades last longer. Ball and sleeve bearings. Runs on 336 watts.

ORDERING INFORMATION: See warranty on page 129, safety note at left.

Wt. 6 lbs. 10 oz.
9 HT 17251 **\$59.50**



Control dial with 12 speeds lets you match the speed to the job



Side Cutter sold separately

(10) 1/2-HP Automatic Scroll Saw

\$74⁵⁰

- Dial-controlled variable speeds with 12 pre-set speeds
- Cuts with 1-inch blade stroke
- Ball and roll bearings

Sectional, non-glare aluminum housing. With protective blade chip shield.

MOTOR, BEARINGS: Develops maximum 1/2-HP. Dial-controlled variable speed. No-load speeds of 1300 to 2700 strokes per minute . . . trigger locks for speed consistency. Also has rear-mounted control dial with 12 pre-set blade speeds. One-inch stroke with feedback circuitry that helps keep blade consistent. Variable speeds and longer blade stroke help blades last up to 4 times longer. 100% ball bearing motor. Runs on 420 watts.

ORDERING INFORMATION: See warranty on page 129, safety note at left.

Shipping weight 9 pounds 4 ounces.
9 HT 1728 **\$74.50**

(11) Side Cutter Attachment for 1/2-HP Saw above. For flush wall cuts.

ORDERING INFORMATION: Also fits former 9-1726.

Shipping weight 6 ounces.
9 HT 27715 **\$5.99**

SKIL® SAWS WITH WORM-DRIVE

Gearing is the toughest available... stands up to wood, metal, even stone!



\$149.50

Worm-drive gearing is unsurpassed in torque and the ability to handle severe shock loads. Designed to handle the demanding treatment of industry professionals, it can cut through wood, metal, stone, and tough composition materials.

MOTOR, BEARINGS, GEARS: Develops maximum 2 HP... no-load speed of 4400 rpm. 100% ball bearings. High torque worm-drive gearing. Externally accessible spring-loaded motor brushes for easy checking.

BLADE, CUTTING DEPTH: With 7 1/4-inch combination blade... cuts wood up to 2 3/8 inches thick at 90°, up to 1 1/2 inches thick at 45°. With proper blades cuts metal and stone.

HOUSING: Die-cast aluminum gear and motor housings, blade and swing guards, handles. Non-glare satin finish. Two handles for firm control. One-piece wrap-around base with depth, bevel adjustments. Sawdust blower.

ACCESSORIES: SKIL® diamond arbor blade and wrench included.

ELECTRICAL INFORMATION: 110-120-volt, 60-Hertz, AC. 1560 watts. UL listed. 8-foot, 16-gauge, 3-wire rubber cord with strain relief.

ORDERING INFORMATION: Warranted by SKIL® Company. Write for free copy, see page 82. 9 HT 1077C—Shipping weight 21 lbs. ... \$149.50

6 1/2-inch SKIL® Saw. Like above except develops maximum 1 3/4 HP. No-load speed of 4600 rpm. 6 1/2-inch blade... cuts wood up to 2 inches at 90°, up to 1 3/4 inches at 45°. 1375 watts. 9 HT 1076C—Shipping weight 19 lbs. ... \$139.50

8 1/4-inch SKIL® Saw. Like above except motor develops maximum 2 3/4 HP. No-load speed of 4300 rpm. 8 1/4-inch blade... cuts wood up to 2 7/8 inches at 90°, up to 2 1/4 inches at 45°. 1520 watts. 9 HT 1078C—Shipping weight 23 lbs. ... \$159.50

Repl. Comb. Blade for 6 1/2-in. SKIL® saw. 9 HT 32306—Shipping weight 12 oz. \$2.99

Repl. Comb. Blade for 7 1/4-in. SKIL® saw. 9 HT 32307—Shipping weight 12 oz. \$3.99

Repl. Comb. Blade for 8 1/4-in. SKIL® saw. 9 HT 32308—Shipping weight 14 oz. \$3.99



**(1) 7-inch
1 1/4-HP Saw
\$1888**



**(2) 7-inch
1 3/4-HP Saw
\$4450**



**(3) 7 1/4-inch
1 1/4-HP Saw
\$5450**

- No-load speed, 5000 rpm
- Sleeve bearings
- Spur gearing

MOTOR, BEARINGS, GEARS: Develops max. 1 1/4 HP. No-load speed, 5000 rpm. Permanently lubricated sleeve bearings. Spur gearing. Accessible motor brushes.

BLADE, CUTTING DEPTH: With 7-in. combination blade. Cuts wood up to 2 3/8 in. thick at 90°, up to 1 1/2 in. thick at 45°. External blade clutch.

HOUSING: Die-cast aluminum gear housing, blade and swing guards. Thermoset polyester motor housing. High-impact polymer handle. Steel wrap-around base with depth adjustment. Sawdust blower.

ACCESSORIES: Blade, wrench. ELEC. INFO: Double insulated. 110-120-v., 60-Hz. AC. 1020 watts. UL listed. 6-ft., 2-wire cord.

ORDERING INFO: See Warranty and Safety Note on facing page. 9HT1180—Wt. 11 lbs. 6 oz. ... \$18.88

7-inch, 1 1/4 HP. Like saw above but develops maximum 1 1/2 HP. No-load speed, 5100 rpm. 1080 watts. 9HT1181—Wt. 11 lbs. 6 oz. ... \$29.50

Rip Guide for 1 1/4, 1 1/2-HP saws. 9 HT 27679—Wt. 10 oz. ... \$1.99

- No-load speed, 5200 rpm
- Ball and sleeve bearings
- Spur gearing

MOTOR, BEARINGS, GEARS: Develops max. 1 3/4 HP. No-load speed of 5200 rpm. Permanently lubricated ball and sleeve bearings. Spur gearing. Accessible motor brushes.

BLADE, CUTTING DEPTH: With 7-in. combination blade. Cuts wood up to 2 3/8 in. thick at 90°, up to 1 1/2 in. thick at 45°. External blade clutch.

HOUSING: Die-cast aluminum gear housing, blade and swing guards. Thermoset polyester motor housing. High-impact polymer handle and auxiliary grip that provides firm, 2-hand control. Steel wrap-around base with depth adjustment. Sawdust blower.

ACCESSORIES: Blade, wrench, rip guide with 3 1/4-inch face. ELEC. INFO: Double-insulated. 110-120-v., 60-Hz., AC. 1140 w. UL listed. 6-ft., 2-wire cord.

ORDERING INFORMATION: See Warranty and Safety Note on facing page.

Shipping weight 11 lbs. 6 oz. 9 HT 1082 \$44.50

- No-load speed, 5200 rpm
- Ball and sleeve bearings
- Spur gearing

MOTOR, BEARINGS, GEARS: Develops max. 1 1/4 HP. No-load speed of 5200 rpm. Permanently lubricated ball and sleeve bearings. Spur gearing. Accessible motor brushes.

BLADE, CUTTING DEPTH: With 7 1/4-in. combination blade... cuts wood up to 2 3/8 in. thick at 90°, up to 1 1/2 in. thick at 45°. External blade clutch.

HOUSING: Die-cast aluminum gear housing, blade and swing guards. Thermoset polyester motor housing. High-impact polymer handle, auxiliary grip for firm, 2-hand control. Steel wrap-around base with depth adjustment. Sawdust blower.


ACCESSORIES: Includes blade, wrench and rip guide with 4-inch face. ELEC. INFO: Double-insulated. 110-120-volt, 60-Hz., AC. 1140 watts. UL listed. 6-foot, 2-wire cord.

ORDERING INFO: Warranty and Safety Note on facing page.

Shipping weight 11 lbs. 4 oz. 9 HT 1085 \$54.50

Whatever the job... your CRAFTSMAN® Circular Saw can do more with these Accessories

YOU CAN DO MORE...

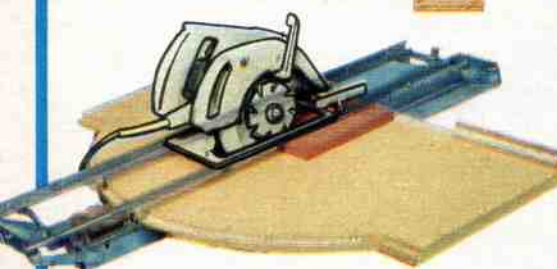

CRAFTSMAN® Miter Arm

Gives your circular saw the accuracy of a radial arm saw

An excellent tool for the person with too little space for a radial saw. Work clamps securely to table. Saw glides on guide rails for accurate angle or compound cuts to 45° right or left. Edge of table has degree guide calibrated in 1° increments. After cutting, miter arm holds saw conveniently out of the way. Can be used to make rabbet and dado cuts (dado set sold at right).

CONSTRUCTION: Aluminum guide rails, table of pressed board, steel clamps. Cuts wood up to 2x12 in. Fits all CRAFTSMAN saws on these 2 pages except 9 HT 1188C. Fits most other saws with a 6-inch or smaller base.

ORDERING INFORMATION: Sent unassembled. See "N" suffix, page 82. Wt. 22 lbs. 9 HT 17151N \$36.99



\$39.99

CRAFTSMAN® Saw Guide for cutting panels

Exclusive with Sears... use as a guide for your circular saw. Cuts any angle through a 4x8 ft. panel.

CONSTRUCTION: Two aluminum guides, with clamps for attaching to top and bottom of panel. Each guide consists of two interlocking sections. Use fully assembled for long cuts, or use individual sections with clamps for short cuts. Cuts panels up to 3/4 in. thick. Guides are 108 in. long.

ORDERING INFO: Sent unassembled. 9 HT 17152—Wt. 9 lbs. 2 oz. \$39.99



Dado Set \$11.99

CRAFTSMAN 3 1/4-inch Dado Set

CONSTRUCTION: Kromedge® steel blades. Width of cut, 3/16 in. Maximum depth of cut, 3/16 in. SET COMPOSITION: Two 1/8-in. chippers, one 1/16-in. chipper. Two 1/4-in. outside cutters. Includes mounting hardware.

ORDERING INFO: Fits all CRAFTSMAN circular saws except 9 HT 1188C and 9-1187C. Wt. 1 lb. 8 oz. 9 HT 3268 \$11.99

Sears has a CRAFTSMAN® Circular Saw for your needs

Each saw has accessible motor brushes for easy checking. All bearings are permanently lubricated.




Each saw does bevel, miter cuts . . . combines both to do compound cuts. Easy-view blade port lets you keep eye on cutting line.



FULL 1-YEAR WARRANTY ON CRAFTSMAN® PORTABLE ELECTRIC TOOLS

If this CRAFTSMAN Portable Electric Tool fails to give complete satisfaction within one year from the date of purchase, return it to the nearest Sears store throughout the U.S., and Sears will replace it, free of charge. If this CRAFTSMAN Portable Electric Tool is used for commercial or rental purposes, this warranty applies for only 90 days from the date of purchase. This warranty gives you specific legal rights, and you may also have other rights that vary from state to state.

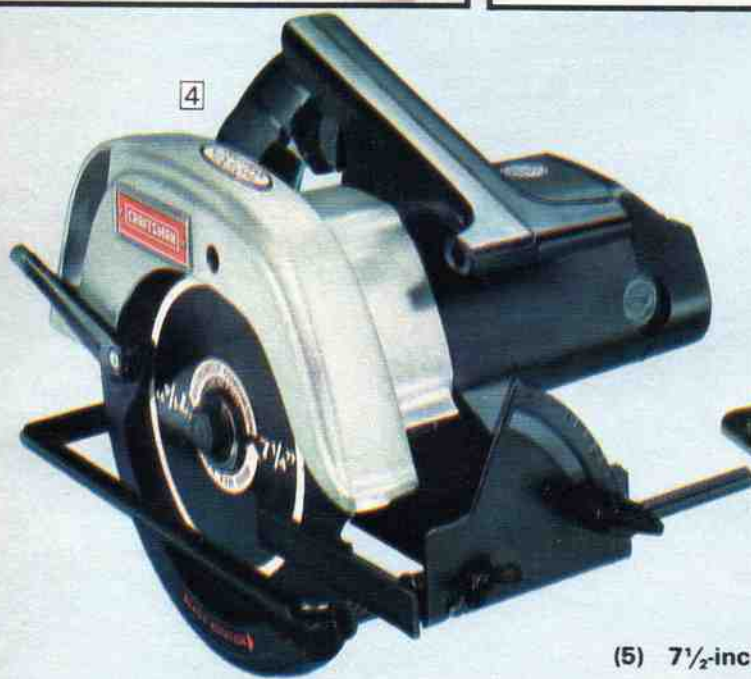

(4) 7 1/4-inch, 2 HP Saw

- No-load speed of 5400 rpm
- Ball and roller bearings
- Precision helical gearing

\$69.50

MOTOR, BEARINGS, GEARS: Develops maximum 2 HP. No-load speed of 5400 rpm. Permanently lubricated ball and roller bearings. Helical gearing. Externally accessible motor brushes . . . spring-loaded for easy checking.

BLADE, CUTTING DEPTH: With 7 1/4-inch combination blade. Cuts wood up to 2 1/4 inches thick at 90°, up to 1 15/16 inches thick at 45°. External blade clutch.

HOUSING: Die-cast aluminum gear housing, blade, and swing guards. Thermoset polyester motor housing. High-impact polymer handle with auxiliary grip for firm, 2-hand control. Steel wrap-around base with depth adjustment. Sawdust blower.

ACCESSORIES: Blade, wrench, rip guide with 4-inch face.

ELECTRICAL INFO: Double insulated. 110-120 volts, 60 Hz., AC. 1320 watts. UL listed. 6-ft., 2-wire cord.

ORDER INFO: See warranty above, safety note below.

9 HT 1086—Shipping weight 11 lbs. 12 oz. \$69.50



(5) 7 1/2-inch 2 1/2-HP Saw

- No-load speed of 5500 rpm
- Ball and roller bearings
- Precision helical gearing
- RIVING KNIFE trails behind blade to guard against binding
- **ELECTRONIC BRAKE** brings blade to a halt as soon as you release the trigger. Imagine a blade spinning at more than 100 m.p.h., yet you can stop it in less than a half a second and put down the saw.

\$109.50

MOTOR, BEARINGS, GEARS: Develops maximum 2 1/2 HP. No-load speed of 5500 rpm. Permanently lubricated ball and roller bearings. Helical gearing. Electronic brake provides instantaneous blade control. Externally accessible spring-loaded motor brushes for easy checking.

BLADE, CUTTING DEPTH: With 7 1/2-inch combination Kromedge® blade . . . cuts wood up to 2 3/4 inches thick at 90°, up to 2 1/4 inches thick at 45°. Easy-to-read vertical scales show cutting depth in 1/16ths of an inch, bevel angles in degrees. Riving knife trails blade. External blade clutch.

HOUSING: Die-cast aluminum gear and motor housings, blade, swing guards. Non-glare satin finish. Thermoset polyester handle with auxiliary grip for firm, 2-hand control. Two-piece aluminum wrap-around base with depth adjustment. Sawdust blower.

ACCESSORIES: Includes blade, wrench, rip-guide with 4-inch face.

ELECTRICAL INFORMATION: Double-insulated. 110-120 volts, 60 Hz., AC. 1440 watts. UL listed. 6-foot, 2-wire neoprene cord with bend relief.

ORDERING INFORMATION: See warranty above and safety note at bottom of this page.

9 HT 1188C—Shpg. wt. 20 lbs. \$109.50

Circular Saw Angle Guide



Circular Saw Gear Lubricant



(6) Circular Saw Guide.

Can be used as a protractor for laying out angle cuts. Use with any portable circular saw or sabre saw. Adjust from 0° to 72° right or left. Steel.

ORDERING INFORMATION:

9 HT 1719—Wt. 2 lbs. 4 oz. . . \$5.99

(7) Circular Saw Gear Lubricant.

Compounded to help keep your circular saw as well as all your other electric tools working smoothly. 4-ounce tube.

ORDERING INFORMATION:

Shipping weight 9 oz.

9 HT 2593 Tube \$1.29

Heavy-duty Circular Saw Table

Holds your saw steady . . . gives you the accuracy of a bench saw

\$39.99

Sold only at Sears, this heavy-duty circular saw table holds your saw steady to give you the accuracy and convenience of a bench saw. Saw mounts quickly, bolts beneath table. Fits most circular saws and all CRAFTSMAN circular saws.

CONSTRUCTION: Rugged steel construction. Miter gauge for guiding workpiece through blade at exact angle. Rip fence for making accurate straight cuts. Safety pull-on/push-off switch. Legs can be screwed into your workbench for permanent mounting, or fold away for easy storage or mounting on wall. Includes instruction booklet with complete illustrations.

DIMENSIONS: 26 3/4 x 15 1/2 x 12 1/4 inches high.

ORDERING INFORMATION:

Saw not included. Sent unassembled.

9 HT 25963C—Shpg. wt. 25 lbs. . . \$39.99

SAFETY NOTE: Wear safety goggles when using saws on these 2 pages . . . see page 75.



Miter gauge for precise angle cuts

Saw mounts quickly beneath table

Legs fold for easy storage . . . portability



CRAFTSMAN® Plywood-cutting Saw

\$39⁹⁹

Light weight, high speed, compact design, rack and pinion depth adjustment . . . all make this saw a specialist for cutting paneling, plywood, trim

MOTOR, BEARINGS, GEARS: Motor develops maximum $\frac{3}{8}$ HP with an extra-fast no-load speed of 7000 rpm. Permanently lubricated ball and roller bearings. Precision helical gearing. Externally accessible motor brushes.

BLADE, CUTTING DEPTH: 4-in. Kromedge® plytooth blade . . . cuts depths up to $\frac{3}{4}$ -in. at 90. Rack and pinion depth adjustment. External blade clutch.

HOUSING: Die-cast aluminum gear housing, blade and swing guards. Thermoset polyester motor housing, handle and built-in auxiliary grip for 2-hand control. Steel wrap-around base. Sawdust blower. Incl. blade wrench, edge guide.

ELECTRICAL INFORMATION: Double-insulated. 110-120-v., 360 w., 60-Hz. AC. UL listed. 6-foot, 2-wire neoprene cord.

ORDERING INFORMATION: See warranty on page 129, safety note below.

9 HT 1189—Shipping weight 9 pounds 12 ounces \$39.99

(1 and 2) CRAFTSMAN® Kromedge® Blades for saw above
CONSTR.: Tough chrome-nickel-molybdenum alloy steel holds a keen cutting edge. Chrome-plated to resist rust, pitch buildup.

(1) 4-in. Chisel-tooth Blade. 30 teeth. For all-purpose sawing; crosscuts, rips, miters in hard or soft woods. For $\frac{1}{2}$ to $\frac{3}{8}$ -inch arbors.
ORDER INFO: See safety note below. Wt. 4 oz.
9 HT 32401 \$2.29

(2) 4-in. Crosscut Blade. 100 teeth. For fine-finish work in plywood, fiberboard woods, veneers. For $\frac{1}{2}$ -inch arbors or $\frac{1}{4}$ -inch electric drill attachments.
ORDER INFO: See safety note below. Wt. 5 oz.
9 HT 32441 \$2.29

CRAFTSMAN® Power Planer

Simplifies all your planing jobs . . . gives fast, smooth, professional-looking results



Planes level surfaces uniformly set dial for thick or thin shavings

Cuts a $\frac{3}{8}$ -in. patch wide enough to plane the broad side of a 2x4 in one pass

Bevels edges . . . grooved base plate guides planer for a uniform 45° cut

Makes rabbet cuts . . . one pass cuts $\frac{1}{8}$ in. deep, $\frac{1}{32}$ in. wide

\$79⁵⁰



MOTOR, BEARINGS: Develops max. $\frac{3}{8}$ HP. No load speed of 15,000 rpm. Accessible motor brushes. Non-slip timing belt. 100% ball bearings.

HOUSING, CUTTER: Non-glare, die-cast aluminum base. Thermoset polyester motor housing, high-impact polymer handles. Clog-free chip chute deflects shavings away from you. Easy-to-read precision scale . . . turn knob to adjust cutting depth. Plane, size, bevel. Twin hardened steel blades on a super-wide 3.62-in. rotary cutter. Trigger switch. Blades remove for sharpening.

ACCESSORIES: Includes 90° door bevel fence guide for accurate sizing . . . make rabbetting path $\frac{1}{8}$ -in. deep, $\frac{1}{32}$ -in. wide. Wrench, blade setting guide.

ELECTRICAL INFORMATION: Double-insulated . . . needs no grounding. 6-ft., 2-wire neoprene cord. 110-120 volts, 60 Hz., AC. UL listed. 540 watts.


ORDERING INFORMATION: Extra blades sold below. See warranty on page 129, safety note on bottom of page.

9 HT 1732—Shpg. wt. 10 pounds 7 ounces \$79.50

Set of 2 Extra Blades for Planer

9 HT 1732E—Shpg. wt. 6 ounces Set \$12.99

CRAFTSMAN® Reciprocating Saw So powerful it cuts not only wood, but also solid aluminum 2 in. thick, cast iron 1 in. thick

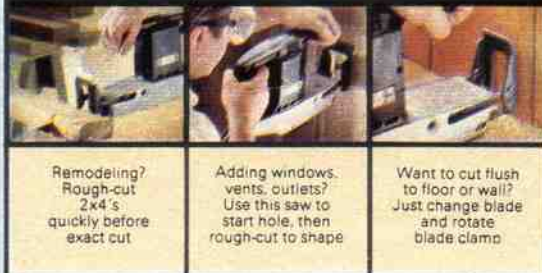

Remodeling? Rough-cut 2x4's quickly before exact cut

Adding windows, vents, outlets? Use this saw to start hole, then rough-cut to shape

Want to cut flush to floor or wall? Just change blade and rotate blade clamp



Cuts logs up to a foot thick with blade (7).

\$64⁵⁰



MOTOR, BEARINGS: Variable-speed motor develops maximum $\frac{1}{2}$ HP. Trigger-controlled variable speed from 0 to 2000 strokes per minute (no-load speed). Long, $\frac{1}{4}$ -inch stroke. Precision steel helical gears. 100% ball bearings.

HOUSING: High-impact polymer motor housing, assist handle. Aluminum motor frame. Blade clamp rotates. $\frac{1}{2}$ -inch steel shank.

ELECTRICAL INFO: Double insulated . . . needs no grounding. 110-120 volts, 60 Hz., AC. 456 watts. UL listed. 6-ft., 2-wire neoprene cord.

ACCESSORIES: Comes complete with 3 blades, wrench.

ORDERING INFO: See warranty on page 129, safety note below.

9 HT 1706—Shipping weight 9 pounds 12 ounces \$64.50

Single-speed, $\frac{1}{8}$ HP Saw (not shown). Like saw above but with single-speed motor, no-load speed of 2000 strokes per minute, and 1-inch stroke. 432 watts. Thermoplastic-jacketed cord.

ORDERING INFO: See warranty on page 129, safety note below.

9 HT 1703—Shipping weight 9 pounds 12 ounces \$49.50

SAFETY NOTE: Be sure to wear safety goggles when using tools on this page . . . see page 75.

Also see tool cases sold on page 120.

(3 thru 7) CRAFTSMAN Reciprocating Saw Blades. Blades (3 thru 5) and (7) fit CRAFTSMAN, Black and Decker, Milwaukee, Pennkraft, Power-Kraft, Skil, Shipmate and Stanley reciprocating saws. Blade (6) fits CRAFTSMAN only.

SIZES, USES, ORDERING INFORMATION:

Item	Catalog Number	Length inches	Teeth per in.	Uses	Wt. each	Each	Five for
(3)	9 HT 28681	6	7	Smooth cuts wood, plastic, comp. board; plunge, scroll cuts	3 oz.	79c	\$3.49
(4)	9 HT 28682	9	3	Fast, rough cuts in wood over 1 inch thick	4 oz.	\$1.19	5.49
(5)	9 HT 28683	6	24	Steel, other metals up to 2 inches thick	3 oz.	99c	4.49
(6)	9 HT 28684	6	7	Flush cuts wood, plastic, nails	3 oz.	99c	4.49
(7)	9 HT 28685	12	7	Smooth, deep cuts through wood, plastic, composition board, hard-board; scroll cuts	4 oz.	\$1.49	6.99

Package of 5 Blades. One each of (3) thru (7).

9 HT 28688—Shipping weight 11 ounces Package \$4.99

Blades for Reciprocating Saw



**This is the first of 4 pages
of Accessories that can turn
your Router into the most
versatile tool in your workshop**

YOU CAN DO MORE...

Cut circular
grooves with
Trammel Point
(page 132)

Route along straight
or curved edges with
Edge Guide
(page 132)

Copy designs or
lettering with
Rout-A-Form
(at left)

Carve hinges
with Mortise
Template Set
(at left)

Turn fine wood pieces
with our exclusive
Router-Crafter (page 134)

Trim counter tops to either
flat or beveled edge with
Plastic-laminate Trimmer (page 132)

Make strong
dovetail
joints
quickly and
easily with
Dovetail
Joint
Fixture
(page 132)

Whatever the job... your CRAFTSMAN® Router can do more
with Accessories sold below and on pages 132 thru 134



Rout-A-Form Pantograph

Carve drawings easily...
you can even use your own designs

\$12.99

USES: Make signs and decorations that have a personal touch. Use with any Sears router to copy designs, lettering, handwriting or even designs of your own. It's easy to use... simply trace pattern to create beautiful wood carvings in three sizes as small as 1/2 size of original.

ACCESSORIES: Includes 52 letters (26 each, upper and lower case), 10 numerals and 10 drawings.

ORDERING INFORMATION: Shipped unassembled. Fits all Sears routers and most other routers.

9 HT 25183C—Shipping weight 4 pounds \$12.99

3-section Template Clamps plus Butt-hinge Template

\$49.99

Complete



USES: Now you can use your router to mortise doors and jambs quickly and accurately. Three-section template clamps guide router for square or round-cornered hinges up to 5 inches long on 2 or 3 hinge doors up to 7 feet high, 3/4 to 2 1/2 inches thick. Butt-hinge template allows you to obtain accurate butt hinges time after time. Set of two, one each for 3 1/2 and 4-inch long hinges.

ORDERING INFO: Use with guide bushings sold below.
9 HT 2564C—Shipping weight 11 pounds Set \$49.99

Butt-hinge Template alone. As described above. Set of 2.

ORDERING INFO: Use with guide bushings sold below.
9 HT 2575—Shipping weight 1 pound Set \$5.99



Template Set with letters and numerals

\$9.99

Make professional-looking signs for your home or business. Just attach clamp to workpiece, insert template, then rout. Mortise figures 2 1/2 inches high. With 40 plates: 26 letters, 9 numerals and 5 punctuation marks.


ORDERING INFO: Use with guide bushings sold below.
9 HT 25182—Shipping weight 4 lbs. 9 oz. Set \$9.99

Replacement plates for template set above

ORDERING INFORMATION: 40 plates.
9 HT 25184—Wt. 1 lb. 8 oz. Set \$5.99

Guide Bushings. Three black-oxide coated steel guides. Incl. one each: 7/16, 5/8 and 1 1/16 inch.

ORDER INFO: Use with templates above and dovetail template on page 132.
9 HT 25069—Shipping weight 15 oz. \$5.99

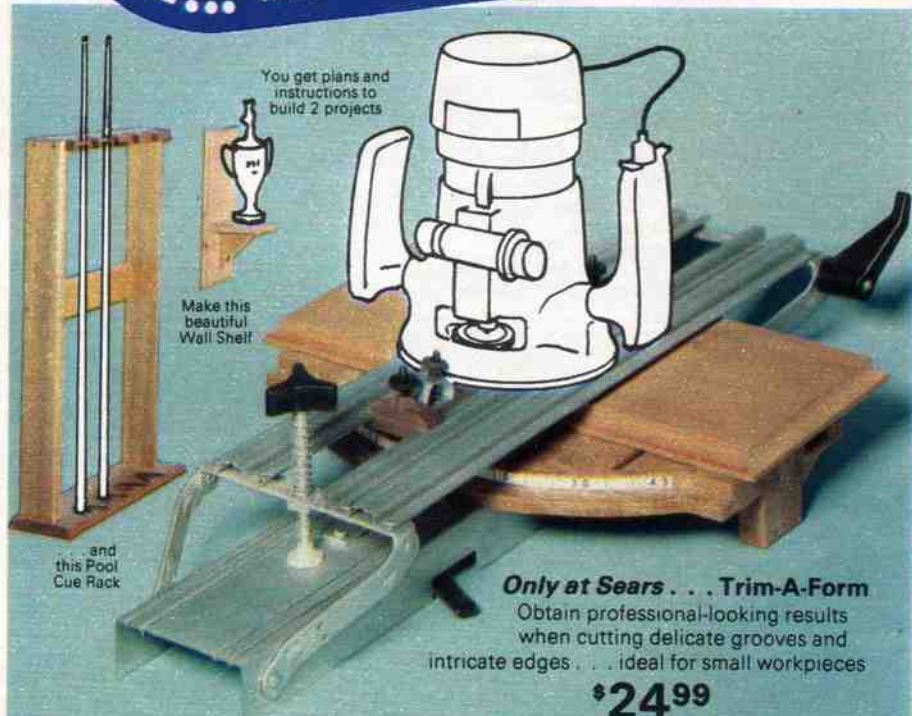

Only at Sears... Trim-A-Form

Obtain professional-looking results
when cutting delicate grooves and
intricate edges... ideal for small workpieces

\$24.99

USES: Now you can easily rout precise edges and grooves. You get the stability and control needed to make delicate cuts in small workpieces. Ideal for putting the finishing touches on plaques and decoupage projects. Router sets-up in seconds from above. Unit can be hung on wall for out-of-the-way storage. Complete instructions and plans for the two work projects shown are included.

CONST: Styrene table swivels and locks 0° to 45° left or right. Unit can be mounted to workbench. Clamp workpiece, pull router thru along steel guide bars. For longer pieces, clamp router and push workpiece thru. For work up to 2 in. high, 8 in. wide, any length.

ORDERING INFORMATION: Fits all Sears routers and most other routers.
9 HT 26269—Shpg. wt. 7 lbs. 5 oz. \$24.99

Only at Sears... Dust Collector Kit


Attach directly to router
to trap dust before it can spread
thru work area... attach to vac
for more efficient pick-up

\$19.99

USES: Unit attaches directly to your router to trap fine sawdust before it can spread throughout work area... helps reduce your clean-up time. For effective pick-up, attach unit to your shop or even home vac through 1 1/4-inch diameter hose (not included).

CONSTRUCTION: High-impact plastic. Includes two attachments: one for use while edge routing, one for use while surface routing and carving. Edge guide helps you direct router. Includes hardware for mounting unit.

ORDERING INFORMATION: Fits all Sears routers except 9-1735.
Shipping weight 1 pound 7 ounces.
9 HT 25185 Kit \$19.99

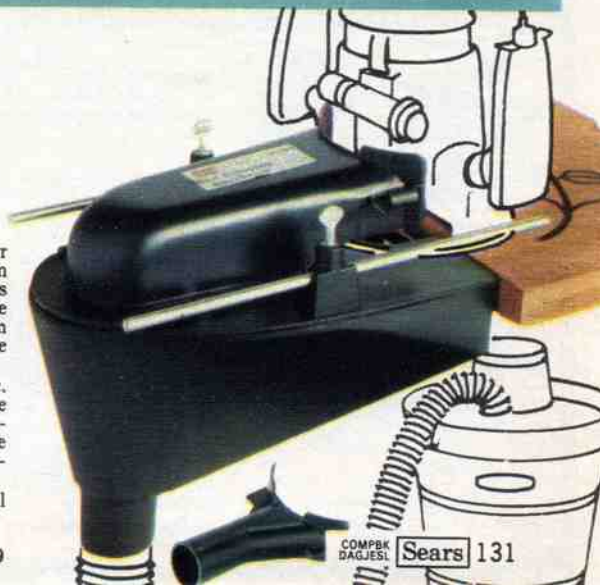

Whatever the job...
your CRAFTSMAN
Router can do more
with these accessories

YOU CAN DO MORE...



Dovetail Joint Fixture

Now you can easily make strong dovetail joints used in fine woodworking projects

\$31.99

USES: Make 1/4-inch cuts for flush, rabbeted dovetail joints. Fixture holds both pieces to be joined for simultaneous cutting. Use on stock up to 12 inches wide, 3/16 to 1 1/2 inches thick. Includes channel plate, plastic comb and clamps.


ORDER INFO: Use with bushings, page 131; bit (28), page 133.
9 HT 2571—Shipping weight 6 pounds 5 ounces.....\$31.99

Dovetail Joint Fixture as above, but for stock up to 8 inches wide, 1/4 or 1/2 inch thick. Bushings are included.

ORDERING INFO: Use with bit (28) sold on page 133.
9 HT 2576—Shipping weight 2 pounds 10 ounces.....\$24.99

1/4-inch Finger Template. Adapts 1/2-inch joint fixture (9 HT 2571) above to make 1/4-inch dovetails.

ORDER INFO: Use with bit (27) sold on page 133.
9 HT 2574—Shipping weight 2 pounds 2 ounces.....\$8.99



(1) Bit Sharpening Kit

HOW IT WORKS: Attach to bottom of router. Insert grinding wheel in chuck, router bit in clamp. Router turns wheel to sharpen steel or carbide-tipped bits. Use with 1/4-in. diam. shank bits. Fits all Sears routers except 9-1735.

ORDERING INFO:
Shpg. wt. 1 lb. 12 oz.
9 HT 6650.....Kit \$24.99




(2) Laminate Trimmer

HOW IT WORKS: Attach to bottom of router to edge and bevel plastic laminate counter tops. Micrometer-type adjustment lets you trim flush along edge for straight or 70° angle cut. Incl. 1/4-in. straight/bevel-cut carbide-tip bit. Fits all Sears routers except 9-1735.

ORDERING INFO:
Shpg. wt. 1 lb.
9 HT 25732.....\$14.99

Extra 1/4-inch Bit for (2). For plastic laminates. Carbide tip.
ORDER INFO: Wt. 3 oz.
9 HT 2541.....\$4.69

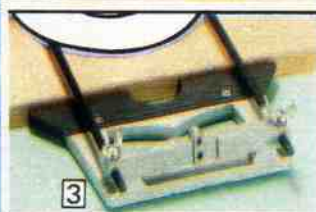


(3) Edge Guide

HOW IT WORKS: Attach to router to make true straight cuts and parallel grooves. Butt guide along edge and direct router along workpiece. Fits all Sears routers except 9-1735.

ORDERING INFO:
Shpg. wt. 1 lb. 11 oz.
9 HT 25172.....\$5.99

Edge Guide as above, but with contour finger... lets you follow curved edges.

ORDERING INFO:
Shpg. wt. 2 lbs.
9 HT 25173.....\$7.99




(4) Tammel Point

HOW IT WORKS: Attach to router to cut accurate circle grooves. Set radius on guide bars, place point in center, rotate router. Cut circles 2 to 26 inches in diameter. Fits all Sears routers except 9-1735.

ORDERING INFO:
Shpg. wt. 13 oz.
9 HT 25174.....\$5.99

Carbide-tipped Router Bits

Our finest bits last up to 15 times longer in soft wood than those on facing page. We use silver alloy to braze extra-hard carbide tips onto Kromedge® bits. This produces long wearing bits that are highly resistant to abrasion. All have 1/4-in. diam. shank

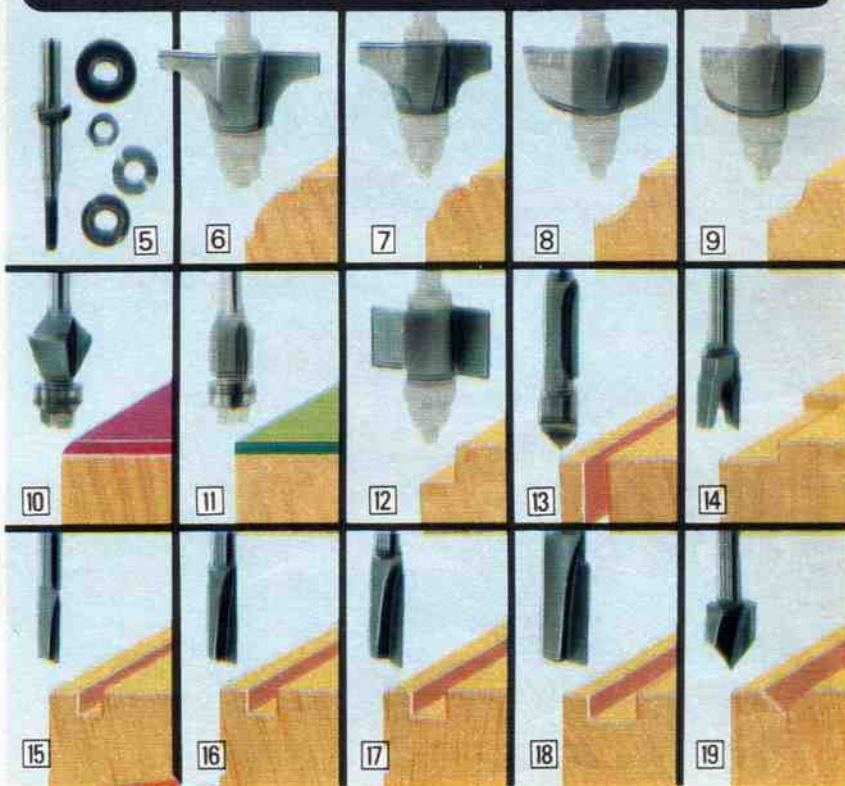

16-piece Router Bit Set **\$134.00**

Includes 14 bits, arbor and case

SET COMPOSITION: One each of items (5) through (19) below plus bit case (9 HT 2558) sold on facing page.

ORDERING INFORMATION:
9 HT 25417—Shipping weight 1 lb. 8 oz.Set \$134.00

(5) Arbor Set. 1/4 inch. With 2 ball bearing pilots (1/2 and 5/8 in.) Use with carbide-tipped bits (6, 7, 8, 9, 12) and (9 HT 25504) below.

ORDERING INFORMATION:
9 HT 25895—Shpg. wt. 3 oz.Set \$5.99

(6 and 7) Bead and Quarter-round Bits

SIZES, ORDER INFO: Use with arbor (5).
(6) 9 HT 25565—1/2 inch. Wt. 3 oz.\$12.39
(7) 9 HT 25566—3/8 inch. Wt. 3 oz.\$11.99

(8 and 9) Cove and Chamfering Bits

SIZES, ORDER INFO: Use with arbor (5).
(8) 9 HT 25575—1/2 inch. Wt. 4 oz.\$12.79
(9) 9 HT 25576—3/8 inch. Wt. 3 oz.\$11.99

(10) 22° Bevel Veneer Cutter. 1/2 inch.

ORDERING INFORMATION:
9 HT 25412—Shipping weight 3 oz.\$9.39

(11) Straight Veneer Trimmer. 1/2 inch.

ORDERING INFORMATION:
9 HT 25413—Shipping weight 3 oz.\$9.39

(12) Rabbet Bit. For 3/16 and 3/8 in. rabbets.

ORDER INFO: Use with arbor (5).
9 HT 25582—Shipping weight 4 oz.\$11.99

(13) Combination Panel Cutter. 3/8 inch.

ORDERING INFORMATION:
9 HT 25541—Shipping weight 3 oz.\$5.09

(14) Butt-hinge Mortising Bit. 1/2 inch. Use with butt-hinge template on page 131.

ORDERING INFORMATION:
9 HT 25551—Shipping weight 3 oz.\$6.39

(15 thru 18) Straight-face Bits

SIZES, ORDERING INFORMATION:
(15) 9 HT 25524—1/4 in. Wt. 3 oz.\$5.09
(16) 9 HT 25525—5/16 in. Wt. 3 oz.\$5.59
(17) 9 HT 25526—3/8 in. Wt. 3 oz.\$5.99
(18) 9 HT 25527—1/2 in. Wt. 4 oz.\$6.79

(19) V-groove Chamfering Bit. 1/2 inch.

ORDERING INFORMATION:
9 HT 25578—Shipping weight 3 oz.\$8.49

Bead, Quarter-round Bit (not shown). 1/4 in.

ORDER INFO: Not included in set.
9 HT 25503—Shipping weight 3 oz.\$11.99

Straight-face Bits (not shown).

SIZES, ORDER INFO: Not included in set.
9 HT 25506—3/4 inch. Wt. 4 oz.\$11.99
9 HT 25507—5/32 inch. Wt. 4 oz.\$12.99

Dovetail Cutter (not shown). 1/2 inch. Use with dovetail joint fixture above, left.

ORDER INFO: Not included in set.
9 HT 25505—Shipping weight 3 oz.\$8.69

Roman Ogee Bit (not shown). 1/4 inch.

ORDER INFO: Use arbor (5). Not in set.
9 HT 25504—Shipping weight 4 oz.\$11.99

CRAFTSMAN® Face Shield. Helps protect you from wood chips and other debris when using router or other portable electric tool. Clear polycarbonate shield measures 8x11 1/2 inches. Adjustable head gear. Meets American National Standards Institute Z87.1, 1968 standards.

ORDERING INFORMATION: See our complete selection of safety equipment, page 75.

Shipping weight 1 pound 1 ounce.
9 HT 18613.....Each \$6.99
Price for 3 or more.....Each 6.29




Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details

High-speed Kromedge® Router Bits

These bits stay sharp up to 5 times longer than ordinary steel bits. Precision-ground from chrome-nickel-molybdenum steel fortified with chromium for tough, sharp cutting edge. All have 1/4-in. diam. shank.

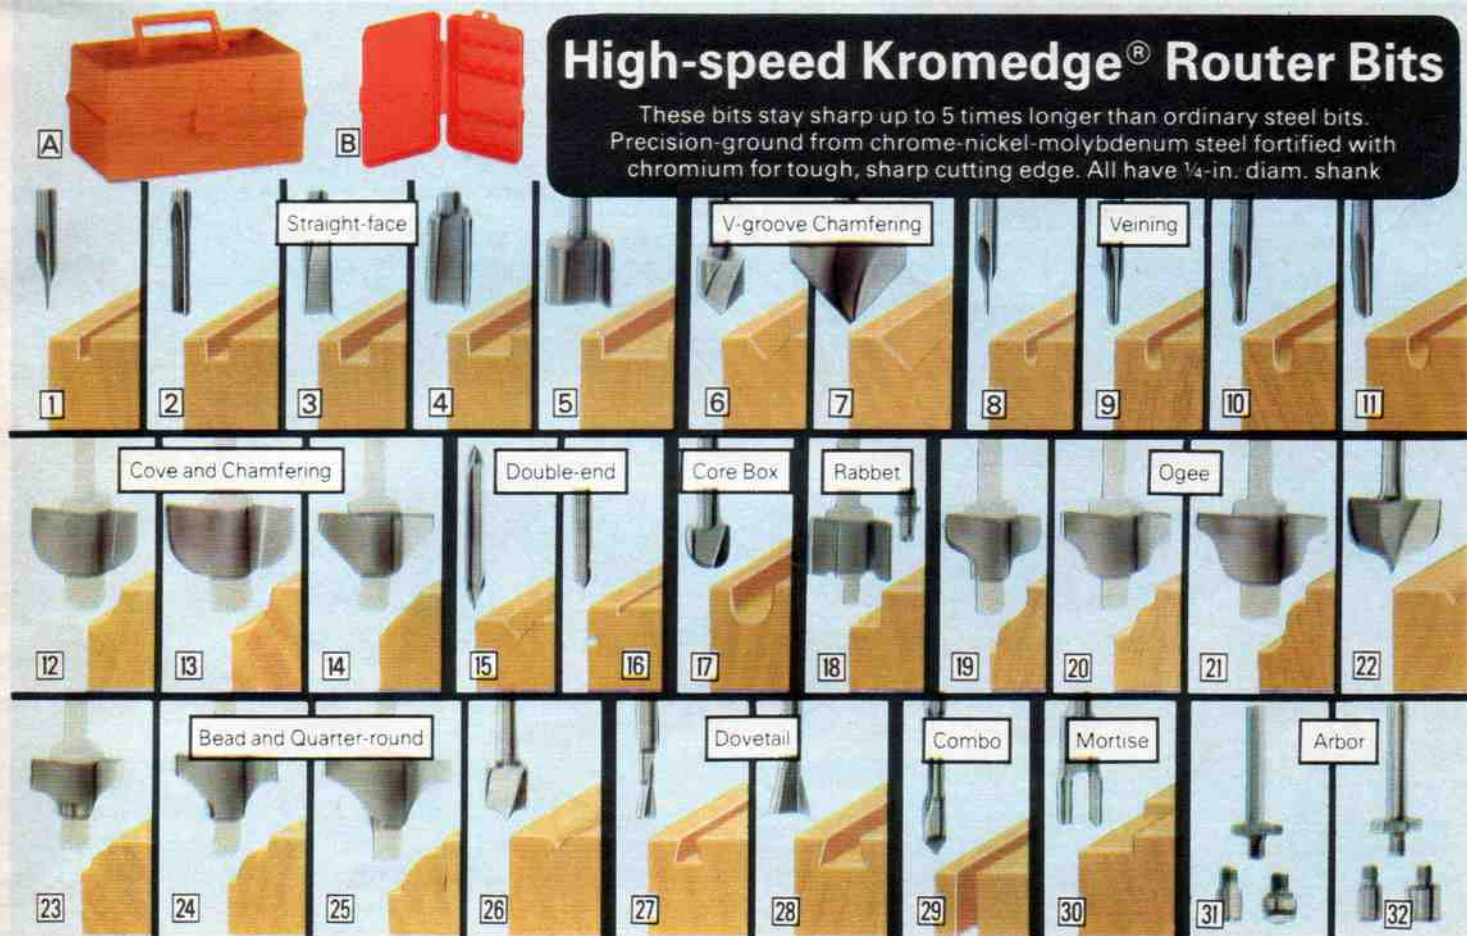

Individual Kromedge® Router Bits

TYPES, SIZES AND ORDERING INFORMATION:

Item	Description	Size	Catalog No.	Wt.	Price
(1)	Straight-face	1/8 in.	9 HT 2552	3 oz.	\$1.79
(2)	Straight-face	1/4 in.	9 HT 25521	3 oz.	2.09
(3)	Straight-face	3/8 in.	9 HT 25522	3 oz.	2.69
(4)	Straight-face	1/2 in.	9 HT 25523	3 oz.	3.19
(5)	Straight-face (not shown)	3/4 in.	9 HT 25529	3 oz.	4.99
(6)	V-groove Chamfering	1/16 in.	9 HT 25528	3 oz.	1.89
(7)	V-groove Chamfering	1/8 in.	9 HT 2557	3 oz.	4.49
(8)	Veining	1/8 in.	9 HT 25579	3 oz.	6.29
(9)	Veining	3/16 in.	9 HT 2559	2 oz.	2.29
(10)	Veining	1/4 in.	9 HT 25592	3 oz.	2.49
(11)	Veining	3/8 in.	9 HT 25593	3 oz.	2.69
(12)	Veining	1/2 in.	9 HT 25594	3 oz.	3.19
(13)	Cove	3/8 in.	9 HT 25572	3 oz.	4.09
(14)	45° Chamfering	1/2 in.	9 HT 25571	3 oz.	4.49
(15)	Double-end 45°/60° V-groove	1/16 in.	9 HT 25589	3 oz.	4.49
(16)	Double-end straight/veining	1/8 in.	9 HT 25545	3 oz.	3.19
(17)	Core Box	1/2 in.	9 HT 25599	3 oz.	4.49
(18)	Rabbet with pilot*	1/8 in.	9 HT 25596	3 oz.	3.59
(19)	Ogee	3/16 in.	9 HT 25581	3 oz.	5.39
(20)	Roman Ogee	3/32 in.	9 HT 25585	3 oz.	5.39
(21)	Roman Ogee	1/4 in.	9 HT 25587	3 oz.	5.39
(22)	Point Cutting Ogee*	3/4 in.	9 HT 25586	3 oz.	6.29
(23)	Bead and Quarter-round	3/8 in.	9 HT 25583	3 oz.	5.39
(24)	Bead and Quarter-round	1/2 in.	9 HT 25562	3 oz.	4.09
(25)	Bead and Quarter-round	3/4 in.	9 HT 25561	3 oz.	4.99
(26)	Point Cutting Quarter-round*	1/16 in.	9 HT 25567	3 oz.	4.09
(27)	Dovetail Cutter†	1/4 in.	9 HT 2553	3 oz.	4.09
(28)	Dovetail Cutter‡	1/2 in.	9 HT 25531	3 oz.	4.49
(29)	Combination Panel Cutter	1/4 in.	9 HT 2554	3 oz.	3.19
(30)	Butt-hinge Mortising*	1/2 in.	9 HT 2555	3 oz.	3.19

*Cuts 1/4, 3/16, 1/8 in. rabbets; 1/16 in. surface cuts

†Use with Router-Crafter sold on page 134

‡Use with Dovetail Fixtures sold on page 132

*Use with Butt-hinge Template sold on page 131

(31) **3-piece Ball-bearing Arbor Set.** 1/4-in. With one 7/16-in. ball-bearing pilot and one 1/16-in. solid-type pilot. Use with bits (12, 13, 14, 18, 19, 20, 21, 23, 24, 25) above.

ORDERING INFORMATION:
9 HT 25601—Shipping weight 6 ouncesSet \$3.99

(32) **3 piece Arbor Set.** 1/4-in. With two solid-type pilots, 7/16 and 3/16-in. See (31) above for bits requiring arbor.

ORDERING INFORMATION:
9 HT 2589—Shipping weight 3 ouncesSet \$2.69

(33) **Bit Case.** Plastic. Holds 44 bits.

ORDERING INFORMATION:
9 HT 2558—Shpg. wt. 14 oz.\$4.99

(34) **Router Case.** Permanex® polyethylene. Slides in lid hold bits. Measures 12 1/2 x 10 3/4 x 7 1/4 inches.

ORDERING INFORMATION:
9 HT 1458—Shpg. wt. 3 lbs.\$10.99

10-piece Router Bit Set

Includes 7 bits, arbor, 2 pilots plus storage case **\$22.99**

SET COMPOSITION: 1/8, 3/16, 1/4-in. straight-face bits; 1/2-in. V-groove chamfering bit; 1/16, 1/8-in. veining bits; 1/2-in. bead and quarter-round bit; 1/4-in. x 28-thread arbor with 2 pilots. Includes case (B) shown above.

ORDER INFO: Separate prices total \$25.02.
9 HT 25517—Shpg. wt. 8 oz.Set \$22.99

9-piece Router Bit Set

Includes 5 bits, arbor, 2 pilots plus storage case **\$26.99**

SET COMPOSITION: 1/2-in. cove bit; 45° chamfering bit; 3/16-in. ogee bit; 1/4-in. Roman ogee bit; 1/4-in. bead and quarter-round bit; 1/4-in. x 28-thread arbor with 2 pilots. Includes case (A) shown above.

ORDER INFO: Separate prices total \$32.43.
Shipping weight 1 pound 6 ounces.
9 HT 25424Set \$26.99

17-piece Router Bit Set

Includes 12 bits, arbor, 3 pilots plus storage case **\$44.99**

SET COMPOSITION: 1/8, 1/4, 3/8, 1/2-in. straight bits; 1/2-in. V-groove chamfering bit; 1/16, 1/8, 1/4-in. veining bits; 3/8-in. cove bit; rabbet bit with pilot (cuts 1/4, 3/16, 1/8-in. rabbets, 1/16-in. surface cuts); 3/8-in. bead and quarter-round bit; 1/4-in. combination panel cutter; 1/4-in. x 28-thread arbor with 2 pilots. Includes case (A) shown above.

ORDER INFO: Separate prices total \$47.06.
Shipping weight 2 pounds 2 ounces.
9 HT 25447Set \$44.99

26-piece Router Bit Set

Includes 21 bits, arbor, 3 pilots plus storage case **\$90.00**

SET COMPOSITION: 1/16, 1/8, 1/4, 3/8, 1/2, 3/4-in. straight bits; 1/2-in. V-groove chamfering bit; 1/16, 1/8, 1/4-in. veining bits; 3/8, 1/2-in. cove bits; rabbet bit with pilot (cuts 1/4, 3/16, 1/8-in. rabbets, 1/16-in. surface cuts); 3/16-in. ogee bit; 3/32-in. Roman ogee bit; 1/4, 3/8, 1/2-in. bead and quarter-round bits; 1/2-in. dovetail cutter; 1/2-in. butt-hinge mortising bit; 1/2-in. carbide-tipped straight veneer trimmer; 1/4-in. x 28-thread arbor with 2 pilots. Includes case (A) shown above.

ORDER INFO: Separate prices total \$91.97.
9 HT 25448—Wt. 2 lbs. 9 oz.Set \$90.00

Our largest Router Bit Set has 39 pieces for wide range of cuts

Includes 31 bits, 2 arbors, 5 pilots plus storage case **\$134.99**

SET COMPOSITION: 1/8, 1/4, 3/8, 1/2, 3/4-in. straight bits; 1/2, 3/8-in. V-groove chamfering bits; 1/16, 1/8, 3/32, 1/4-in. veining bits; 3/8, 1/2-in. cove bits; 45° chamfering bit; double-end 45°/60° V-groove bit; 1/16-in. double-end straight/veining bit; 1/2-in. core box bit; rabbet bit with pilot (cuts 1/4, 3/16, 1/8-in. rabbets, 1/16-in. surface cuts); 3/16-in. ogee bit; 3/32, 1/4-in. Roman ogee bits; 3/32-in. point cutting ogee bit; 1/4, 3/8, 1/2-in. bead and quarter-round bits; 3/16-in. point cutting quarter-round bit; 1/4, 1/2-in. dovetail cutters; 1/4-in. combination panel cutter; 1/2-in. butt-hinge mortising bit; 1/4-in. carbide-tipped combination straight/bevel bit for plastic laminates; two 1/4-in. x 28-thread arbors with 4 pilots. Includes case (A) shown above.

ORDER INFO: Separate prices total \$136.06.
Shipping weight 2 pounds 3 ounces.
9 HT 25425Set \$134.99

(35) **New CRAFTSMAN® Portable Electric Tool Handbook.** Features instructions on use of the router. Includes standard and special operations; use of accessories. Other chapters on use of hand drill, portable saws and sanders, power planer, rotary grinder. Over 200 operations described, illustrated. 96 pages.

ORDERING INFORMATION:
9 HT 2949—Shpg. wt. 14 oz.\$5.99



Only at Sears...

CRAFTSMAN® Router-Crafter


Converts your router into a precision lathe-like tool for turning out fine wood pieces without the need for chisels or intricate measuring

So easy to use... here's how:

- Mount workpiece (up to 3 inches square, 36 inches long) between headstock and tailstock
- Attach router to sliding platform... most routers with $\frac{1}{4}$ -in. shank bits can be used
- Just set dial for uniform spacing... lets you turn out duplicates
- Crank handle to move router platform for lengthwise cuts, straight or spiral

Without router, bits
\$59⁹⁹

Make beautiful furniture pieces like these

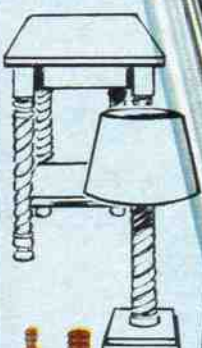

... from simple cuts like these



9-piece Bit Set for Router-Crafter
\$27⁹⁹

Fashion distinctive furniture pieces. Use with any Sears or other brand router over $\frac{1}{2}$ HP that uses $\frac{1}{4}$ -in. diameter shank bits.

CONSTRUCTION: Die-cast aluminum headstock, tailstock, platform. Chrome-plated steel tubes and crank. Steel cable. Includes screws for mounting router and instructions. 45x8 $\frac{1}{2}$ x7 in. high.

ORDERING INFORMATION: Router not incl. Order bits below.
9 HT 2525C—Shipping weight 12 pounds **\$59⁹⁹**

9-piece Kromedge® Router Bit Set. Includes rabbit bit, $\frac{3}{32}$ -in. point cutting ogee bit, $\frac{1}{2}$ -in. core box bit, $\frac{3}{8}$ -in. V-groove chamfering bit, $\frac{3}{16}$ -in. point cutting quarter round bit, $\frac{1}{4}$ -in. veining bit, $\frac{1}{4}$ -in. arbor with 2 pilots. $\frac{1}{4}$ -in. shanks. Plastic case.
ORDERING INFORMATION:
9 HT 25427—Shipping weight 10 ounces Set **\$27⁹⁹**

6-piece Kromedge® Router Bit Set. (Not shown). Includes rabbit bit, $\frac{3}{32}$ -in. point cutting ogee bit, $\frac{1}{2}$ -in. core box bit, $\frac{1}{4}$ -in. arbor with 2 pilots. $\frac{1}{4}$ -in. shanks. With plastic case.
ORDERING INFORMATION:
9 HT 25426—Shipping weight 9 ounces Set **\$16⁹⁹**

Heavy-duty Router/Sabre Saw Table

Our exclusive design has die-cast aluminum top, miter gauge and hinged guard. Gives you the support needed to shape decorative edges and obtain accurate straight cuts

Holds your router or sabre saw



Cast-reinforcing ribs under top prevent sagging, provide sturdy work surface

Change fence positions quickly... just loosen wingnuts, reposition and tighten

Miter gauge lets you guide workpiece thru bit or blade at exact angle you set



Hinged guard covers moving bit or blade, rides up as you push workpiece thru

Ridges on table collect sawdust to avoid caking, workpiece remains level

Router, saw not included

\$39⁹⁹

Our exclusive design includes die-cast aluminum top that makes this table stronger than ordinary tables with stamped steel tops, plus you get a miter gauge and hinged guard.

USES: Holds either router or sabre saw for edging and cutting operations. Tool mounts easily from below.

MITER GAUGE: Lets you guide workpiece over bit or blade at the exact angle you set. Guided by $\frac{3}{4}$ -inch slot on table top.

HINGED GUARD: Covers moving bit or blade, rides over moving stock.

CONSTRUCTION: Heavy-duty, die-cast aluminum top mounted on stamped steel legs. Cast-reinforcing ribs under top. Ridges on top collect sawdust to avoid caking under workpiece. Fence positions adjust quickly by simply loosening wingnuts. Metal fences have holes for attaching wood fences (not included). Legs have holes for mounting to workbench. Measures 13 $\frac{1}{4}$ x18x11 inches high overall.

ORDERING INFORMATION: Router, Sabre Saw not included. Shipped unassembled.
9 HT 25444—Wt. 11 lbs. 2 oz. **\$39⁹⁹**

SAFETY NOTE: Protect your eyes... wear safety goggles sold on page 75 when using routers and other portable electric tools

Steel Router Table provides firm work surface **\$14⁹⁹**

Gives you a smooth, stable work surface... holds router steady during edging operations for accurate shaping.

CONSTRUCTION: Heavy-gauge steel top, legs and fixed-position fences. Metal fences have holes for attaching wood fences (not included). Legs have holes for mounting to workbench. Measures 18x13 $\frac{1}{2}$ x11 inches high.

ORDERING INFORMATION: Router not included. Shipped unassembled.
9 HT 25446—Shipping weight 8 lbs. 2 oz. **\$14⁹⁹**

New Dust Collector Kit fits most router tables **\$9⁹⁹**

New at Sears... attach to back of router table to collect dust before it can spread throughout work area. For maximum efficiency, attach unit to shop or home vac through $\frac{1}{4}$ -inch diameter hose (not included).

CONSTRUCTION: High-impact plastic. Dust deflector covers bit to direct dust back into collection bin. Hardware for mounting included.

ORDERING INFORMATION: Fits all Sears tables and most other brands.
9 HT 25186—Shpg. wt. 1 lb. 1 oz. Kit **\$9⁹⁹**



CRAFTSMAN® Routers can help you transform rough stock into attractive decorations and beautifully crafted pieces of furniture

YOU CAN DO MORE...
Whatever the job... your CRAFTSMAN® Router can do more with Accessories sold on pages 131 thru 134



CRAFTSMAN® Heavy-duty 7/8-HP Router with built-in spindle lock and chip deflector \$59.50

MOTOR, BEARINGS: 7/8-HP motor generates shaft speed of 25,000 rpm. Accessible motor brushes. 100% ball bearings for dependable service.
CHUCK: Self-extracting, collet-type chuck grips 1/4-inch diameter shank bits. Built-in spindle lock lets you change bits quicker and easier than router sold below. Wrench for changing bits included.
DEPTH GAUGE: Visual depth gauge with easy-to-read graduations to 32nds of an inch for cuts to 1 1/2 inches deep.
HOUSING: Die-cast aluminum base and motor housing, high-impact polymer end cap and handles. Slide-action switch located on front of motor housing. Chip deflector eye shield lets you view work surface more clearly than router below.
ELECTRICAL INFO: Double-insulated... needs no grounding. 110-120-volt, 60-Hertz AC. 720 watts. UL listed. With 6-foot, 2-wire cord.
ORDERING INFORMATION: See Warranty and Safety Note below.
9 HT 1736—Shipping weight 8 pounds... \$59.50

CRAFTSMAN® 1/2-HP Hobby Router \$29.50

MOTOR, BEARINGS: 1/2-HP motor generates shaft speed of 25,000 rpm. Accessible motor brushes. 100% ball bearings.
CHUCK: Self-extracting, collet-type chuck grips 1/4-in. diameter shank bits. With 2 wrenches.
DEPTH GAUGE: Ring-type depth gauge graduated to 32nds of an inch for cuts to 1 1/2 inches deep.
HOUSING: Die-cast aluminum base, glass-reinforced polyester motor housing, high-impact polymer end cap and handles. Slide-action switch on end cap.
ELECTRICAL INFO: Double insulated. 110-120-volt, 60-Hertz AC. 520 watts. UL listed. With 6-foot, 2-wire cord.
ORDERING INFO: See Warranty and Safety Note below.
9 HT 1735—Wt. 6 lbs... \$29.50



FULL ONE YEAR WARRANTY ON CRAFTSMAN ROUTERS

If this Craftsman Router fails to give complete satisfaction within one year from the date of purchase, return it to the nearest Sears store throughout the United States, and Sears will replace it, free of charge. If this router is used for commercial or rental purposes, this warranty applies for only 90 days from the date of purchase. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

SAFETY NOTE: Play it safe... use safety goggles when using routers and other portable electric tools. See our complete selection on page 75.

Sears Has a Credit Plan to Suit Most Every Need
See Big Book or ask for details



CRAFTSMAN® 1-HP Router has the power to cut thru hard wood and the control to carve delicate edges \$79.50

Here are a few reasons why this router is so outstanding:

- Contour handles have textured finish for positive grip... on/off switch located on handle for continuous two-hand control
- Precision-ground thread on depth gauge allows accurate adjustments to a 64th of an inch
- Zero-reset feature makes it simple to obtain identical depths on repeat cuts
- Self-extracting collet and spindle lock simplify bit changing
- Built-in light and clear chip deflector let you see work clearly

MOTOR, BEARINGS: Powerful 1-HP motor generates fast shaft speed of 25,000 rpm. Accessible motor brushes allow easy checking or replacement. 100% ball bearings for dependable service.
CHUCK: Self-extracting, collet-type chuck grips 1/4-inch diameter shank bits. Built-in spindle lock for quick, easy bit changes. With wrench for changing bits.
DEPTH GAUGE: Visual depth gauge has zero-reset feature... lets you obtain identical depth setting on repeat cuts faster and easier than with routers at left. Graduated to 64ths of an inch for cuts to 1 1/2 inches deep.
HOUSING: Die-cast aluminum base and motor housing, high-impact polymer end cap and handles. Trigger switch conveniently located on handle. Clear chip deflector eye shield lets you view work easily.
ELECTRICAL INFO: Double-insulated... needs no grounding. 110-120-volt, 60-Hertz AC. 780 watts. UL listed. 6-foot, 2-wire neoprene cord with bend relief.
ORDERING INFORMATION: See Warranty and Safety Note at left.
9 HT 1748—Shipping weight 8 pounds 6 ounces... \$79.50

Router as above, but without zero-reset feature on depth gauge.
ORDERING INFORMATION: See Warranty and Safety Note at left.
9 HT 1747—Shipping weight 8 pounds 6 ounces... \$69.50

Turn the page to see SUPER-ROUTER
... our newest, most powerful router

SUPER-ROUTER

Our finest CRAFTSMAN® Router even vacuums up after itself... 1½-HP motor gives you at least 50% more cutting power than any router we've offered before

(A) Exclusive dust pick-up traps dust before it can spread through work area. Reduces dust in cutting area so you can view bit and workpiece clearly... helps you make fast, accurate cuts. 90% of dust produced on full-surface cuts is drawn up through handle and captured in bag... helps reduce cleanup time.

(B) 1½-HP motor gives you at least 50% more cutting power than any of our other routers. Generates fast shaft speed of 25,000 rpm... that's enough power to slice through hard wood such as oak or walnut.

(C) Precise ring-type depth gauge yields more accurate settings than conventional gear-type adjustment. Obtain micrometer-like accuracy... make adjustments anywhere between 0 and 1½ inches.

(D) Large contour-grip handles and wide smooth-gliding sub base give you excellent stability and control. Built-in light illuminates work area for more accurate pattern cutting.

In addition to these great features, we back this router with a Full One Year Warranty... see details below.

*Sears * Best*

\$119⁵⁰

MOTOR, BEARINGS: Powerful 1½-HP motor generates shaft speed of 25,000 rpm. Accessible motor brushes allow easy checking or replacement. 100% ball bearings for dependable service.

CHUCK: Self-extracting, collet-type chuck grips ¼-inch diameter shank bits. Built-in spindle lock allows quick, simplified bit changes. Includes wrench for changing bits.

DEPTH GAUGE: Large graduated ring and needle pointer make accurate settings readily obtainable. Graduated to 64th of an inch for cuts to 1½ inches deep.

HOUSING: Die-cast aluminum base and motor housing. Flat-top, high-impact polymer end cap provides stable surface during bit changes. Large contour-grip handles with trigger-switch permit continuous two-hand control. Vacuum-action draws dust up through handle and into bag. Smooth-gliding phenolic plastic sub base won't mar wood the way metal bases can. With built-in light and clear chip deflector eye shields.

ELECTRICAL INFORMATION: Double-insulated... needs no grounding. Uses 110-120-volt, 60-Hertz AC. 960 watts. UL listed. 6-foot, 2-wire neoprene cord with bend relief.

ORDERING INFORMATION: Use safety goggles sold on page 75. See warranty below.

Shipping weight 10 pounds 2 ounces.
9 HT 1740.....\$119.50

Router as above but without dust pick-up

ORDERING INFORMATION: Use safety goggles sold on page 75. See warranty below.

Shipping weight 9 pounds 2 ounces.
9 HT 1739.....\$99.50

FULL ONE YEAR WARRANTY ON CRAFTSMAN® ROUTER.

If any Craftsman Router fails to give complete satisfaction within one year from the date of purchase, return it to the nearest Sears store throughout the U.S., and Sears will replace it, free of charge.

If the Router is used for commercial or rental purposes, this warranty applies for only 90 days from the date of purchase.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

SEARS, ROEBUCK AND CO.

F7495 COMPEKLAEGJD RF9-83064

